



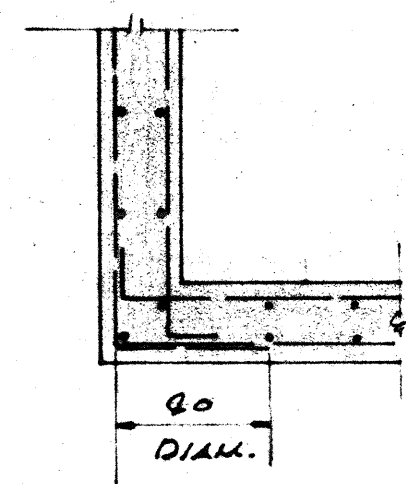


CORNER

DOUBLE MAT

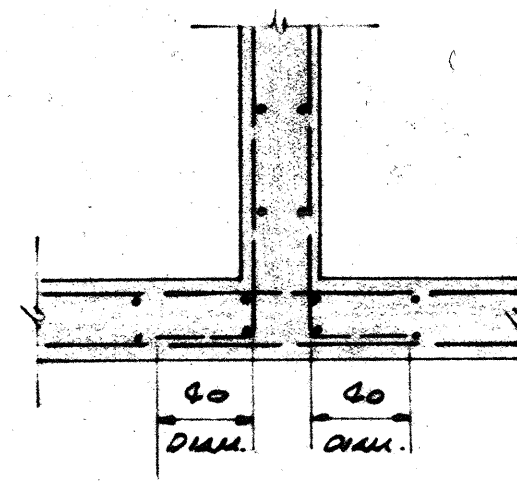


INTERSECTION

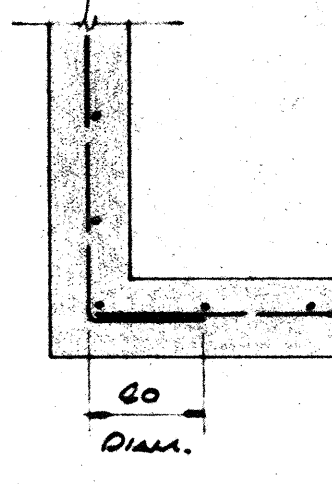


CORNER

SINGLE MAT

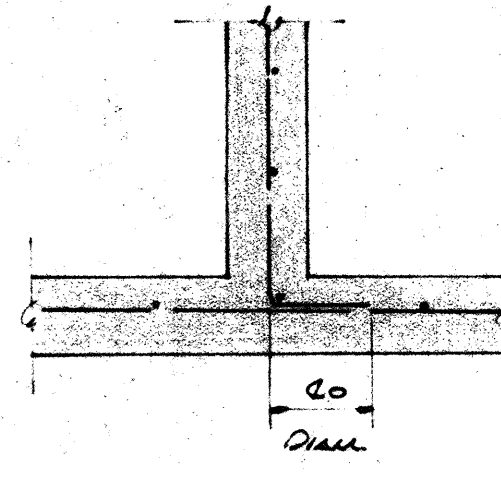


INTERSECTION

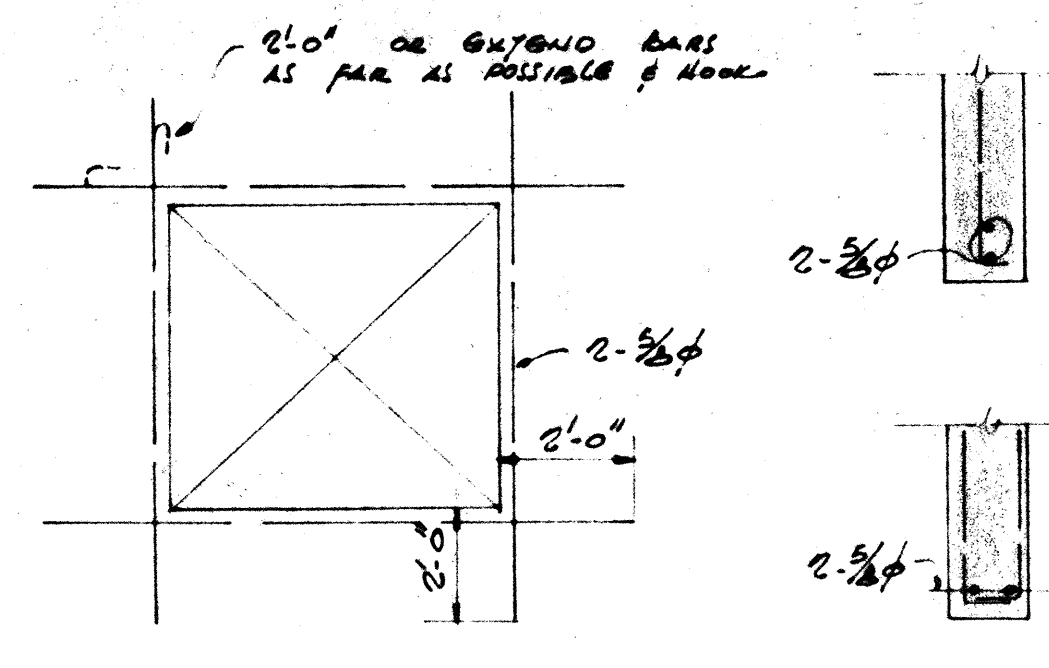


ELEVATION

JAMB, SILL
OR HEAD


TYPICAL REINFORCING DETAILS - WALLS AND FOOTINGS
BRICK OR CONCRETE

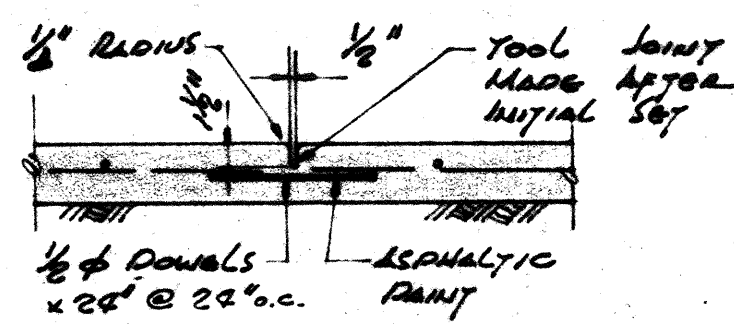


CONTRACTION
JOINT

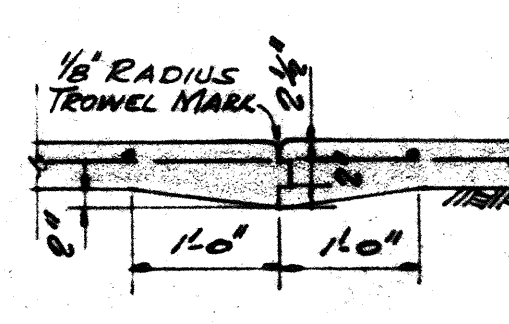


POUR JOINT

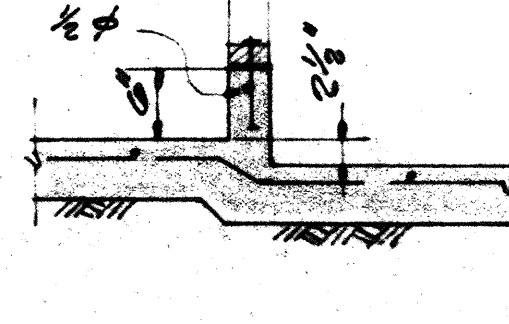

DEPRESSED SLAB

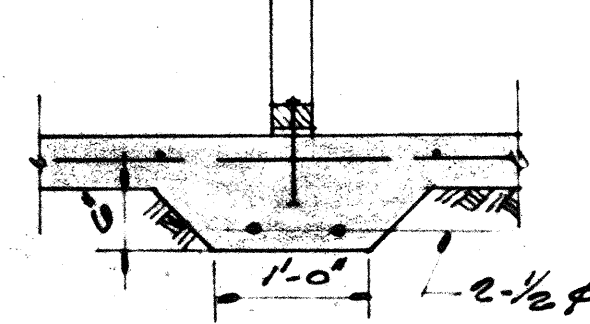


NON-BEARING
PARTITION FOOTING

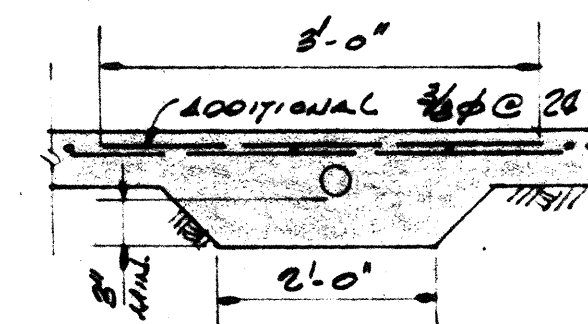


EMBEDDED PIPE

DETAILS OF SLAB ON GROUND


SLAB REINFORCING TO BE 1/2" @ 22" E.W. PLACED 2" FROM
GRADE BOTTOM OF SLAB. STOP BARS AT ALL JOINTS.
ALL SLABS ON GROUND WITHIN BUILDING TO BE PLACED ON 2" MIN. SAND

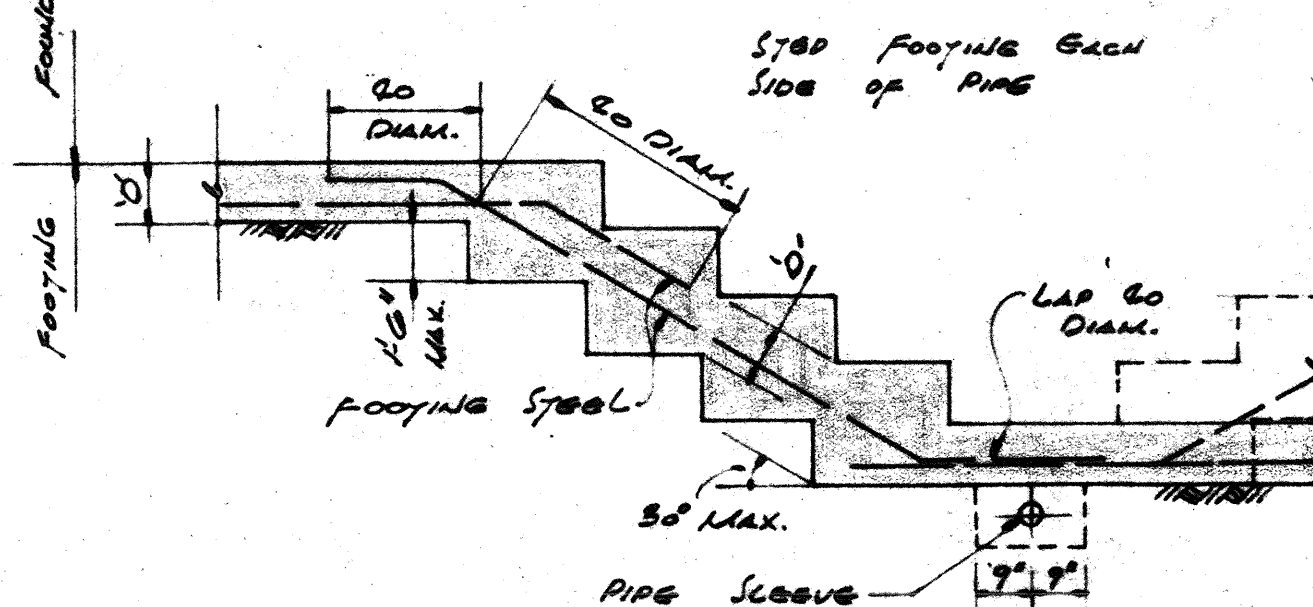


STEPPED FOOTING

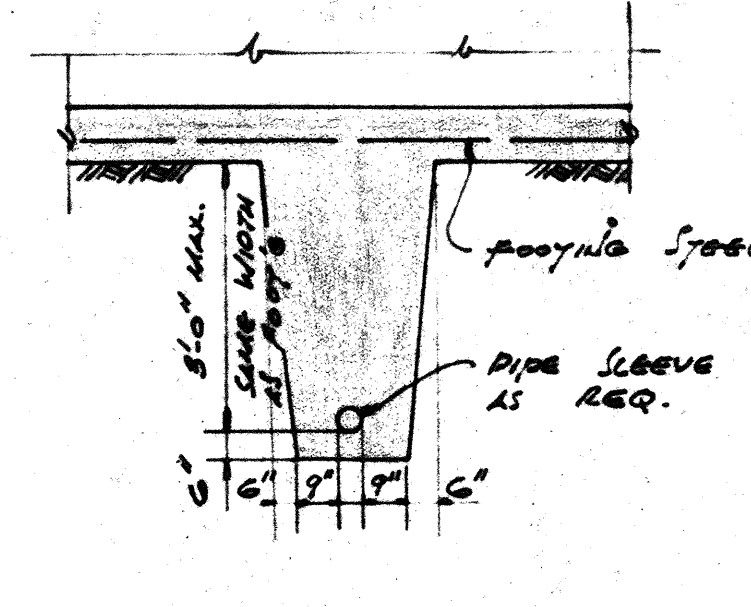


PIPE CROSSING

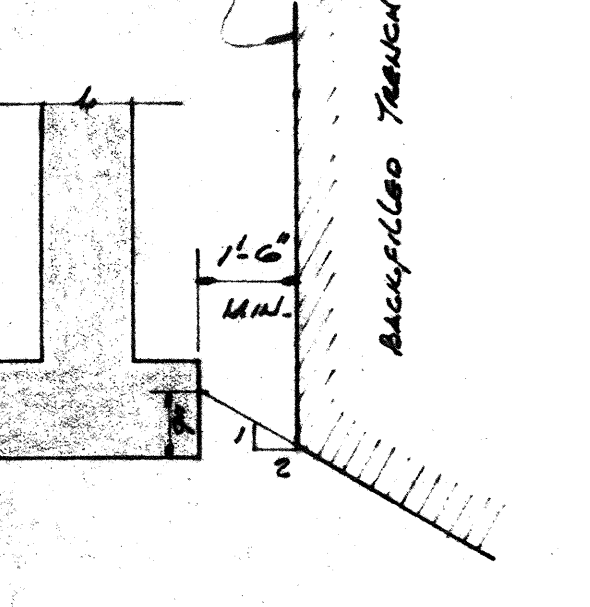

PIPES PARALLEL
TO WALL FOOTING

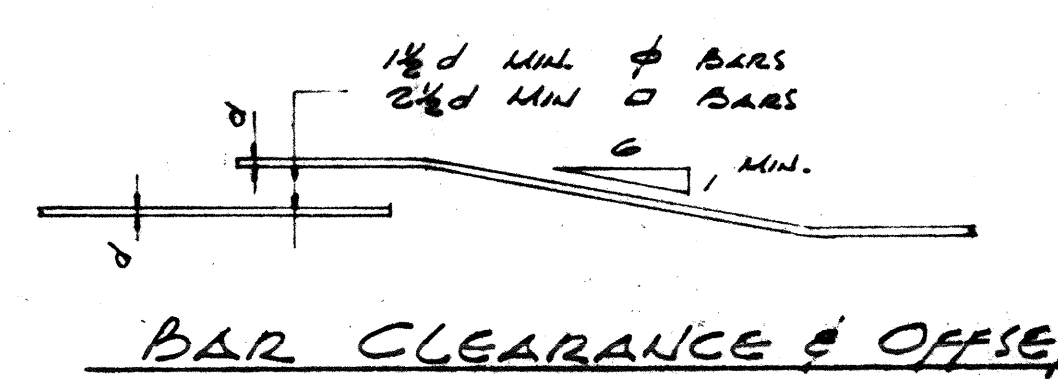


BAR CLEARANCE & OFFSET

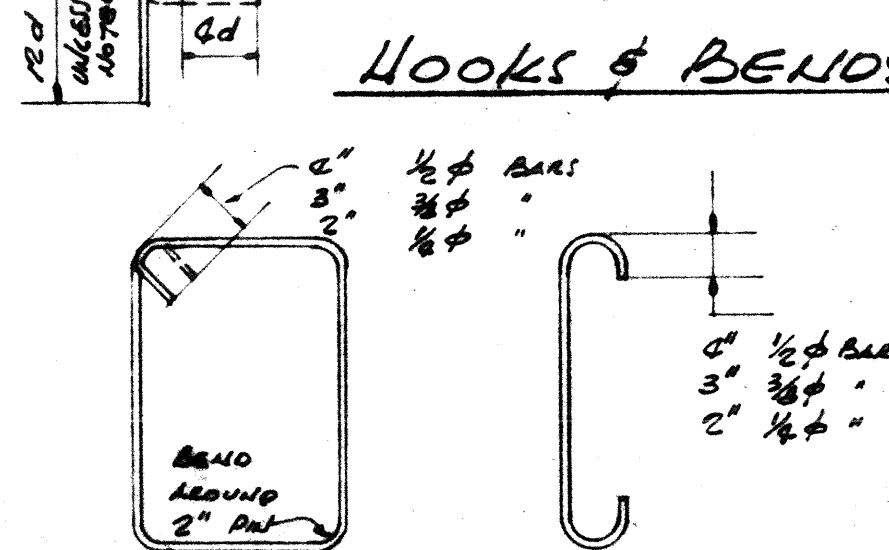


HOOKS & BENDS

TYPICAL BAR DETAILS

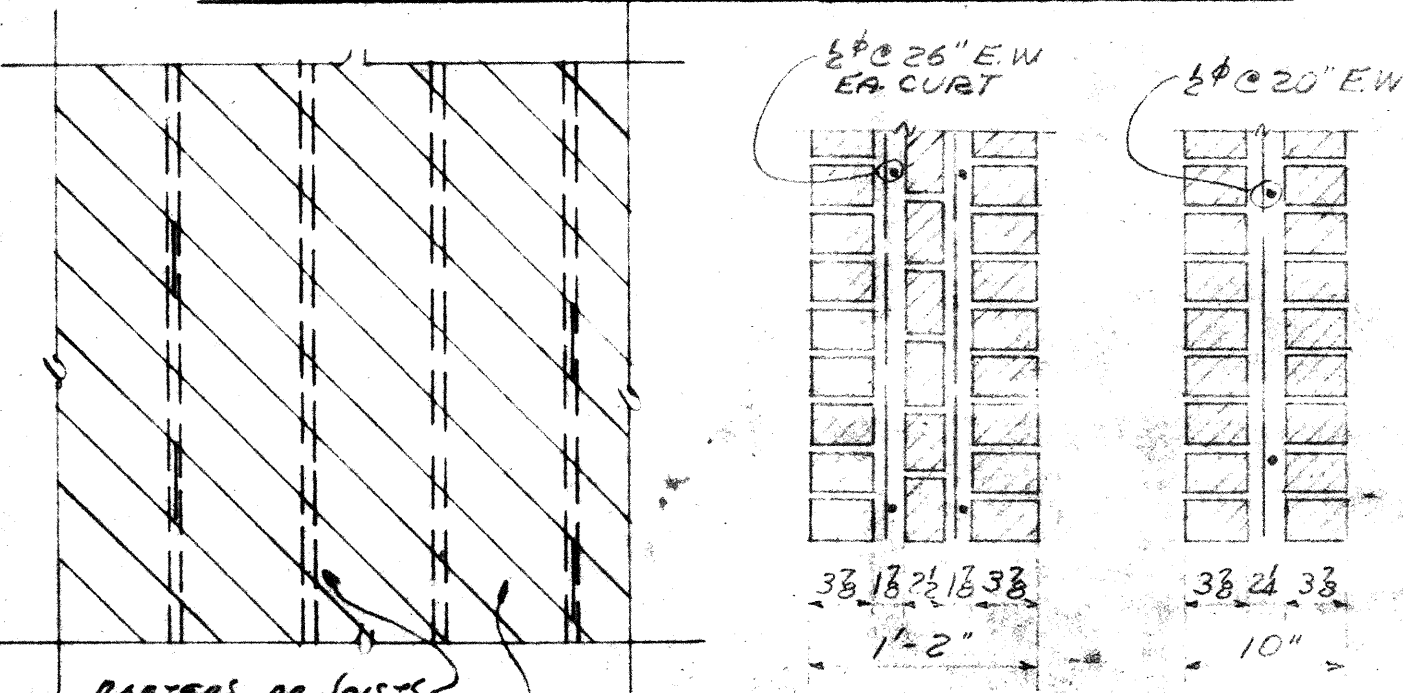

TYP BRICK WALLS

VERTICAL
CONSTRUCTION
DETAIL

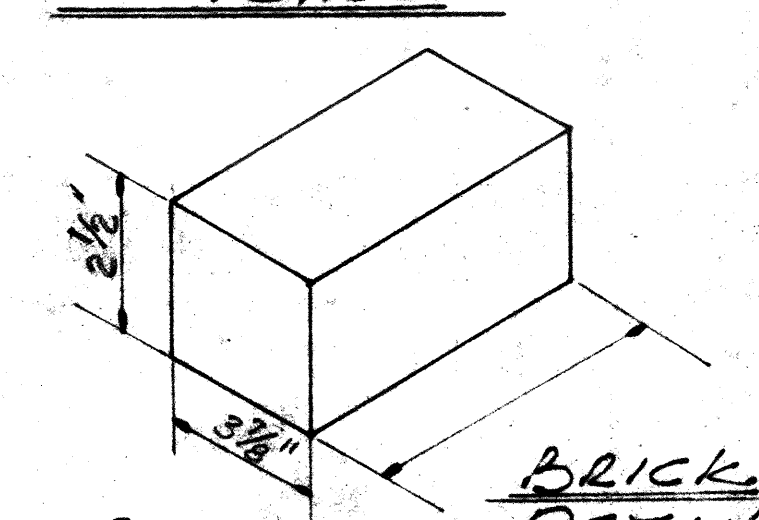

GENERAL NOTES

BUILDING DESIGNED TO COMPLY WITH UNIFORM BUILDING CODE 1929

DESIGNED LOADING
DEAD LOAD PLUS THE FOLLOWING LIVE LOADS.
ROOF LOAD 12 R.S.F.
FLOOR LOAD 50
STAIRS 100
WIND 15
SEISMIC 133 D.L.

FOUNDATION
SOIL TYPE COARSE SAND & GRAVEL
SOIL PRESSURE 4000 R.S.F.
FOOTINGS SHALL BEAR ON FIRM NATURAL UNDISTURBED SOIL.

CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS -- 2000 P.S.I.

ALL EXPOSED ROSES TO HAVE 3/4" CHAMFER UNLESS OTHERWISE DETAILED.
REINFORCING STEEL TO BE INTERLOCKED GRATE DEFORMED BARS AS PER ASTM A305
WALL STEEL SHALL LAP 30 DIAM. AT SPICES. STAGGER HORIZONTALLY. COLUMN
STEEL SHALL LAP 30 DIAM. AT SPICES. REINFORCING STEEL, ANCHOR BOLTS AND
OTHER METALS SHALL BE POSITIVELY SECURED IN PLACE BEFORE CONCRETE IS POURED.
REINFORCING STEEL SHALL HAVE THE FOLLOWING MINIMUM COVERAGE:
3/4" --- POWERED AGAINST GRAIN
2" --- GASTH CONTACT FORMS USED
3/4" --- TOP AND BOTTOM OF SLAB
1 1/2" --- BEAMS AND INTERIOR FACE OF WALLS
2" --- EXTERIOR FACE OF WALLS
2" --- COLUMNS
1" --- JOISTS

STRUCTURAL STEEL
CONNECTIONS
ALL CONNECTIONS TO BE SERIES 18 OR EQUAL UNLESS OTHERWISE NOTED.
RIVETS MAY BE SUBSTITUTED WITH THE SAME SIZE DRILLED BOLTS.
BOLTS AND RIVETS
RIVETS AND BOLTS NOT MARKED SHALL BE 3/4".
BOLTS CONNECTING COLUMN BASES SHALL HAVE UNTHREADED SHANKS EXTENDING COMPLETELY
THROUGH THE JOINTED PARTS.
DRILLED OR RIBBED BOLTS SHALL BE DRIVEN IN HOLES WITH 1/2" DIAMETER
LARGER THAN NOMINAL BOLT DIAMETER. RIVETS SHALL NOT EXTEND FULL THICKNESS
OF CONNECTING RS. AND/OR MEMBERS. WASHERS MAY OR MAY NOT BE USED. RIVETS
MUST BE THOROUGHLY TIGHTENED AND BE PROVIDED WITH AN APPROVED MECHANICAL
DEVICE THAT PREVENTS BACK SLIPPAGE.

HOLES
RIVET AND BOLT HOLES SHALL HAVE 1/2" CLEARANCE.
UNLESS HOLES SHALL NOT BE ENLARGED BY DRIFTING.
PIN HOLES FOR BRACING SHALL BE SUB-PUNCHED AND REAMED TO PIN SIZE PLUS 1/64" MAXIMUM

ERECTOR
THE STEEL FABRICATOR SHALL FURNISH ALL TEMPORARY GUYS AND BRACING REQUIRED
TO HOLD THE STEEL FRAME PLUMB UNTIL PERMANENT BRACING IS IN PLACE.
BRACING ROSS SHALL BE GIVEN AN INITIAL TENSION OF 2000 P.S.I.
FABRICATION AND ERECTION SHALL COMPLY WITH A.I.S.C.

COMPRESSION MEMBERS
PIPE COLUMN ENDS SHALL BE SAW CUT OR MILLED.
NO COMPRESSION MEMBER SHALL VARY FROM ITS INTEND LINE BY AN AMOUNT GREATER
THAN ONE ONE-HUNDREDTH OF ITS LENGTH.


PLATES
BASE PLATES AND HEAD PLATES SHALL BE ATTACHED WITH NO GREATER VARIATION
THAN ALLOWED FOR COMPRESSION MEMBERS.

WOOD
ALL RAFTERS, JOISTS, BEAMS & GIRDERS 3 1/2" WIDE OR MORE SHALL BE 1900 F. ALL OTHER
JOISTS AND RAFTERS SHALL BE 1800 F. ALL POST AND COMPRESSION MEMBERS SHALL
BE 1100 C. SILL ON CONCRETE SHALL BE FOUNDATION GRADE REDWOOD 3" THICK AND
ANCHORED WITH 3/4" BOLTS AT 24" ON CENTERS AND 9" FROM ENDS OF EACH PIECE OF SILL.
SILL SHALL BE EMBEDDED ON 3/4" DEEP BACK. SOLID BLOCKING 2" THICK. SHALL BE FITTED
BETWEEN JOISTS OVER SUPPORT. BOLT HOLES IN WOOD SHALL BE THE SAME NOMINAL
DIAMETER AS THE BOLT. PROVIDE SQUARE PLATE WASHERS UNDER HEADS AND NUTS
BEARING ON WOOD; CUT WASHERS WHERE BEARING ON STEEL. ALL NUTS SHALL BE TIGHTENED
WHEN PLACED AND RETIGHTENED AT COMPLETION OF THE JOB OR IMMEDIATELY
BEFORE CLOSING WITH FINISH CONSTRUCTION. ALL STRUCTURAL
1/2" BOLT DIAMETER --- 2-2 1/4" STEEL PLATE WASHER
3/4" --- 2 1/2" x 2 1/2" x 1/2"
3/4" --- 3 x 3 x 1/2"


NAILING SCHEDULE

JOISTS OR RAFTERS
TO BEARING --- 2-10" FOR NAILS EA. SIDE
AT LAPS (2" MINIMUM) --- 2-16d
BLOCKING
TO JOISTS AND RAFTERS --- 2-10d FOR NAILS EA. SIDE EA. END
TO BEARINGS --- 2-10d FOR NAILS EA. SIDE
CROSS BRACING TO JOISTS
OR RAFTERS --- 2-8d FOR NAILS EA. END
SHEATHING TO BEARING
1" --- 2-8d (3-8d EA. END)
1 1/2" --- 3-8d
2" --- 2-12d (3-16d EA. END)
STUDS TO BEARING --- 2-10d FOR NAILS EA. SIDE
DOUBLE TOP PLATES
LOWER PLATE TO STUD --- 2-20d
UPPER PLATE TO LOWER --- 12" @ 12" STAGGERED
LAP & INTERSECTIONS --- 3-16d
RIBBON TO STUDS
1" DIAGONAL --- 2-8d
2" DIAGONAL --- 2-16d
HERRINGBONE BRIDGING TO STUDS --- 2-10d FOR NAILS EA. SIDE


NOTE: FOR MASONRY NOTES SEE INT. SS

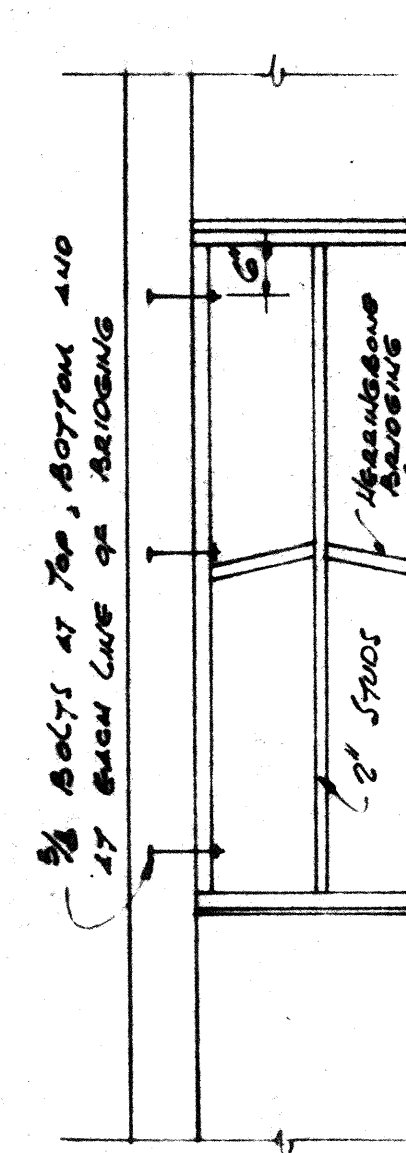


STUD WALL
CONNECTION
TO CONCRETE
OR MASONRY

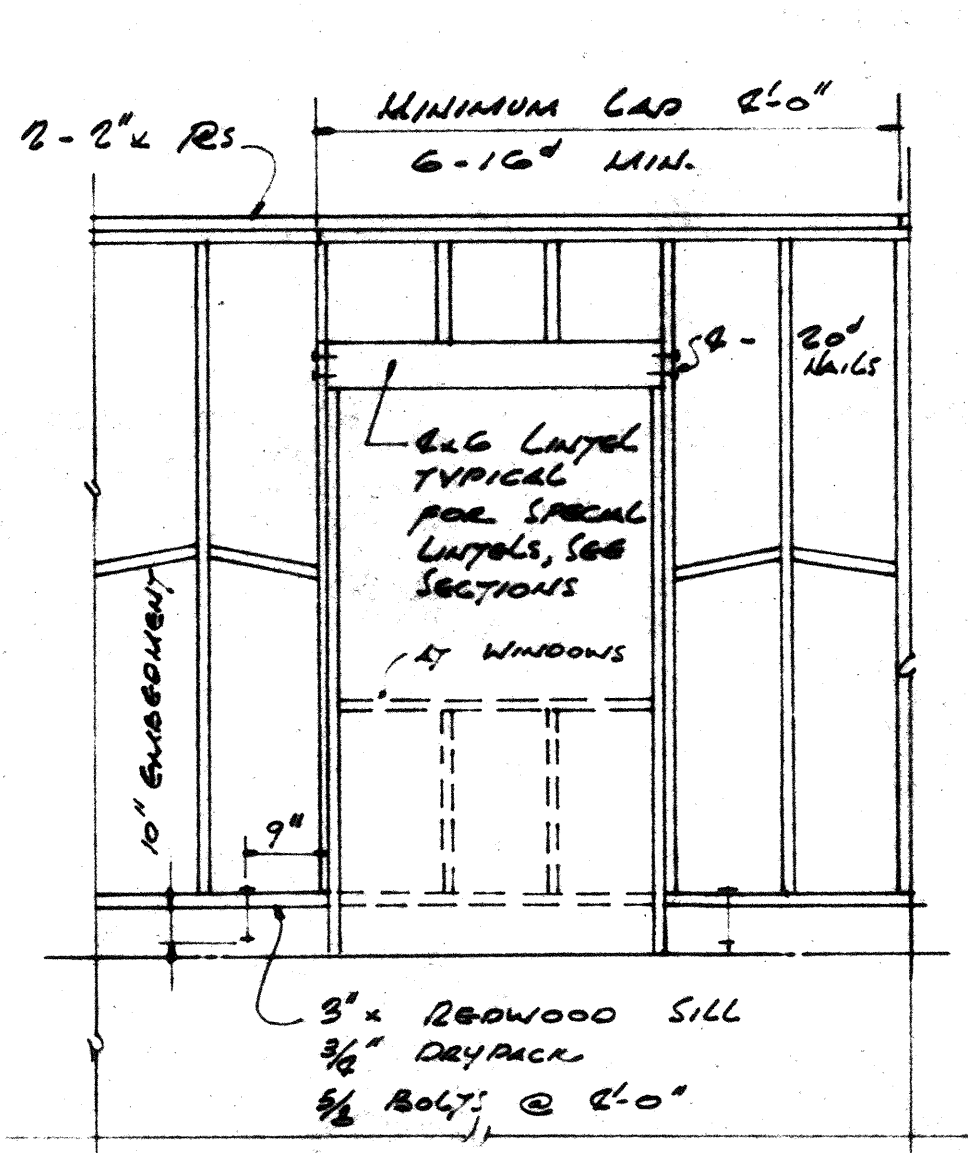

STUD WALL FRAMING

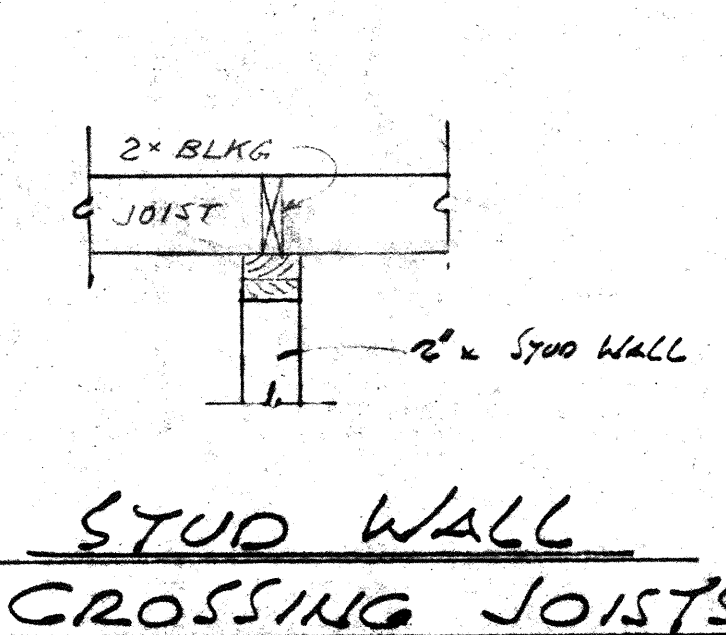

STUD WALL
CROSSING JOISTS

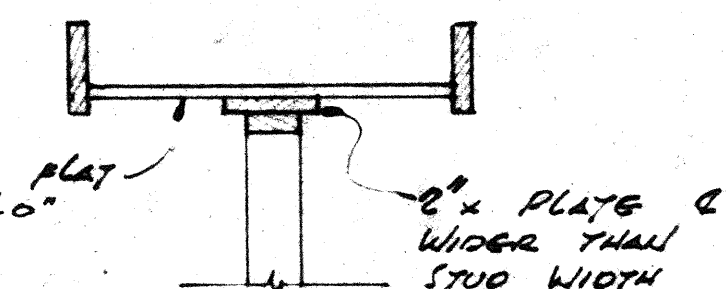

STUD WALL
PARALLEL TO JOISTS

Remarks

Revisions

Engineers

Approval

ERNEST H. LEE
STRUCTURAL ENGINEER
Ernest H. Lee
19122

DRAWN
ARCHITECT - LICENSE #
CHECKED
RCA

AUSTIN FIELD & FRY
architects
2311 WEST THIRD STREET • LOS ANGELES 5, CALIFORNIA • DUNKIRK 8-1326

STANDARD DETAILS
ST. EDMUNDS EPISCOPAL CHURCH
SAN MARINO, CALIF

DATE: AUG-51
CONTRACT: 1061
SHEET NUMBER: 51