



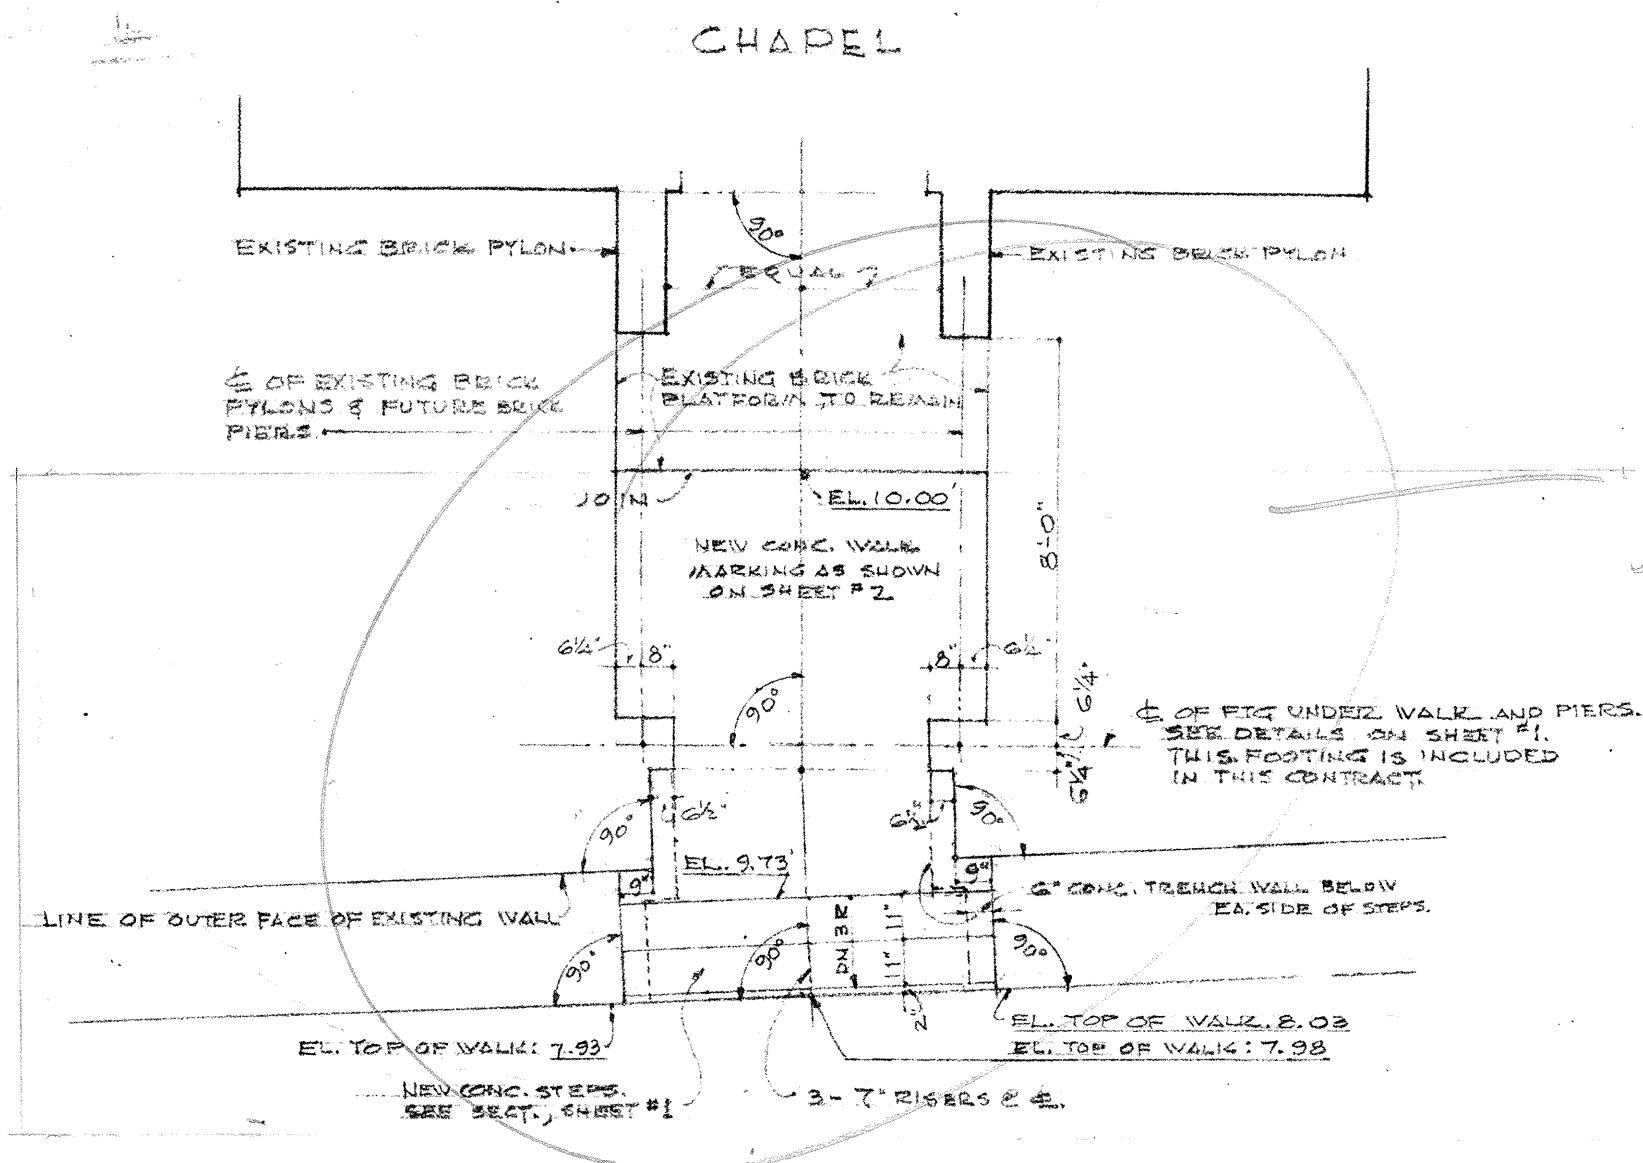

*Footings
only*

PLAN OF WORK IN THIS CONTRACT.
SCALE: 1/4" = 1'-0"

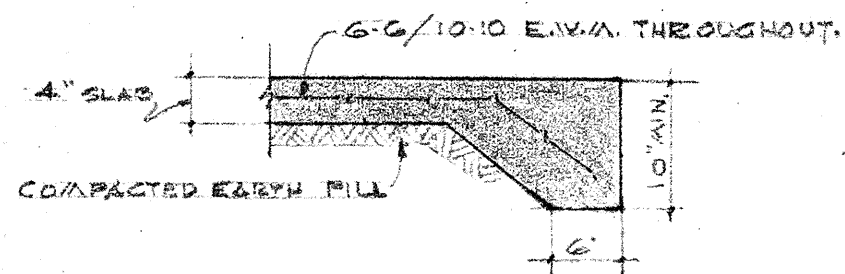

SECT. THRU NORTH & SOUTH
EDGES OF WALK.
SCALE: 3/4" = 1'-0"

NOTES:

- 1) TRENCH WALL IS TO EXTEND 10" MIN. BELOW NATURAL GRADE.
DOWEL INTO SLAB & STEPS WITH #3 BARS, 15" INTO WALL & 15" INTO SLAB, @ 16" O.C.
- 2) FUTURE BRICK WALL WILL BE 7 1/2" THICK INSTEAD OF 5 1/2" SHOWN ON SHEETS 1 & 2, AS LATTER BRICK SIZE IS NOT AVAILABLE.
- 3) SET BOLTS IN CON. FOOTING TO DIMENSIONS SHOWN IN DETAILS ON SHEET NO. 1. GREASE EXPOSED ENDS AND COVER WITH 6" X 6" X 1/2" REDWOOD BLOCK WITH HOLES DRILLED JUST DEEP ENOUGH TO RECEIVE BOLT ENDS.
- 4) FOLLOW APPLICABLE NOTES UNDER "GENERAL NOTES", SHEET NO. 1.
- 5) COMPACT SOIL THOROUGHLY UNDER STEPS & SLAB.
- 6) AFTER STAKING OUT WORK, CHECK WITH ARCHITECT BEFORE PROCEEDING.

SUPPLEMENTARY SHEET SHOWING
WORK INCLUDED IN THIS CONTRACT.

REVISIONS	NEW SITE DEVELOPMENT & CHAPEL ENTRY FOR ST. EDmund's EPISCOPAL CHURCH 1175 SAN GABRIEL BLVD., SAN MARINO, CALIF.		
	DRAWN BY O.F.S.	BREO FREEMAN	JOB NO. 923
	TRACED BY	ARCHITECT	SHEET NO. 3
	DATE 6-4-65	45 SOUTH MARENGO PASADENA 1, CALIFORNIA	