

BEAM SUPPORTED BY ROD HANGERS

UNIFORM LOAD

$$DL = 2-2 \times 6 + 3/4 \text{ PLYWD SP.} = 5.0 \text{ \#'} \quad \#1$$

$$FL - \text{SHTG} - 3/4 \text{ PLWD} - 1.5 \times 2.0 = 3.0 \text{ \#'} \quad \#0$$

$$\text{STRUCT RAIL} - 2 \times 6 = 2.0$$

$$\text{ARCH FINISH} - 1.3 + 4' \times 6.0 = 6.0 \text{ \#'} \quad \#1$$

$$DL = 16.0 \text{ \#'} \quad \#1$$

$$LL = 1.5 \times 40 \text{ \#'} \quad \#1$$


$$= 60.0$$

$$TL = 76.0 \text{ \#'} \quad \#1$$

ALTERNAT $LL = 300 \text{ \#}$ CONCENTRATED LOAD
AT ANY GOVERNING
LOCATION

$P_{92} = \text{SPEAKERS} - \text{TWO LOCATIONS}$

$$WGT = 92 \text{ \#}$$

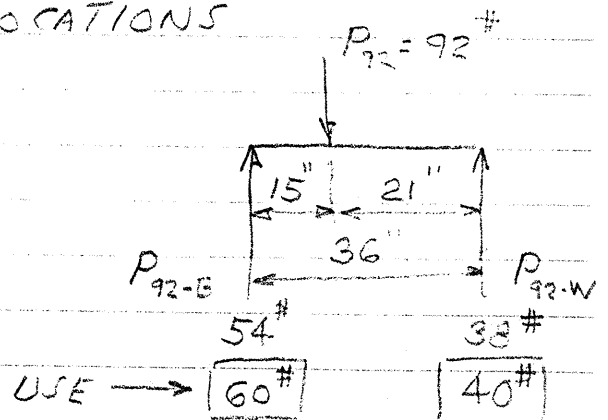

$P_{38} = \text{SPEAKERS} - \text{SIX LOCATIONS}$

$$WGT = 38 \text{ \#}$$

