



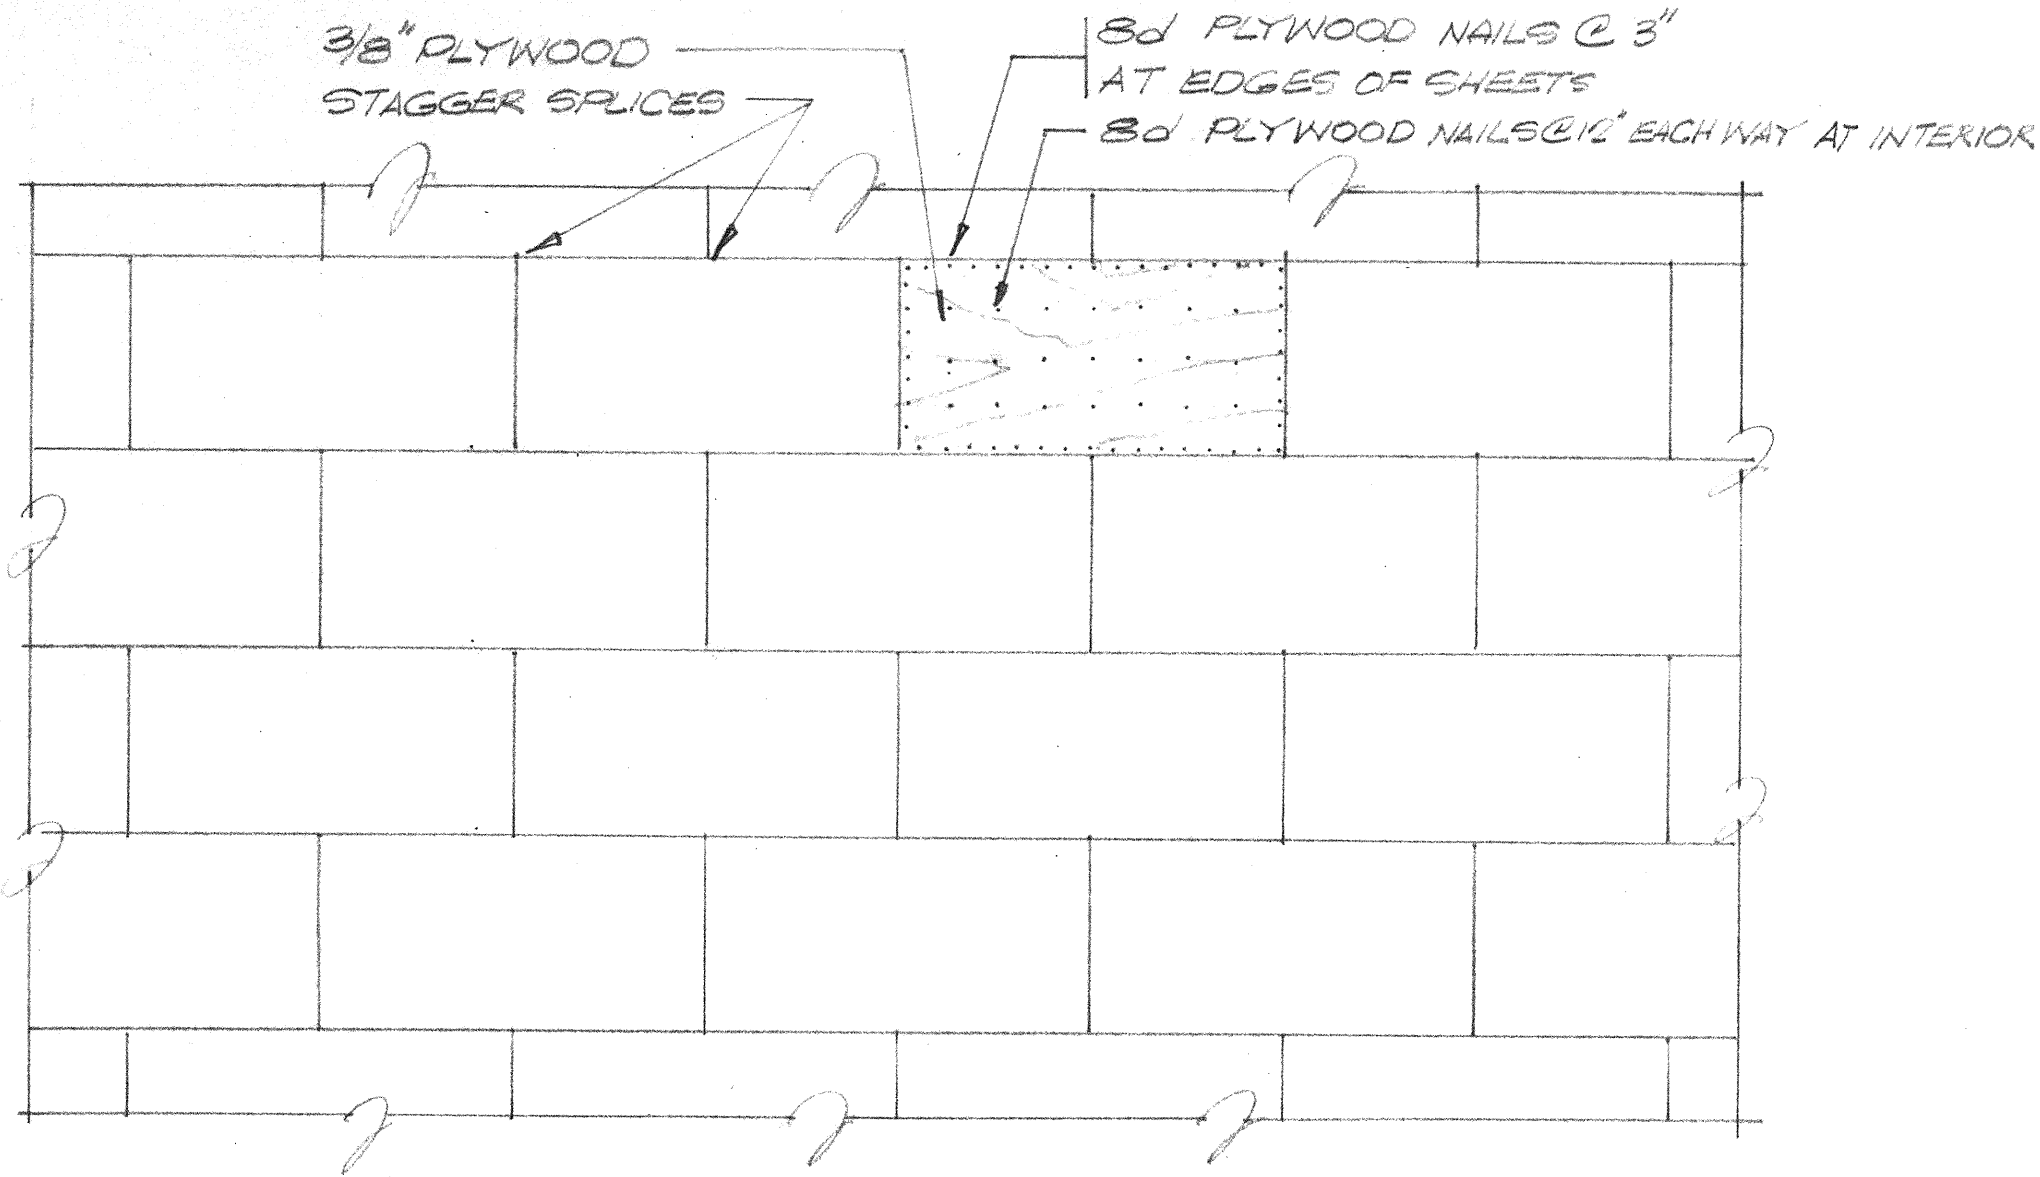

NOTE
LAY PLYWOOD OVER EXISTING
1" STRAIGHT SHEATHING

ROOF PLYWOOD SHEATHING DETAIL

1/4" 1

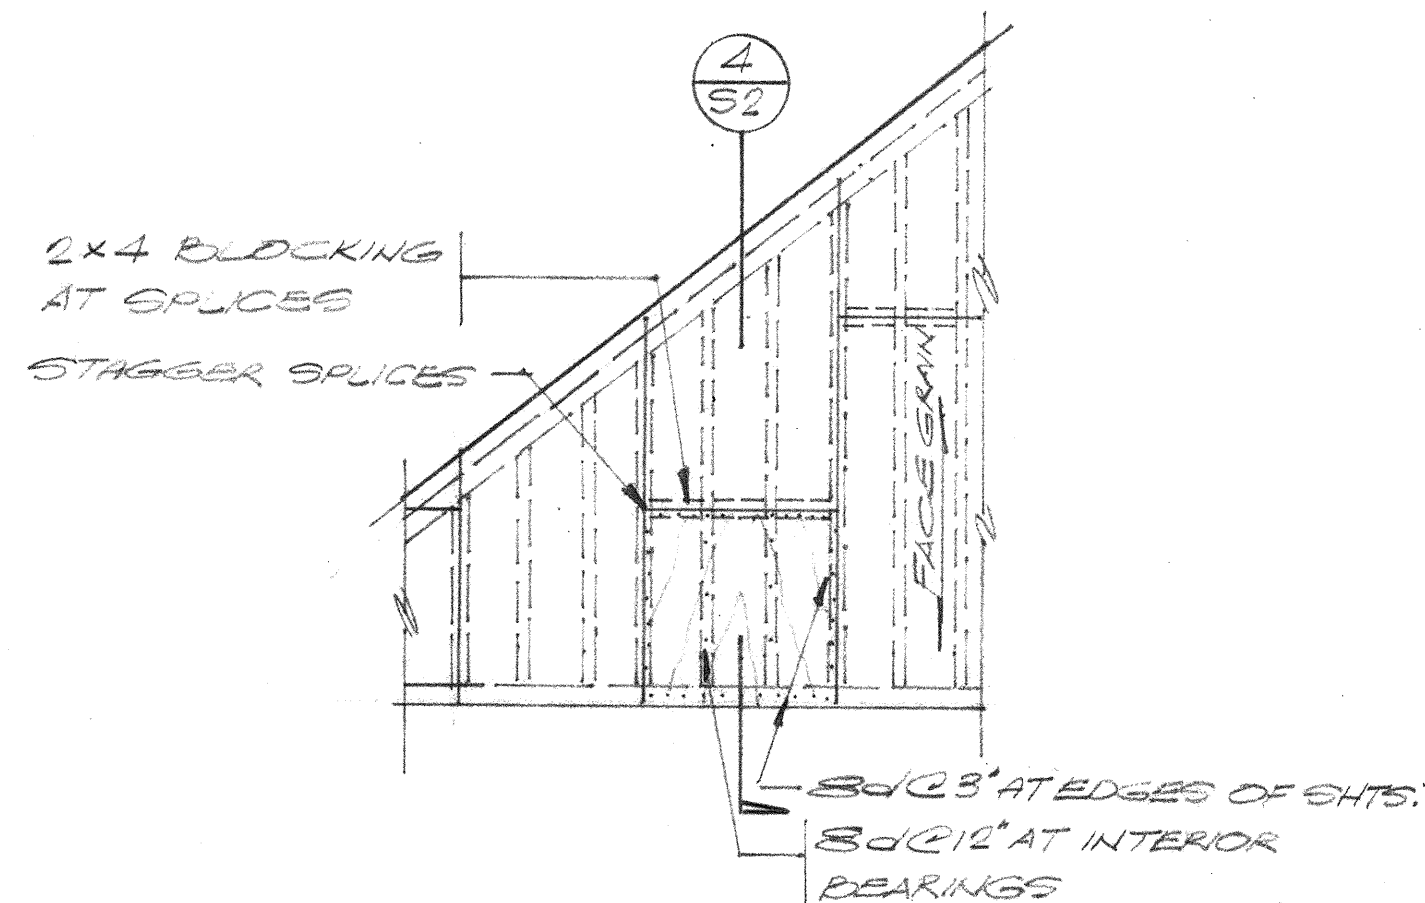

ATTIC SHEAR WALL PLYWOOD SHEATHING DETAIL

1/4" 2

GENERAL NOTES

GENERAL NOTES

GENERAL

- All work shall comply with the 1988 Edition of the Uniform Building Code and all other code requirements of all other local or state agencies having jurisdiction over this project.
- All drawings are considered to be a part of the Contract Documents. The Contractor shall be responsible for the review and coordination of all drawings prior to the start of construction. Any discrepancies that occur shall be brought to the attention of the Architect prior to start of construction so that a clarification can be issued.
- DO NOT SCALE DRAWINGS! All dimensions and the site conditions shall be verified by the Contractor at the job site prior to bid submittal, start of construction, and/or fabrication of materials. If discrepancies are encountered, the Architect shall be notified for clarification.
- Typical details shall apply in general construction unless specifically detailed. Where no details are given, construction shall be as shown for similar work.
- The Contract Documents and Specifications represent the finished structure. They do not indicate the method of construction. The Contractor shall provide all measures necessary to protect the structure and safety of workmen during construction. Such measures shall include but not be limited to, bracing, shoring for loads due to construction equipment, etc. Observation visits to the site by the Architect shall not include inspection of the above items and does not in any way relieve the Contractor of his responsibilities for the above.
- In general, the work consists of, but is not limited to, the following:
 1. Removal and disposal of the existing asbestos shingles on the roof.
 2. Removing finishes, electrical conduits, ducts, sheathing, etc., as required to install the wall anchors.
 3. Furnish and install the wall anchors, blocking strips, braces, etc., as shown on the drawings.
 4. Installation of plywood roof sheathing and attic shear wall as shown on the drawings.
 5. Repair and replacement of all items noted in No. 2 above.
 6. Furnish and install new roofing.

STRUCTURAL STEEL

- Structural steel shall conform to ASTM A-36 specifications and to the AISC specifications for fabrication and erection.

LUMBER

- Wood shall be grade marked Douglas Fir or Larch as follows:

Horizontal Framing	No. 1
Studs, Sills & Blocking	No. 2
Posts & Columns	No. 1
- Plywood sheathing shall be:

Douglas Fir Plywood Structural I, conforming to PS-1-74.
Plywood shall be grade marked "DFPA Structural I, Interior w/Exterior Glue" at roof and shear walls.
- All nailing shall conform to Table 25 Q of the Uniform Building Code, 1985 Edition, except plywood and specifically detailed connections to use common nails.
- Framing hardware shall be as manufactured by the Simpson Strong Tie or approved equal. Nails to be furnished by the manufacturer. Fasteners, such as bolts and nails shall be placed in each hole provided in the hardware. - Holes for bolts shall be drilled not more than 1/16" larger than the bolt diameter. Bolts shall be hexagonal heads, Grade A, conforming to ASTM A307.
- All wood in contact with concrete or masonry within 12" of exposed ground shall be pressure treated Douglas Fir.
- Plywood to be nailed by driving so that surface of plywood to be flush with top or bottom of head of nail. Nails not driven in far enough shall be redriven and nails overdriven shall be replaced. All shiners to be removed.
- Operators of machine nailing shall be qualified by nailing a representative sample prior to nailing job. Operators are not to be changed unless new operators are prequalified.

EXPANSION TYPE ANCHOR BOLTS

- All concrete anchors shall be Phillips Red Head Wedge Anchor, Catalog #WW 5884, ICBO No. 1372, or approved equal by Structural Engineer.
- 50% of the anchor bolts shall be proof tested (alternate bolts in any group arrangement) in tension or torque as follows:

Direct Tension = 1600#
Torque Wrench Torque = 150#
- All expansion anchors to be installed by inserting Injection Gel by Sika in accordance with the manufacturer's instructions in the hole prior to installing the anchors.

REVISIONS BY
6-4-90 HA



TAYLOR & GAINES
STRUCTURAL ENGINEERS
550 NORTH ROSEMEAD BOULEVARD
PASADENA, CALIFORNIA 91107-2192
(818) 351-8881

SEISMIC UPGRADING OF THE
ST. EDMUND'S EPISCOPAL CHURCH
(TWO - STOREY CLASSROOMS)
SAN MARINO, CA. 91108

GENERAL NOTES &
TYP. DETAILS

DATE 4-25-90

SCALE NOTED

DRAWN WCT

JOB

SHEET

1

OF 2 SHEETS