

GENERAL NOTES

1. FOR THE CONSTRUCTION OF THIS PROJECT DESCRIBED HERE AND IN THE FOLLOWING SHEETS, THE CONTRACTOR SHALL PROVIDE ALL MATERIAL, LABOR AND SUPERVISION TO SECURE UNIFORM QUALITY IN WORKMANSHIP THROUGHOUT.
2. CONTRACTOR IS ENCOURAGED TO PROPOSE AMENDMENTS IF IT WILL RESULT IN LOWER COST, IMPROVEMENTS OR SHORTEN COMPLETION DATE. HOWEVER, HE SHALL OBTAIN APPROVAL FROM PROJECT MANAGER PRIOR TO EXECUTING ANY MODIFICATION OR GENERAL DEVIATION FROM DRAWINGS.
3. ALL MATERIALS USED AND WORKMANSHIP PERFORMED BY BOTH GENERAL AND SUBCONTRACTORS SHALL CONFORM WITH PRESENT LAWS, REGULATIONS, ORDINANCES AND ADOPTED CODES OF THE CITY OF LOS ANGELES.
4. ALL WORK SHALL PERFORMED BY SKILLED MECHANICS AND ALL WORK SHALL BE PROPERLY INSTALLED LEVEL, PLUMB AND TRUE.
5. CONTRACTOR SHALL ASSUME RESPONSIBILITY FOR THE WORK OF HIS SUBCONTRACTORS AND SHALL COORDINATE ALL ACTIVITIES OF ALL TRADES ENGAGED IN THE CONSTRUCTION.
6. DETAILS NOT EXPLICITLY SHOWN ON THE DRAWINGS SHALL BE EXECUTED IN ACCORDANCE WITH STANDARD CONSTRUCTION PRACTICE AND WORKMANSHIP.
7. ALL CONTRACTORS SHALL VERIFY ALL DIMENSIONS AND CONDITION BEFORE COMMENCING WITH BIDS AND SUBSEQUENT WORK. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL METHODS, PROCEDURES, EXISTING CONDITION AND SAFETY ON PROJECT. IF FIELD CONDITIONS NECESSITATE ANY CHANGES OR MODIFICATIONS, THEN WRITTEN APPROVAL MUST BE OBTAINED FROM PROJECT MANAGER PRIOR TO START OF SAID CHANGES.
8. CONTRACTOR SHALL CARRY LIABILITY INSURANCE AND AGREES TO HOLD THE OWNER AND PALAZZOLO & ASSOCIATES HARMLESS OF ALL LAWSUITS ARISING FROM HIS ACTIVITIES DURING THE PERIOD OF DEMOLITION AND CONSTRUCTION. CONTRACTOR ALSO AGREES TO HOLD THE OWNER AND PALAZZOLO & ASSOCIATES HARMLESS OF ALL LAWSUITS AFTER CONSTRUCTION HAS BEEN COMPLETED FROM ANY DEFECTS THAT MAY EXIST IN THE TECHNICAL WORKMANSHIP.
9. ALL DAMAGE TO EXISTING STRUCTURE INCURRED DURING CONSTRUCTION SHALL BE REPAIRED OR REPLACED BY CONTRACTOR.
10. THE CONTRACTOR AND/OR SUBCONTRACTORS AWARDED THE CONSTRUCTION OF THIS PROJECT OR PHASES OF THIS PROJECT SHALL SUBMIT FOR APPROVAL ALL REQUIRED SAMPLES, REPORTS, LITERATURE, MATERIAL LISTS, SHOP DRAWINGS, ETC., AS SPECIFIED IN THE SPECIFICATIONS TO PROJECT MANAGER BEFORE FABRICATION, INSTALLATION, AND/OR CONSTRUCTION OF ANY WORK.
11. GENERAL CONTRACTOR AWARDED THE CONSTRUCTION OF THIS PROJECT SHALL BE HELD RESPONSIBLE FOR DISTRIBUTION OF ALL AND/OR PORTIONS OF ALL PERTINENT INFORMATION, CALCULATIONS, DRAWINGS AND SPECIFICATIONS REQUIRED FOR SUBCONTRACTORS AND THEIR PHASES OF CONSTRUCTION.
12. THE GENERAL CONTRACTOR SHALL ALSO BE HELD RESPONSIBLE FOR COLLECTIONS, TRANSMITTING AND SUBMITTING ITEMS TO PROJECT MANAGER FOR APPROVAL AS DESIGNATED IN THE SPECIFICATIONS PRIOR TO FABRICATION, INSTALLATION AND/OR CONSTRUCTION.
13. GENERAL CONTRACTOR SHALL SUBMIT A DETAILED CONSTRUCTION SCHEDULE INDICATING THE OVERLAPPING PHASES OF CONSTRUCTION INCLUDING ALL SUBCONTRACTED WORK AS WELL AS HIS OWN.
14. THE AWARDED GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROCUREMENT OF ALL LONG LEAD ITEMS SUCH AS EQUIPMENT, MATERIALS, AND SPECIFIED PRODUCTS SO AS TO MEET HIS CONSTRUCTION SCHEDULE. THE GENERAL CONTRACTOR SHALL MAKE INITIAL INVESTIGATION INTO THE AVAILABILITY OF ALL ITEMS AT BID AWARD, AND SHALL BE REPRESENTED IN HIS SUBMITTED CONSTRUCTION SCHEDULE.
15. THE GENERAL CONTRACTOR SHALL INCUR THE COST DIFFERENTIAL FOR SUBSTITUTIONS OF LONG LEAD ITEMS SUCH AS EQUIPMENT, MATERIALS, AND PROCURE THEM TO MEET HIS CONSTRUCTION SCHEDULE. THE GENERAL CONTRACTOR'S INITIAL INVESTIGATION IN PREPARING A CONSTRUCTION SCHEDULE SHOULD REFLECT THE NON-AVAILABILITY OF THESE ITEMS; AND NOTIFICATION SHALL BE MADE TO THE PROJECT MANAGER AT THAT TIME SO AS TO AVOID THIS SITUATION.
16. CONTRACTOR SHALL OBTAIN AND PAY FOR ALL BUILDING PERMITS, OWNER SHALL SUBMIT DRAWINGS TO THE CITY OF LOS ANGELES, BUILDING DEPARTMENT FOR PLAN CHECK AND BUILDING PERMIT.
17. THE CONTRACTOR SHALL NOT SCALE DRAWINGS, AND IF ADDITIONAL DIMENSIONS ARE REQUIRED THE CONTRACTOR SHALL CONTACT PROJECT MANAGER.

18. REMOVE AND DISPOSE OF ALL USED MATERIAL AND DEBRIS IN RECEPTACLE PROVIDED BY CONTRACTOR AND LEAVE THE PREMISES IN CLEAN AND SAFE CONDITION ON A DAILY BASIS.
19. CONTRACTOR SHALL BE RESPONSIBLE TO MAKE ARRANGEMENTS WITH OWNER FOR TEMPORARY SPACE REQUIREMENTS FOR STORING MATERIAL, DEBRIS, PARKING, OFFICE SPACE, ETC., INCLUDING WATER AND POWER SUPPLY, AND TOILET FACILITIES.
20. ALL SURPLUS AND USABLE MATERIALS AS INDICATED ON THE DRAWINGS SHALL BE STOCKPILED AND STORED AS PER OWNER'S INSTRUCTIONS.
21. CONTRACTOR SHALL PROVIDE ALL NECESSARY CUTTING REQUIRED FOR OPENINGS REQUESTED BY AIR CONDITIONING AND ELECTRICAL CONTRACTORS. EACH INDIVIDUAL CONTRACTOR SHALL BE RESPONSIBLE FOR THE SEALING OF PENETRATIONS.
22. CONTRACTOR SHALL PROVIDE STRUCTURAL SUPPORTS AS REQUIRED AT ALL WALL MOUNTED EQUIPMENT, CABINETS, PLUMBING AND LIGHT FIXTURE LOCATIONS.
- FIRE--LIFE--SAFETY NOTES:
1. STORAGE, DISPENSING OR USE OF ANY FLAMMABLE OR COMBUSTIBLE LIQUIDS, FLAMMABLE GAS AND HAZARDOUS CHEMICALS SHALL COMPLY WITH UNIFORM FIRE CODE REGULATIONS.
2. WHERE FACILITIES ARE SPRINKLERED. SHOP DRAWINGS SHALL BE PROVIDED TO THE CITY OF LOS ANGELES TO SHOW RELOCATED SPRINKLER HEADS WITHIN 30 DAYS OF PERMIT ISSUANCE.
3. EXTEND EXISTING FIRE--LIFE--SAFETY SYSTEMS, AS NECESSARY.
4. THE CONTRACTOR SHALL PROVIDE PORTABLE FIRE EXTINGUISHERS WITHIN 75 FOOT TRAVEL DISTANCE WITH A RATING OF 2A - 10 BC DURING CONSTRUCTION AS REQUIRED BY THE CITY OF LOS ANGELES FIRE MARSHAL.
5. CONTRACTOR SHALL PROVIDE AND INSTALL FIRE EXTINGUISHERS AS REQUIRED BY FIRE DEPARTMENT FIELD INSPECTOR.

INTERIOR FINISHES:

1. INTERIOR FINISHES AND FLAME--PROOFING SHALL COMPLY WITH TITLE 19 AND CHAPTER 8, C.B.C., 1998 EDITION.
- A. ENCLOSED VERTICAL EXIT--WAYS SHALL NOT EXCEED AN END POINT FLAME SPREAD RATING OF 25 (CLASS I).
- B. INTERIOR WALL AND CEILING FINISHES FOR EXIT CORRIDORS SHALL NOT EXCEED AN END POINT FLAME SPREAD RATING OF 75 (CLASS II).
- C. INTERIOR WALL AND CEILING FINISHES FOR INTERIOR AREAS SHALL NOT EXCEED AN END POINT FLAME RATING OF 200 (CLASS III).
- D. ANY DECORATIONS USED SHALL BE NON--COMBUSTIBLE OR FLAME--PROOFED IN AN APPROVED MANNER.
- E. THE ABOVE REQUIREMENTS SHALL NOT APPLY TO TRIM DEFINED AS PICTURE MOLDS, CHAIR RAILS, BASEBOARDS AND HANDRAILS; TO DOORS AND WINDOWS OR THEIR FRAMES, NOR TO MATERIALS THAT ARE LESS THAN 1/28 INCH THICK.

EXITS:

1. ALL EXITS SHALL HAVE EMERGENCY LIGHTING, PER SECTION 1003.2.8.5 C.B.C., 1998 EDITION WHICH PROVIDES FOR EXIT ILLUMINATION AT ANY TIME THE BUILDING IS OCCUPIED WITH LIGHT HAVING INTENSITY OF NOT LESS THAN ONE FOOT CANDLE AT FLOOR LEVEL.
2. PROVIDE EXIT SIGNS AT REQUIRED EXIT DOORWAYS AND WHERE OTHERWISE NECESSARY TO INDICATE THE DIRECTION OF EGRESS, PER SECTION 1003.2.8, C.B.C. 1998 EDITION.
3. EXIT SIGNS SHALL HAVE 6-INCH HIGH BLOCK LETTERS WITH A STROKE OF NOT LESS THAN 3/4 INCH 2" WIDTH, 3/8" SPACING IN HIGH CONTRAST WITH THEIR BACKGROUND, PER SECTION 1003.2.8.3, C.B.C., 1998 EDITION.
4. EXIT SIGNS ARE REQUIRED TO HAVE SEPARATE POWER SOURCE, EITHER FROM STORAGE BATTERIES OR AN ON--SITE GENERATOR. AND SHALL COMPLY WITH THE PROVISIONS OF SECTION 1003.2.9.2, AND 1003.2.8.4 C.B.C., 1998 EDITION.

ELECTRICAL NOTES:

1. ALL ELECTRICAL WORK SHALL BE DONE UNDER THE PRESENT LAWS, REGULATIONS, ORDINANCES, AND ADOPTED CODES OF THE CITY OF LOS ANGELES, INCLUDING THE N.E.C. 1996 EDITION AND THE PASADENA MUNICIPAL CODE.
2. ELECTRICAL CONTRACTOR SHALL PROVIDE NYLON PULL STRINGS IN ALL EMPTY CONDUITS.
3. THE CENTER OF 15, 20 AND 30 AMPERE RECEPTACLES SHALL BE INSTALLED NOT LESS THAN 18" ABOVE THE FLOOR. THE CENTER HEIGHT OF ALL SWITCHES SHALL BE 4'-0" MAXIMUM ABOVE THE FLOOR.
4. ALL SPECIAL LIGHTING TO HAVE UL APPROVAL.
5. ALL TELEPHONE CABLES IN PLENUM AREA MUST BE TEFLON.
6. PANELS AND TRANSFORMERS, IF REQUIRED, SHALL BE GENERAL ELECTRIC, OR EQUAL.
7. NO "BACK--TO--BACK" OUTLETS ARE PERMITTED WITHIN A WALL. OUTLETS MUST BE STAGGERED IN LOCATION. WHERE RECEPTACLES AND OUTLETS ARE SHOWN SIDE--BY--SIDE ON THE PLAN THEY SHALL BE PLACED THE MINIMUM DISTANCE APART.
8. CONTRACTOR TO PROVIDE 2" CONDUIT FROM TELPEPHONE BACKBOARD TO BUILDING TELEPHONE CLOSET.
9. CONTRACTOR TO PROVIDE A FIRE RATED PAINTED PLYWOOD TELEPHONE BACK BOARD. LOCATION T.B.D.
10. EACH RECEPTACLE SHOULD BE LABELED WITH DIAMOND LABEL TAPE TO IDENTIFY EACH CIRCUIT.

HVAC NOTES:

1. THE HVAC CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS, AND EQUIPMENT NECESSARY TO COMPLETE INSTALLATION, SERVICE THE AREA, AND MEET ALL BUILDING CODES, AS WELL AS OWNER'S REQUIREMENTS.
2. ALL ABANDONED AND VACANT DUCTS, SERVICE UTILITY CONDUITS AND MISCELLANEOUS EQUIPMENT SHALL BE COMPLETELY REMOVED, STORED OR DISPOSED OF PROPERLY.
3. THE MECHANICAL CONTRACTOR SHALL FURNISH AND INSTALL FIRE DAMPERS WHERE DUCTS PASS THROUGH FIRE--RATED PARTITIONS.

DOORS AND WNDOWS:

1. THE INSTALLATION OF GLASS PERTAINING TO DOOR AND WINDOWS SHALL CONFORM TO REQUIREMENTS OF FEDERAL SAFETY STANDARD 16 - FR - 1201. GLASS IN LOCATIONS SUBJECT TO HUMAN IMPACT SHALL MEET THE REQUIREMENT OF SECTION 2406.3, C.B.C. 1998 EDITION.
2. ALL LEGAL EXIT DOORS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF KEY, SPECIAL KNOWLEDGE OR EFFORT. SPECIAL LOCKING DEVICE SHALL BE OF APPROVED TYPE, SECTION 1003.1.8, C.B.C. 1998 EDITION.
3. ALL FINISH HARDWARE SHALL BE NEW AND FREE OF DEFECTS AND CAPABLE OF DOING THE WORK IT WAS INSTALLED FOR.
4. THE BOTTOM 10" OF ALL DOORS (EXCEPT SLIDING AND AUTOMATIC) SHALL HAVE A SMOOTH UNINTERRUPTED SURFACE.
5. ALL REQUIRED EXIT DOORWAYS SHALL HAVE A MINIMUM 34" CLEAR OPENING WITH THE DOOR AT 90 DEGREES TO THE CLOSED POSITION, SECTION 1003.3.1.3, C.B.C., 1998 EDITION.
6. ONE DOOR OF A PAIR OF DOORS SHALL MEET THE MINIMUM WIDTH REQUIREMENT.
7. MAXIMUM HEIGHT OF THRESHOLD TO BE 1/2". MAXIMUM VERTICAL CHANGE AT EDGE IS 1/4" WITH A MAXIMUM BEVEL OF 45 DEGREES.
8. MAXIMUM EFFORT TO OPERATE DOORS SHALL NOT EXCEED 8.5 POUNDS FOR EXTERIOR DOOR, 5 POUNDS FOR INTERIOR DOORS, AND 15 POUNDS FOR FIRE DOORS.
- A. HAND ACTIVATED DOOR OPENING HARDWARE TO BE MOUNTED 30" TO 44" ABOVE THE FLOOR AND BE OPERABLE WITH A SINGLE EFFORT BY LEVER TYPE HARDWARE.
- B. EXIT DOORS SHALL SWING IN THE DIRECTION OF EXIT TRAVEL WHEN SERVING ANY HAZARDOUS AREA OR WHEN SERVING AN OCCUPANT LOAD OF 50 OR MORE, PER SECTION 1003.3.1.5, C.B.C. 1998 EDITION.
9. DOORS SHALL BE FITTED AND CLEARANCES SHALL BE UNIFORM AT ALL EDGES. ALL WOOD DOORS SHALL BE UNDERCUT IN THE FIELD.
10. ALL FIRE RATED DOOR ASSEMBLIES SHALL HAVE A RATING LABEL SPECIFYING THE REQUIRED RATING, PER SEC. 1004.3.4.3.2.1 C.B.C. 1998 EDITION
11. ALL FIRE RATED DOOR ASSEMBLIES SHALL BE MAINTAINED SELF--CLOSING OR SHALL BE AUTOMATIC SELF--CLOSING BY ACTIVATION OF SMOKE DETECTOR (OR FIRE ALARM SYSTEM ACTIVATION) IN ACCORDANCE WITH SECTION 713 PER C.B.C. 1998 EDITION

SUSPENDED CEILING SYSTEM:

1. SUSPEND CEILING SYSTEMS. SUSPENDED CEILING FRAMING SYSTEMS SHALL BE DESIGNED TO RESIST A LATERAL FORCE OF 20 PERCENT OF THE WEIGHT OF THE CEILING ASSEMBLY AND ANY LOADS TRIBUTARY TO THE SYSTEM. FOR PURPOSES OF DETERMINING THE LATERAL FORCE, A MINIMUM CEILING WEIGHT OF 5 POUNDS PER SQUARE FOOT SHALL BE USED. WHERE THE CEILING LOADS DO NOT EXCEED 5 POUNDS PER SQUARE FOOT AND WHERE PARTITION ARE NOT CONNECTED TO THE CEILING SYSTEM, THE FOLLOWING BRACING METHOD MAY BE EMPLOYED:
- A. LATERAL SUPPORT MAY BE PROVIDED BY FOUR WIRES OF MINIMUM NO. 12 GAUGE SPLAYED IN FOUR DIRECTION 90 DEGREES APART, AND CONNECTED TO THE MAIN RUNNER WITHIN 2" OF THE CROSS RUNNER AND TO THE STRUCTURE ABOVE AT AN ANGLE NOT EXCEEDING 45 FROM THE PLACE OF THE CEILING. THESE LATERAL SUPPORT POINTS SHALL BE PLACED 12' O.C. IN EACH DIRECTION WITH THE FIRST POINT WITHIN 6' FROM EACH WALL.
- B. ALLOWANCE SHALL BE MADE FOR LATERAL MOVEMENT OF THE SYSTEM. MAIN RUNNERS AND CROSS RUNNERS MAY BE ATTACHED AT TWO ADJACENT WALLS WITH CLEARANCE BETWEEN THE WALL AND THE RUNNERS MAINTAINED AT THE OTHER TWO WALLS.
- C. VERTICAL SUPPORT SHALL BE PROVIDED AS REQUIRED IN CHAPTER 47 WITH THE ADDED REQUIREMENT THAT DISCONTINUOUS ENDS OF CROSS RUNNERS AND MAIN RUNNERS BE VERTICALLY SUPPORTED WITHIN 8" OF SUCH DISCONTINUITIES AS MAY OCCUR WHERE THE CEILING IS DISRUPTED BY A WALL.
- D. LIGHTING FIXTURES AND AIR DIFFUSERS SHALL BE SUPPORTED DIRECTLY BY WIRES TO THE STRUCTURE ABOVE.

EXCEPTION:

1. RECESSED LIGHTING FIXTURES NOT OVER 56 POUNDS IN WEIGHT AND SUSPENDED, OR PENDANT HUNG FIXTURES NOT OVER 20 POUNDS IN WEIGHT, MAY BE SUPPORTED AND ATTACHED DIRECTLY TO THE CEILING SYSTEM RUNNERS BY A POSITIVE ATTACHMENT SUCH AS SCREWS OR BOLTS.
2. AIR DIFFUSERS WHICH WEIGHT NOT MORE THAN 20 POUNDS, AND WHICH RECEIVE NO TRIBUTARY LOADING FROM DUCT WORK MAY BE POSITIVELY ATTACHED TO AND SUPPORTED BY THE CEILING RUNNERS.

MILLWORK NOTES:

1. ALL STANDARD WALL BACKING FOR CASEWORK, TOILET ACCESSORIES, WALL HANGING EQUIPMENT, ETC., SHALL BE 16 GA. GALVANIZED STEEL, 4" WIDE, COVERING 3 STUDS MINIMUM AND SCREWED TO METAL STUD.
2. CABINET DESIGN SHALL BE FLUSH OVERLY REVEAL CONSTRUCTION.
3. ALL SHELVES, SEMI--EXPOSED SURFACES, INCLUDING DRAWER INTERIORS, SHALL BE FINISHED WITH CABINET LINER OF UNIFORM COLOR THROUGHOUT.
4. ALL MILLWORK IS TO BE CONSTRUCTION INDEPENDENT WITH FULL BACK, BASE, TOP AND SIDES.
5. SHOP DRAWINGS ARE REQUIRED FOR DESIGNER AND OWNER'S REVIEW PRIOR TO FABRICATION.

BUILDING SUMMARY

CONSTRUCTION TYPE	TYPE V NR
CURRENT OCCUPANCY GROUP	GROUP F 1/B
PROPOSED OCCUPANCY GROUP	GROUP F1/B/M
GROUND FLOOR S.F.	XXX U.S.F.


FULLY SPRINKLERED FACILITY	YES	☒	NO	☐
HANDICAP PARKING AVAILABLE	YES	☒	NO	☐

SHEET INDEX

A.0	GENERAL NOTES
A.1	DEMOLITION PLAN/PARTITION PLAN
A.2	REFLECTED CEILING PLAN
A.3	POWER AND TELEPHONE PLAN
A.4	FINISH PLAN
A.5	ELEVATIONS & DETAILS


1 OVERALL FLOOR PLAN


SCALE: NONE

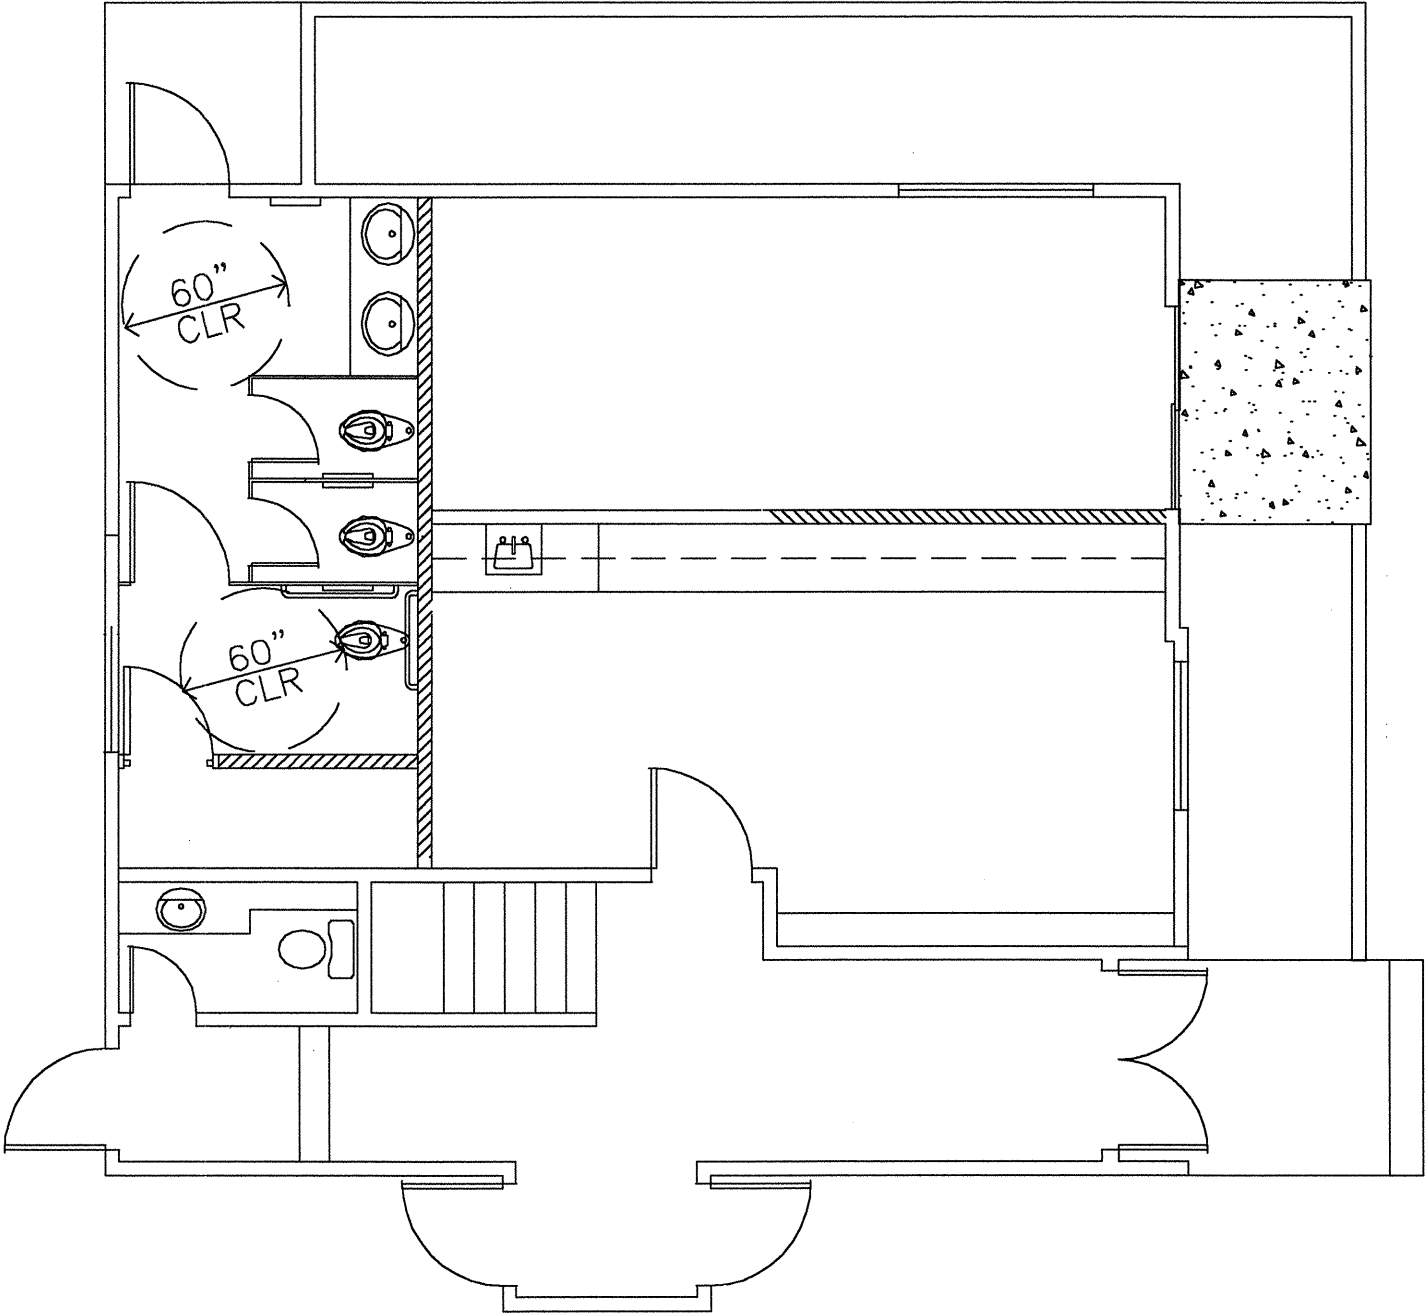

2 NEW RESTROOM PLAN

SCALE: 3/8"=1'-0"

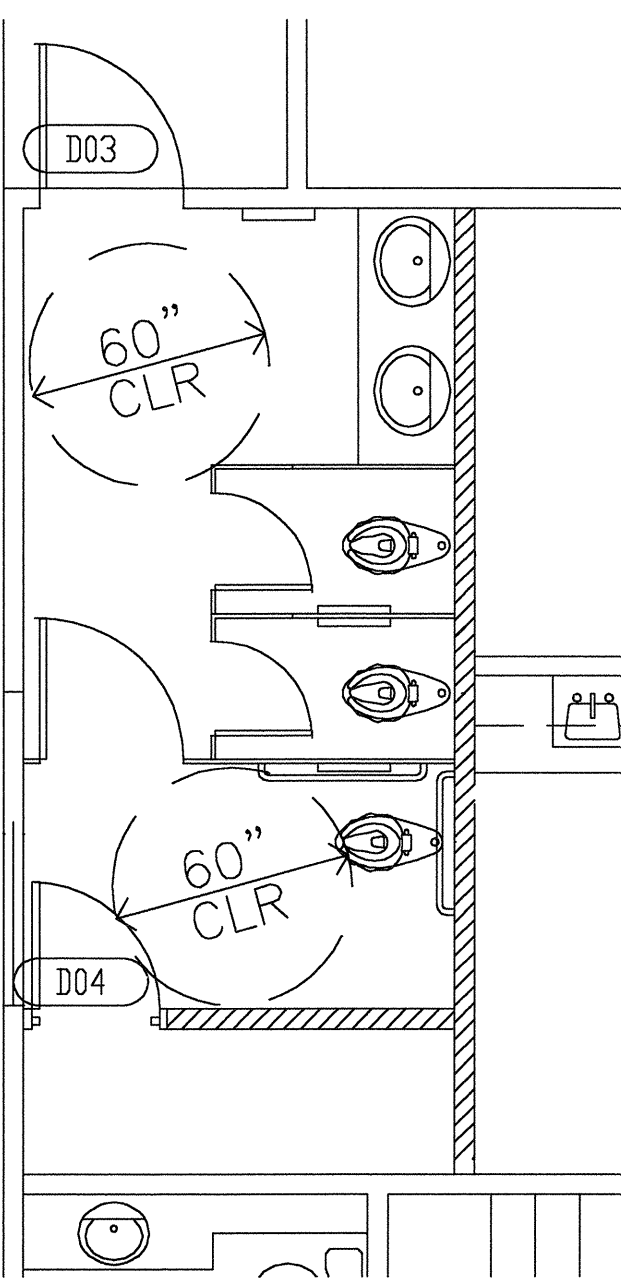

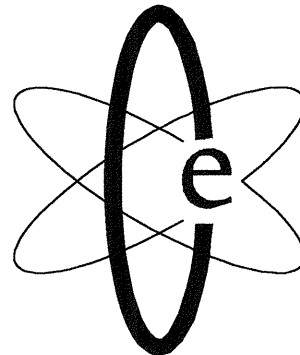A	ISSUED FOR XXX	10.20.03
REVISION #	SUBMISSION	DATE
ST. EDMUNDS CHURCH NURSERY SCHOOL 2975 HUNTINGTON DR. SAN MARINO, CA		
Creative Energy architecture and interiors 61 East Colorado Boulevard Suite 200 Pasadena California 91105 phone 626.304.0505 fax 626.304.0715		
DRAWING TITLE		
GENERAL NOTES		
SEAL	DATE: 10.20.03	PROJECT NO: XXX
		SCALE: 3/8"=1'-0"
		DRAWING NUMBER
		REVISION
		A.0 A