
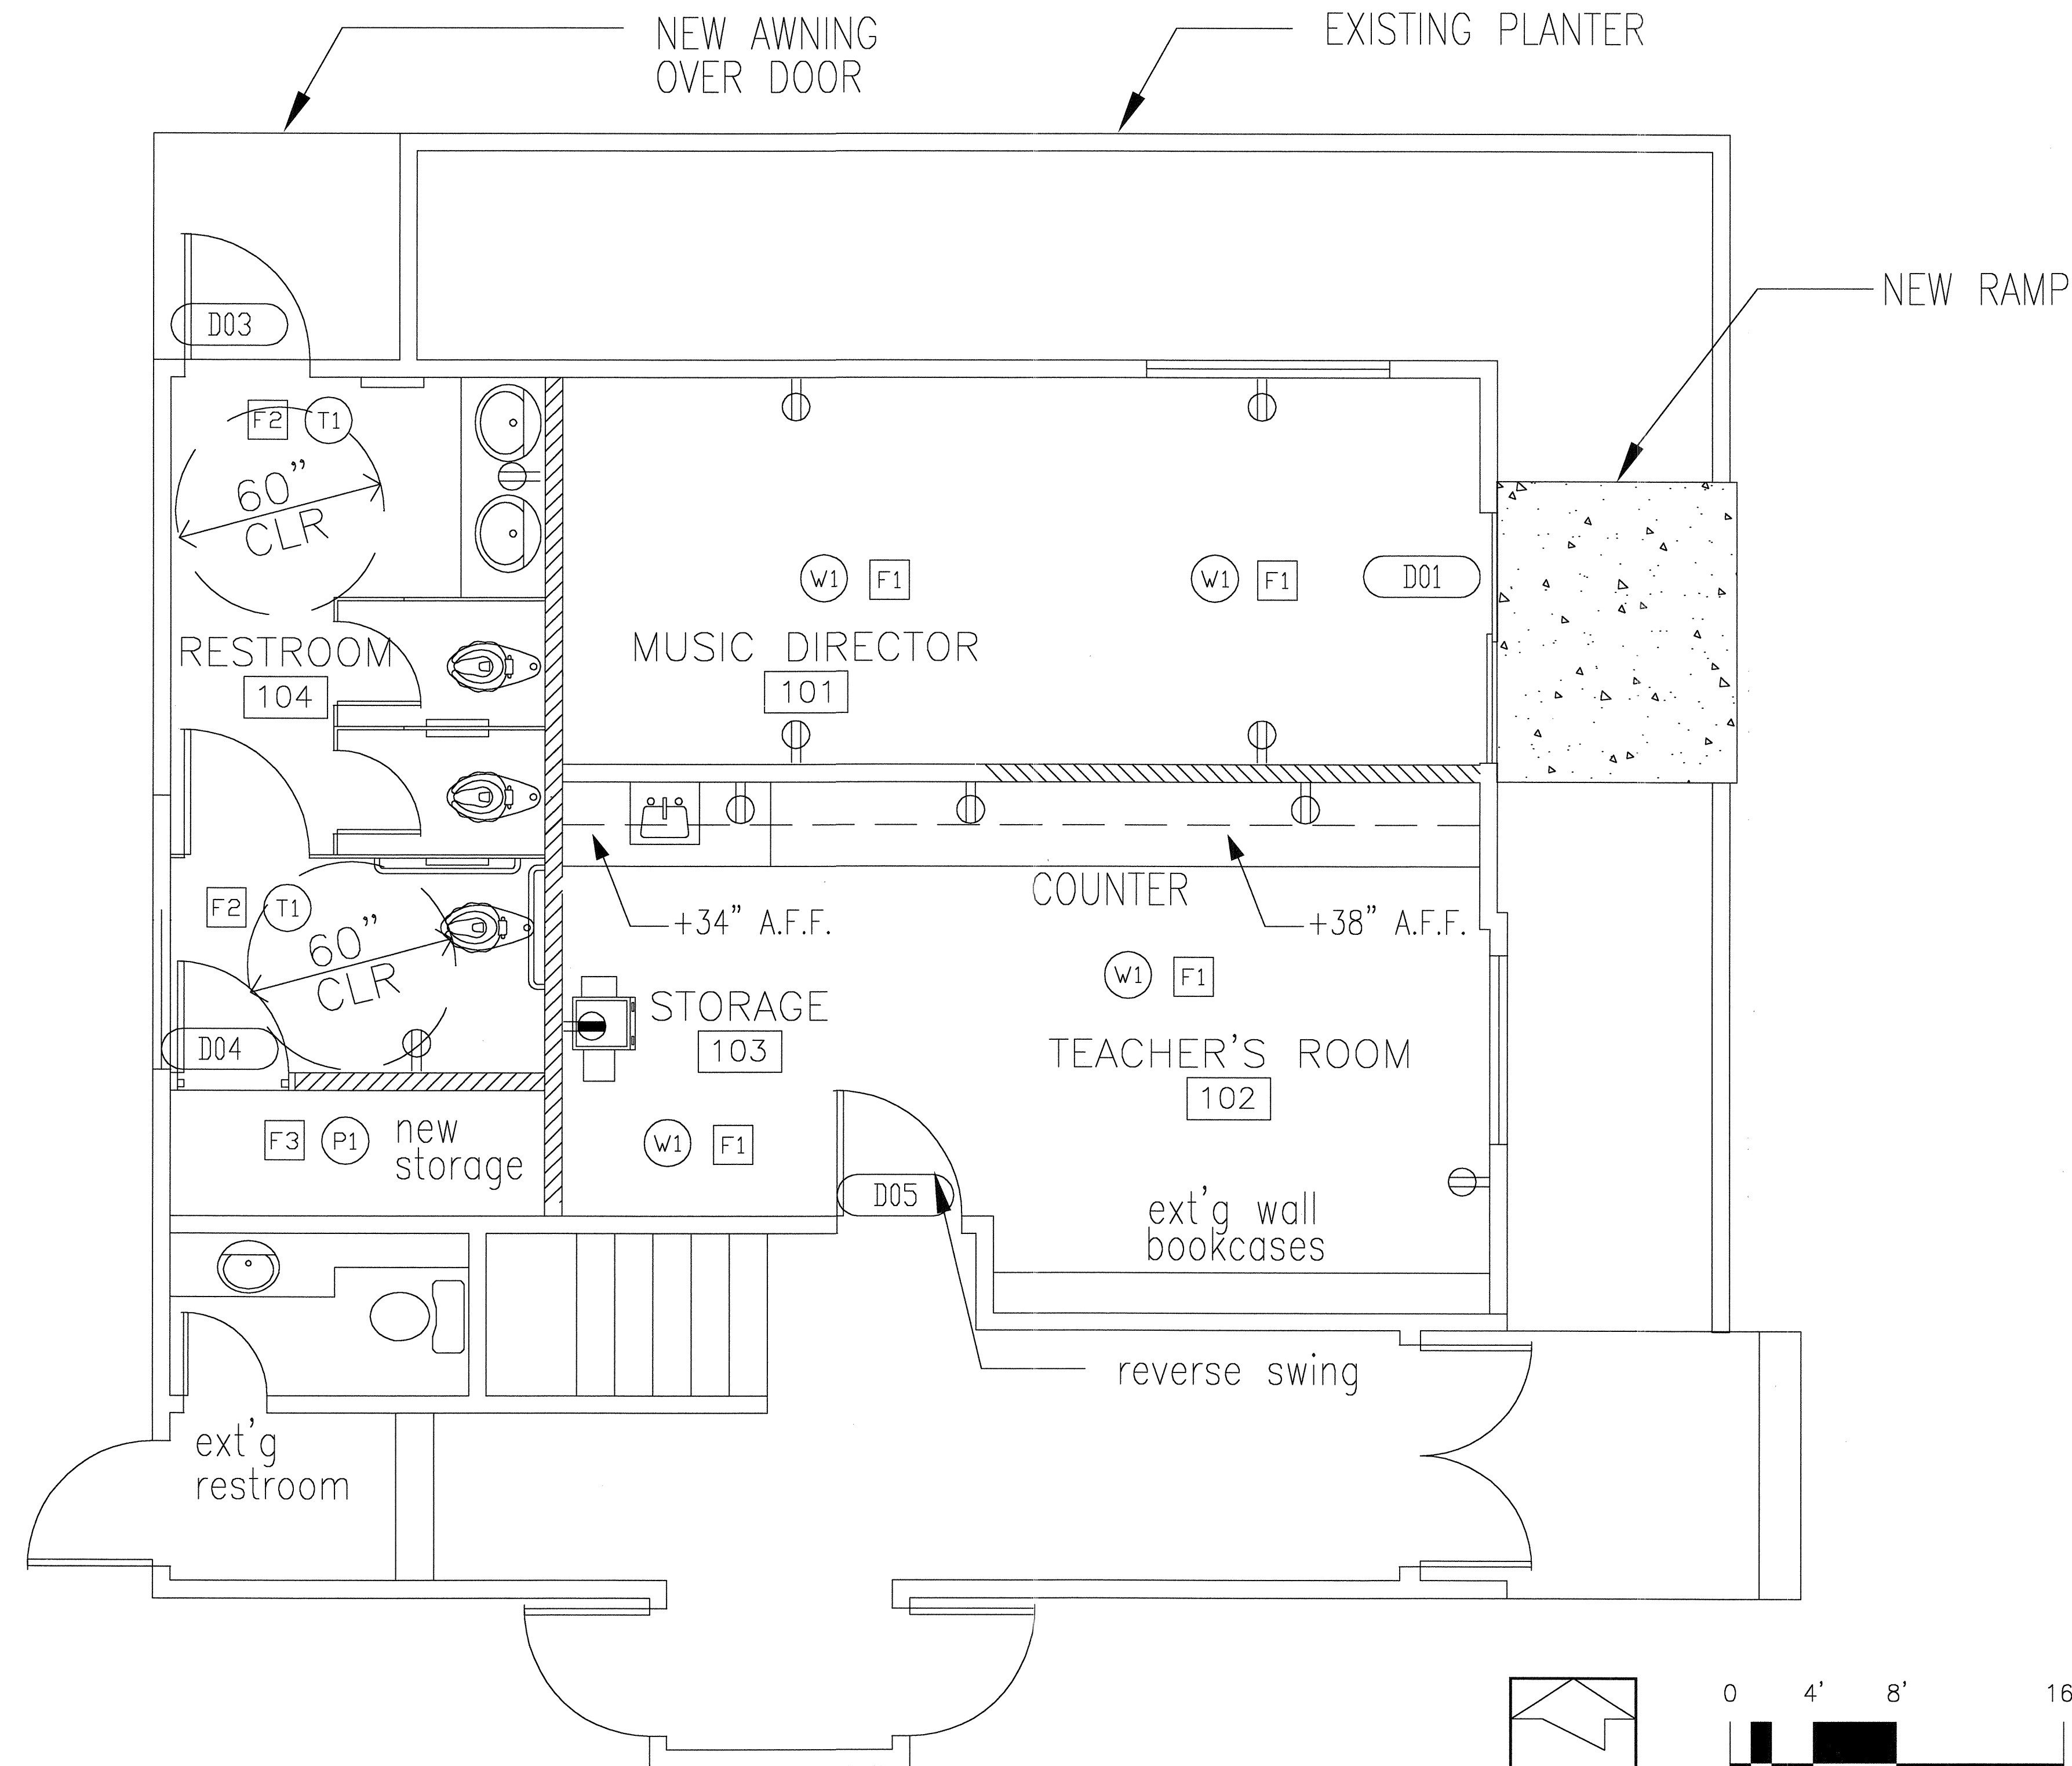


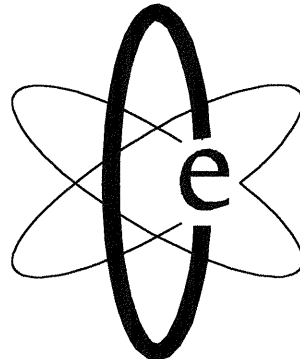

- MILLWORK AND FINISH NOTES:
1. ALL INTERIOR SURFACES OF PLASTIC LAMINATE CABINETS, DRAWERS, AND SHELVING UNITS SHALL BE FABRICATED IN MELAMINE, COLOR TO MATCH P.L. IS SOLID COLOR.
 2. ALL EXPOSED SURFACES INCLUDING INTERIORS OF OPEN SHELVING SHALL BE FABRICATED IN PLASTIC LAMINATE AS SHOWN ON DRAWINGS.
 3. ALL EXPOSED CORNERS OF FULL HEIGHT AND LOW WALLS SHALL RECEIVE 1/2" X 1/2" SATIN FINISH ALUMINUM FULL HEIGHT CORNER GUARDS WHERE PAINT OR WALLCOVERING EXISTS.
 4. ALL CABINET DOORS AND DRAWERS SHALL RECEIVE RUBBER PADS.
 5. ALL WOOD TO RECEIVE STAIN TO MATCH ARCHITECT'S SAMPLE.
 6. ALL MATERIALS MUST BE SUBMITTED FOR APPROVAL AT 3 SETS EACH PRIOR TO ORDER / INSTALLATION.
 7. MILLWORK, MASONRY AND HARDWARE SUBCONTRACTORS SHALL SUBMIT 3 SETS OF SHOP DRAWINGS. SHOP DRAWINGS SHALL BE TO SCALE. INCLUDE ALL DIMENSIONS AND FINISH SPECIFICATIONS AS PER ARCHITECT'S FINISH PLANS.
 8. FLOORING SUBCONTRACTOR SHALL PROVIDE RUBBER TRANSITION STRIP AT ALL CARPET - VINYL TILE TRANSITIONS LOCATIONS.
 9. ALL COUNTER TOPS, 4" BACK AND SIDE RETURNS AND EXPOSED SURFACES TO BE PLASTIC LAMINATE FACED UNLESS OTHERWISE NOTED.
 10. ALL CABINETS TO HAVE BLUM CONCEALED HINGES AND HEAVY DUTY BLUM GLIDES, FULL EXTENSION AT ALL FILE DRAWERS. PROVIDE BUILT-IN PENDAFLEX HANGERS FOR ALL FILE DRAWERS.
 11. PROVIDE 3 3/8" SATIN FINISH WIRE PULLS FOR ALL CABINETS UNLESS SPECIFIED OTHERWISE.
 12. ALL EXPOSED SURFACES TO BE CONSTRUCTED OF PLASTIC LAMINATE UNLESS OTHERWISE NOTED. ALL CLOSED INTERIOR SURFACES TO BE CONSTRUCTED OF 3/4" MELAMINE UNLESS OTHERWISE NOTED. ALL SHELVES SHALL BE 1" THICK MELAMINE. CONTRACTOR TO PROVIDE MELAMINE COLOR SAMPLES TO CREATIVE ENERGY.
 13. ALL SHELVING SHALL BE 1" THICK AND ADJUSTABLE. SHELVING SUPPORTS SHALL BE METAL CLIPS, UNLESS OTHERWISE NOTED.
 14. TOUCH-UP EXISTING CEILING GRID, TILES, & FIXTURES, & DOORS AS NECESSARY.
 15. CLEAN AND OIL ALL EXISTING DOORS.

FINISH PLAN & MILLWORK LEGEND	
F1	CARPET THROUGHOUT MFG: TBD COLOR: TBD BASE: TBD INSTALLATION: 3/8" HIGH TRAFFIC GRADE PAD
F2	CERAMIC TILE MFG: TBD SIZE: TBD COLOR: TBD BASE: TBD
F2	VINYL COMPOSITION TILE MFG: TBD SIZE: TBD COLOR: TBD BASE: TBD INSTALLATION: DIRECT GLUE DOWN PER MANUFACTURER'S RECOMMENDATION
W1	WALL COVERING - VINYL MFG: TBD COLOR: TBD NOTE: WC1 TO RUN TO BASE OF WALL/BEHIND RUBBER BASE
PT1	PAINT THROUGHOUT MFG: TBD COLOR: TBD FINISH: EGGSHELL
PL1	MILLWORK MFG: TBD NUMBER: TBD COLOR: EGGSHELL

A	ISSUED FOR XXX	10.20.03	
REVISION #	SUBMISSION	DATE	
ST. EDMUNDS CHURCH NURSERY SCHOOL 2975 HUNTINGTON DR. SAN MARINO, CA			
 Creative Energy architecture and interiors 61 East Colorado Boulevard Suite 200 Pasadena California 91105 phone 626.304.0505 fax 626.304.0715			
DRAWING TITLE			
FINISH PLAN			
SEAL	DATE: 10.20.03	PROJECT NO: XXX	
		SCALE: 3/8"=1'-0"	
		DRAWING NUMBER	REVISION
		A.4	A