

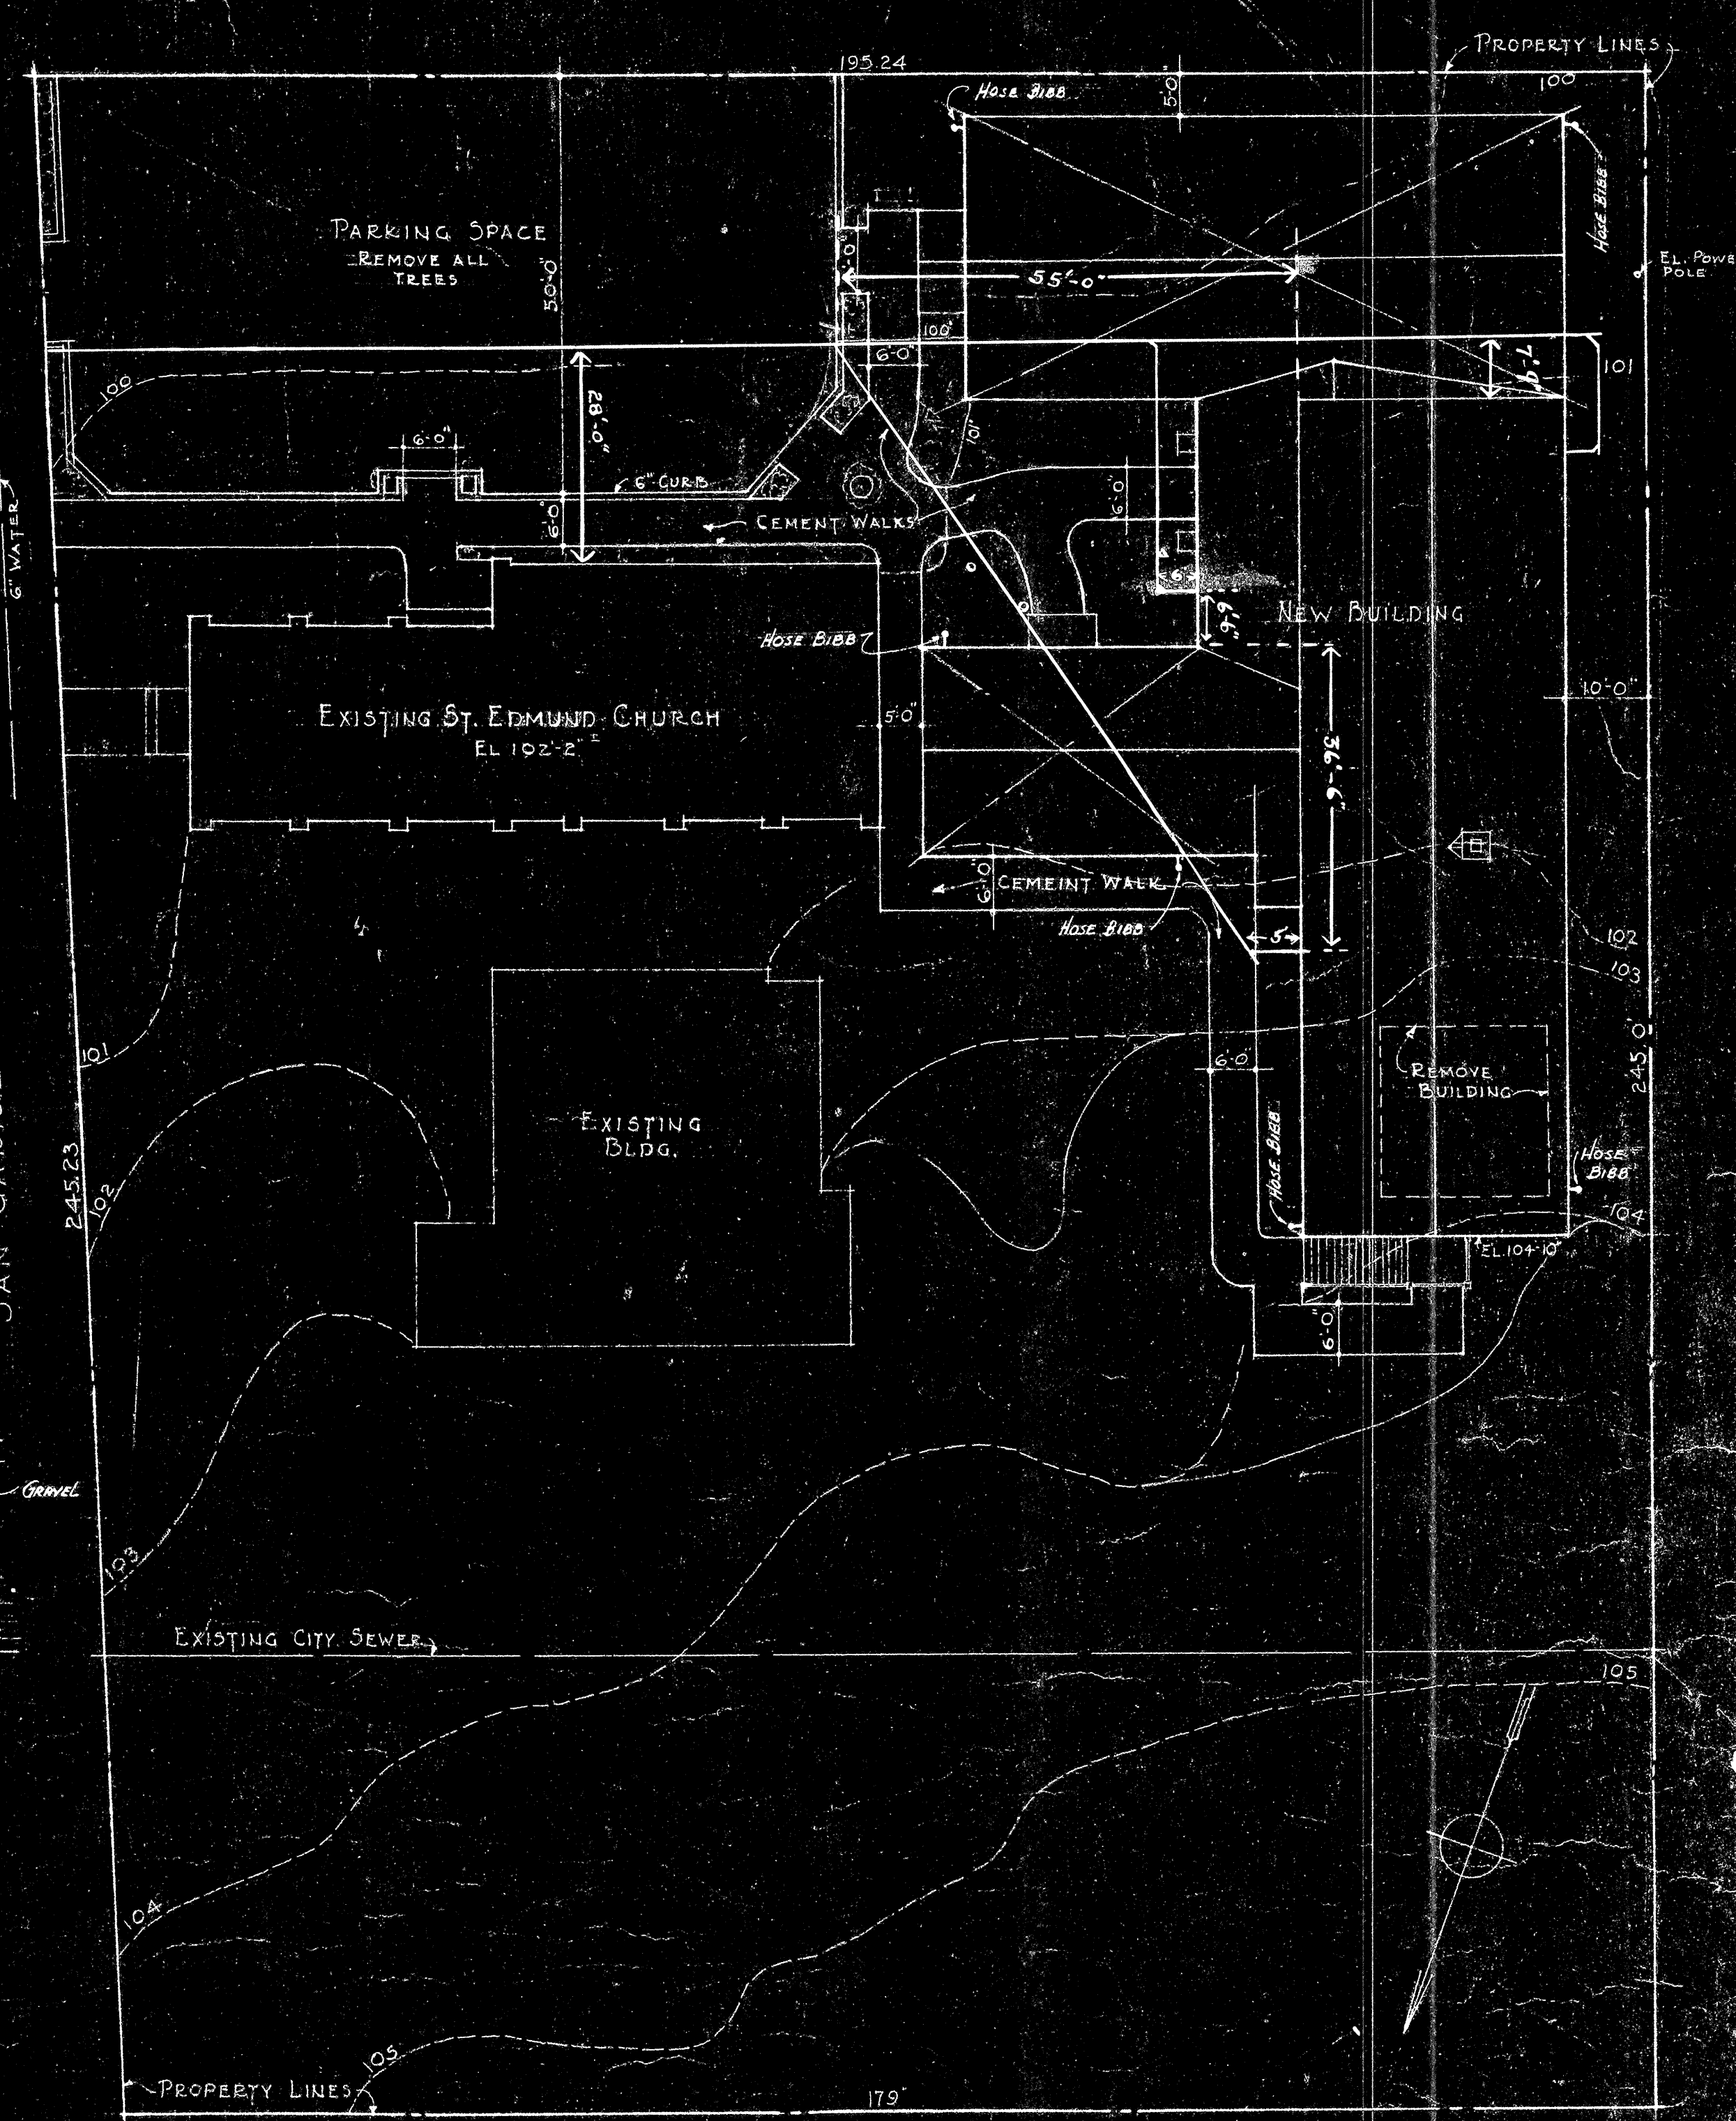


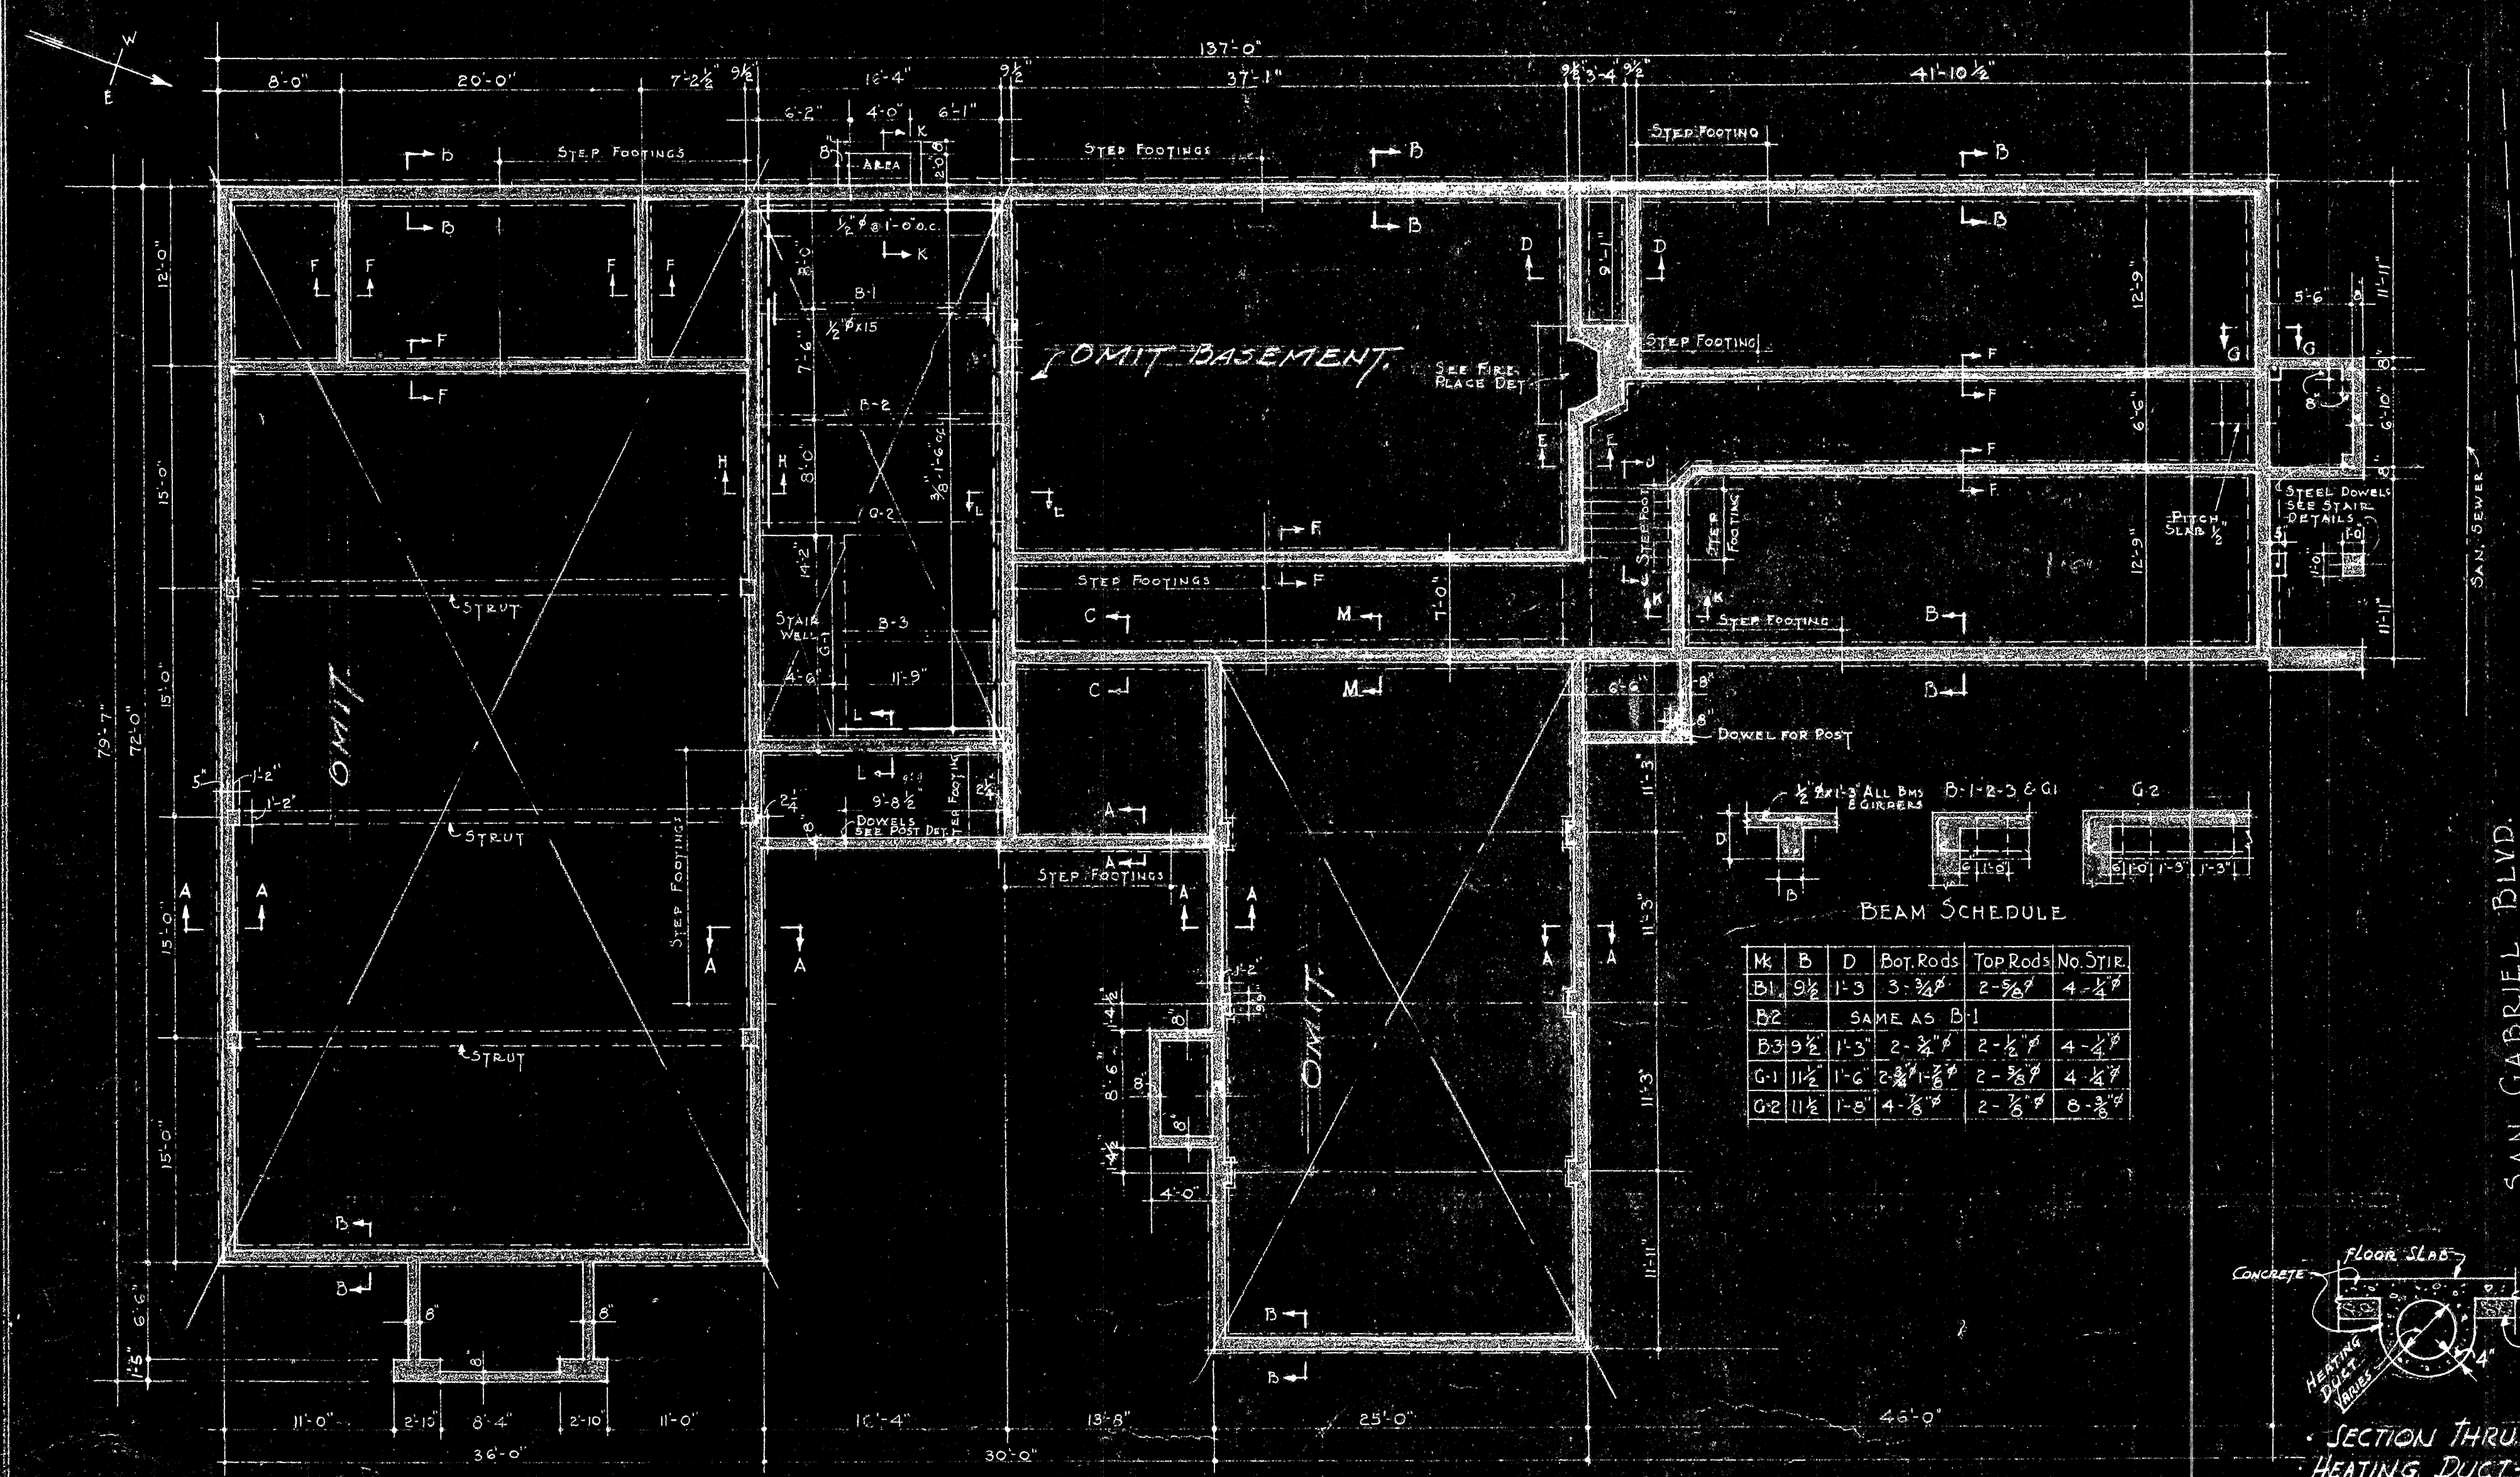

EXCEPT WHERE OTHERWISE NOTED: REINFORCING
RODS SHALL BE 1/2" Ø
ALL BRICK WALLS SHALL HAVE 1/2" Ø 1'-8" O.C.
BOTH WAYS. MIN. REINF.

BASEMENT & FOOTINGS
Scale 1/8" = 1'-0"

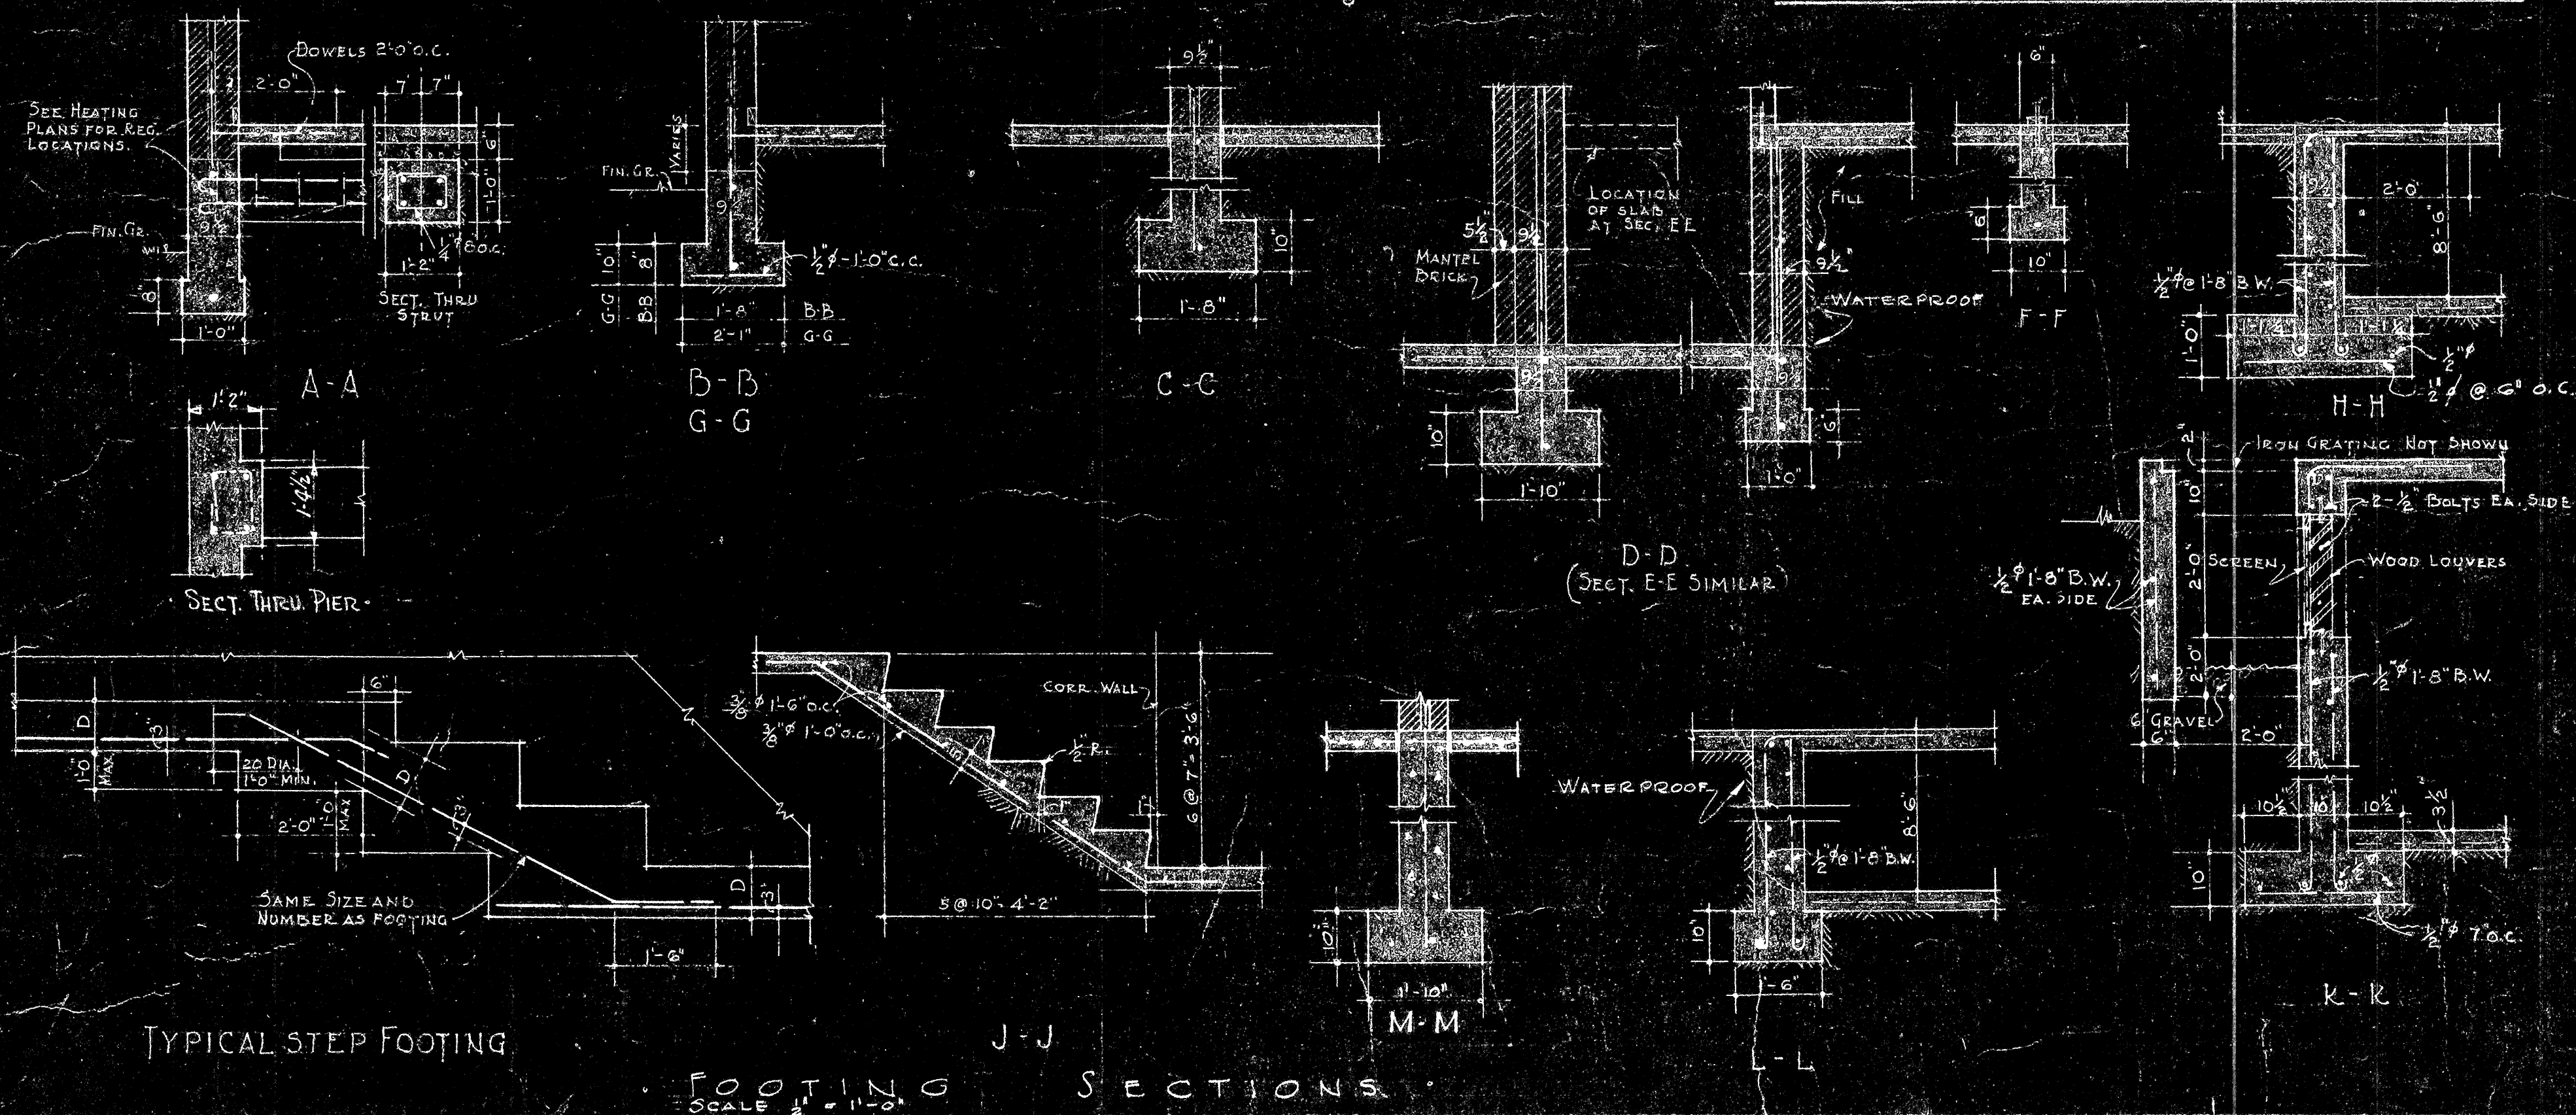

- CONCRETE NOTES**
1. CONTRACTOR MUST VERIFY ALL DIMENSIONS BEFORE STARTING WORK.
 2. MAXIMUM SOIL PRESSURE - 3000 #/sq. ft. D.C.L. LOADS
 3. SOIL CHARACTER - CEMENTED GRAVEL
 4. ALL CONCRETE SHALL HAVE ULTIMATE COMPRESSIVE STRENGTH OF AT LEAST 2000 #/sq. in 28 DAYS
 5. ALL FOOTINGS SHALL BE BUILT ON NATURAL SOLID GROUND AT LEAST 2'-0" BELOW FINISH GRADE
 6. ALL STUD PARTITIONS SHALL ANCHORED WITH 1/2" x 10" BOLTS 4'-0" O.C.
 7. ALL DOWELS SHALL BE 1/2" Ø EXTENDING 2'-0" IN TO MATERIAL EACH SIDE OF JOINT.
 8. ALL BARS SHALL BE PROTECTED WITH 3" OF CONCRETE FROM EARTH & 2" FROM WEATHER.
 9. WATERPROOF BETWEEN ALL BRICK AND EARTH.
- DETAIL OF FLOOR SLAB**
- 3 1/2" CONC. 3 1/2" Ø - 1'-6" C.C. BOTH WAYS
- 6" GRAVEL
- FILL BUNDLE & TAMP

PLOT PLAN & FOOTING PLAN

BASE - BIDS

ALTERNATE #1

ALTERNATE #2

QUINTIN & WESTBERG
3 ARCHITECTS
ALHAMBRA, CALIFORNIA

A PARISH HALL AND CHURCH SCHOOL for ST. EDMUND'S EPISCOPAL CHURCH - SAN MARINO

REVISION: JAN. 25, 1916