

ST. EDMUNDS CHURCH & PRESCHOOL
1175 San Gabriel Blvd
Project : Replace Failed/ Condemned Brick Wall on East Property Line

Construction General Notes :

3. NOTHING CONTAINED IN THESE DRAWINGS OR ANY SPECIFICATIONS IS NECESSARY TO ESTABLISH A CONTRACTUAL RELATIONSHIP BETWEEN THE CONTRACTOR AND ANY OF HIS SUB-CONTRACTORS AND MAJOR DESIGN GROUPS.
4. THE CONTRACTOR SHALL FURNISH ALL LABOR, EQUIPMENT AND MATERIALS NECESSARY TO COMPLETE THE FUNDED PROJECT INCLUDING ALL ITEMS NOT SHOWN ON THE CONTRACT AND REQUIRED FOR THE PROPER CONSTRUCTION OF PROJECT CONSISTENT WITH THE INTENT OF THE CONTRACT DOCUMENTS.
5. ALL WORK SHALL BE ACCOMPLISHED IN A PROFESSIONAL MANNER AND IN ACCORDANCE WITH ALL APPLICABLE MATERIALS CONSISTENT WITH THE CONTRACT DOCUMENTS, AND ALL CIVIL CODES WITH ALL APPLICABLE BUILDING CODES.
6. THE GENERAL CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND CONDITIONS BEFORE BEGINNING WORK. MAJOR DESIGN GROUP SHALL BE NOTIFIED OF ANY DISCREPANCY.
7. NOTES AND DETAILS ON DRAWINGS SHALL TAKE PRECEDENCE OVER DETAILS ON THESE GENERAL CONDITIONS.
8. ALL MATERIAL AND WORKMANSHIP SHALL CONFORM TO THE CALIFORNIA AND UNIFORM BUILDING CODE, LATEST EDITION.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING ALL NECESSARY PERMITS, ETC. IT IS THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS, ETC. THE CONTRACTOR SHALL BE CONSIDERED BY MAJOR DESIGN GROUP OR ANY OTHER GROUP TO BE RESPONSIBLE FOR THE STABILITY OF THE STRUCTURE FOR THE ENTIRE LIFE OF THE PROJECT. SUGAR BEACH FLOOR DRAPINGS AND FISH MATERIALS: HE SHALL PROVIDE FOR THE PROTECTION OF THE SUGAR BEACH FLOOR DRAPINGS AND FISH MATERIALS. HE SHALL PROVIDE FOR THE APPLICATION OF THE ABOVE-MENTIONED MATERIALS. HE SHALL BE RESPONSIBLE TO THE MAJOR DESIGN GROUP FOR THE PROTECTION OF THE SUGAR BEACH FLOOR DRAPINGS AND FISH MATERIALS.
10. VIBRATION, CRACKS OR MECHANICAL EQUIPMENT HAVE NOT BEEN CONSIDERED BY MAJOR DESIGN GROUP AND ASSOCIATES OR CONSULTING DESIGN GROUP.
11. COINCIDENT SLAB ON GRADE HAS NOT BEEN DESIGNED BY MAJOR DESIGN GROUP AND ASSOCIATES OR CONSULTING DESIGN GROUP.
12. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO TAKE ALL NECESSARY PRECAUTIONS TO PROTECT THE WORK AND NOT TO PROTECT THEM FROM DAMAGE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION AND REPLACEMENT IN CONNECTION WITH THE PROTECTION OF THE SUGAR BEACH FLOOR DRAPINGS AND FISH MATERIALS.

Site Preparation Notes

1. THE PREPARATION OF THE SITE FOR CONSTRUCTION SHALL INCLUDE THE REMOVAL OF ALL RUBBISH, DEBRIS, TREES AND TREE TRUNKS, OR ANY OTHER ITEM WHICH MAY BE DETRIMENTAL TO THE FOUNDATION OF THE STRUCTURE.
2. ALL FINISHED GRADING MUST CARRY WATER AWAY FROM THE STRUCTURE BY APPROVED MEANS TO APPROVED DRAINAGE.

Flashing/Waterproofing Notes

1. ALL EXTERIOR SIDING SHALL BE APPLIED OVER AN APPROVED WEATHER PROTECTION SURFACE CONFORMING TO SECTION 1707(b) OF THE UNIFORM BUILDING CODE.
2. ALL EXTERIOR OPENINGS SHALL BE WEATHERPROOFED IN ACCORDANCE WITH SECTION 1707(b) OF THE UNIFORM BUILDING CODE.
3. ALL FOUNDATION WALLS BELOW GRADE SHALL BE DAMPROOFED IN ACCORDANCE WITH SECTION 1707(b) OF THE UNIFORM BUILDING CODE.

Electrical Notes

1. ALL ELECTRICAL, WIRING, SWITCHES, AND RECEPTACLES SHALL BE INSTALLED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE, LATEST ADOPED EDITION.
2. ALL SWITCHES SHALL BE LOCATED 42" ABOVE THE FINISH FLOOR AND BE OF THE SILENT THROW TYPE.
3. ALL CONVENIENCE OUTLETS SHALL BE LOCATED 18" ABOVE THE FINISH FLOOR AND BE OF THE SILENT THROW TYPE. ALL OUTLETS SHALL BE 42" ABOVE THE FINISH FLOOR. ALL WIRELESS FOR WASHERS, DRYERS, AND OTHER MECHANICAL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
4. ALL EXTERIOR AND INTERIOR ELECTRICAL OUTLETS SUBJECT TO MOISTURE SHALL HAVE GROUND FAULT INTERRUPTION DEVICES. ALL EXTERIOR OUTLETS SHALL HAVE WATERPROOF COVERS.

Plumbing Notes

1. ALL MECHANICAL AND PLUMBING WORK SHALL CONFORM TO THE LATEST ADOPTED EDITION OF THE UNIFORM PLUMBING AND MECHANICAL CODES.

Fire Warning/Resistance Notes

1. PROVIDE FIRE RESISTIVE CONSTRUCTION IN AREAS REQUIRED BY SECTION 503(d.4) OF THE UNIFORM BUILDING CODE.
2. PROVIDE FIRE RESISTIVE CONSTRUCTION UNDER ALL USEABLE STAIR SPACE IN ACCORD WITH SECTION 3305(m) OF THE UNIFORM BUILDING CODE.


Property Information

PROJECT ADDRESS:	St Edmunds Episcopal Church 1175 SAN GABRIEL BLVD. SAN MARINO, CALIFORNIA 91108
OWNER:	St Edmunds Episcopal Church 1175 SAN GABRIEL BLVD. SAN MARINO, CALIFORNIA 91108 TEL:626-792-7742 Fr. George Woodward
TENANT	St Edmunds Preschool 1175 SAN GABRIEL BLVD. SAN MARINO, CALIFORNIA 91108 TEL:626-792-7742 Mrs. Dorene Porter
ARCHITECT:	THE ALPINE GROUP 675 S ARROYO PARKWAY SUITE 500 PASADENA, CALIFORNIA 91005 TEL: 626-235-1841 CHARLES YOUNGBLOOD STATE OF CALIFORNIA STATE LICENSE WG 0246037
BUILDING TYPE:	NOT APPLICABLE
STORIES:	1&2
PROJECT SQUARE FOOTAGE	280 LF OF PROPERTY FRONTAGE WALL AFFECTED
BUILDING CODE OCCUPANCY:	A ASSEMBLY
BUILDING IS FULLY SPRINKLERED:	YES

SCOPE OF WORK: THE EASTERN PROPERTY - PRIVACY (BRICK) WALL WAS CONDEMNED AND DEMOLISHED, ALONG WITH EIGHT TREES (AND ROOT BALLS) THAT UNDERMINED THE ORIGINAL WALL. DUE TO THE EXTREMELY LIMITED TIME AVAILABLE TO PREPARE A NEW WALL, THE CITY OF SAN MARINO HAS COMENSEMENT OF PRESCHOOL ACTIVITIES IN AUGUST, A REPAIR BY REPLACEMENT PROJECT IS CHOSEN BY OWNERSHIP TO ALLOW CITY PLANNING DEPARTMENT THE ABILITY TO WORK WITH THE BOARD HEARING PHASE AND PROCEED TO PLAN CHECK REVIEW. THE NEW RETAINING WALL OR LOWERED EXISTING WALLS WILL MATCH THE EXISTING BRICK APPEARANCE AS CLOSELY AS POSSIBLE. THE FINAL BRICK VENEER WILL BE APPROVED BY OWNERS & CITY OF SAN MARINO


Sheet Index

- A0.1 COVER SHEET SPECIFICATIONS
PARTIAL SITE PLAN, STANDARD RETAINING WALL DETAIL
- A3.1 DEMOLITION PLAN, DIMENSION PLAN, CONSTRUCTION PLAN
CONSTRUCTION DETAILS SITE PLAN

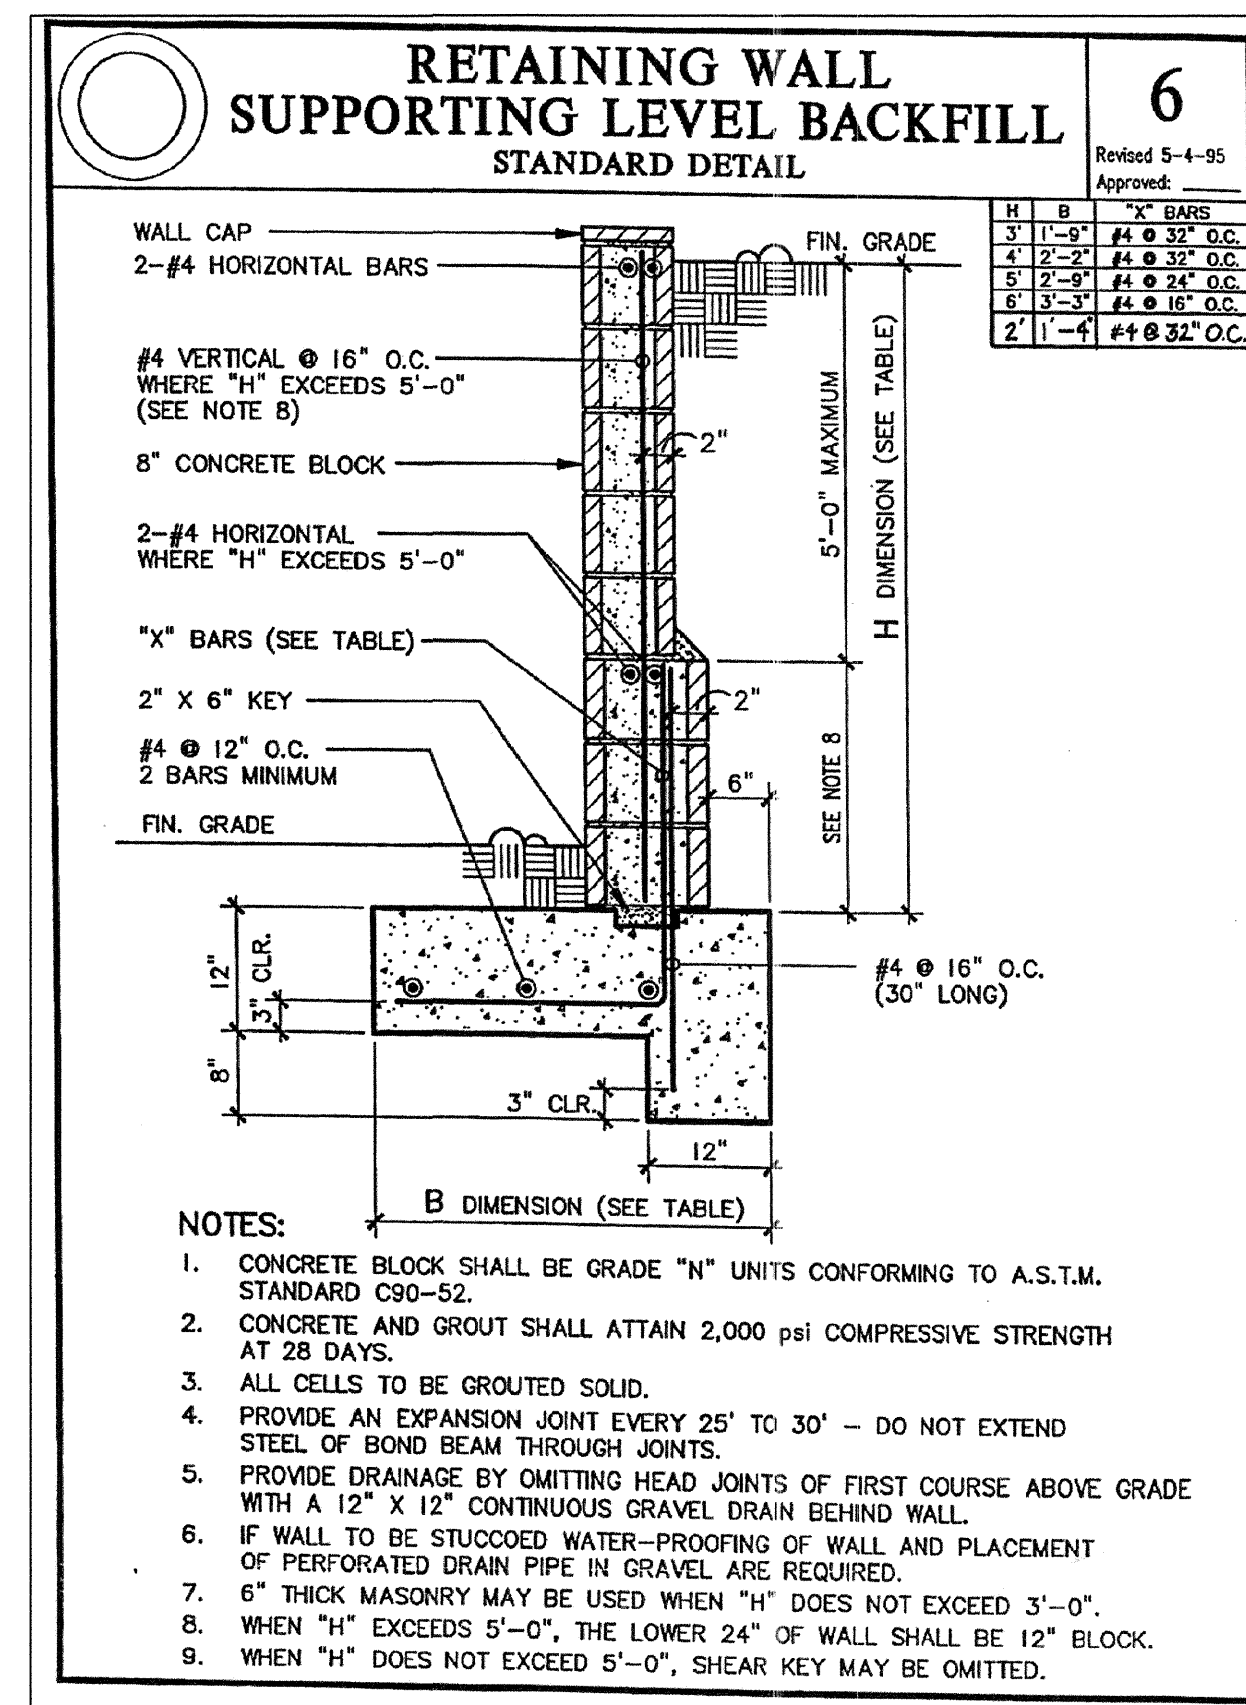

Standard Retaining Wall Detail

City of San Marino

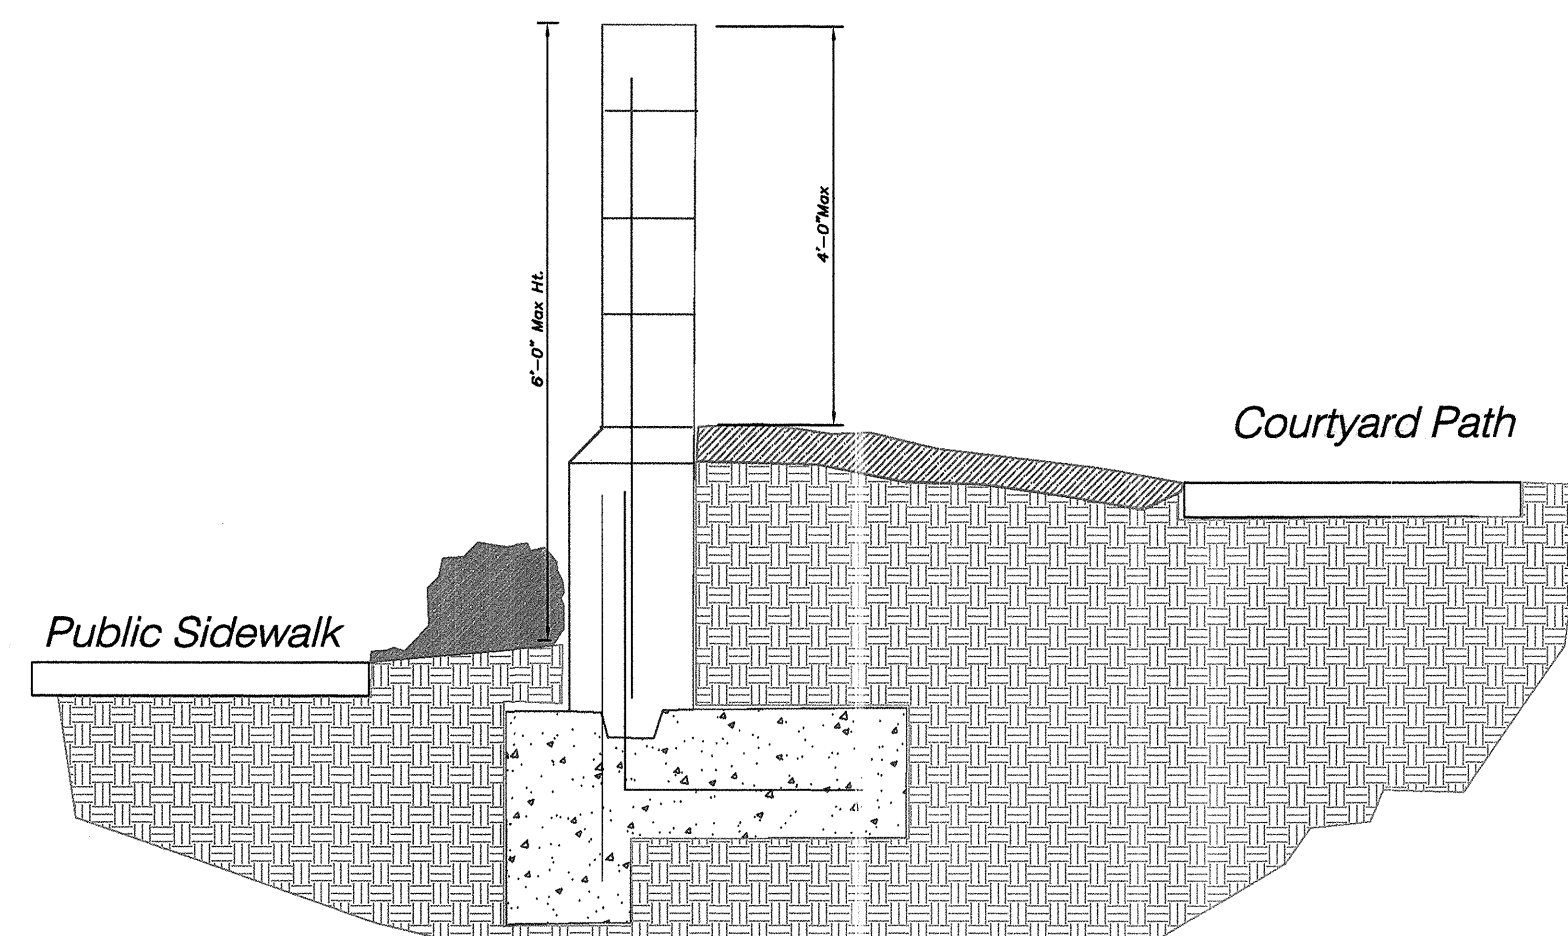


Section 1 Retaining Wall - Courtyard Elevation- Public Way Elevation

Not to Scale


Site Location Plan

City of San Marino

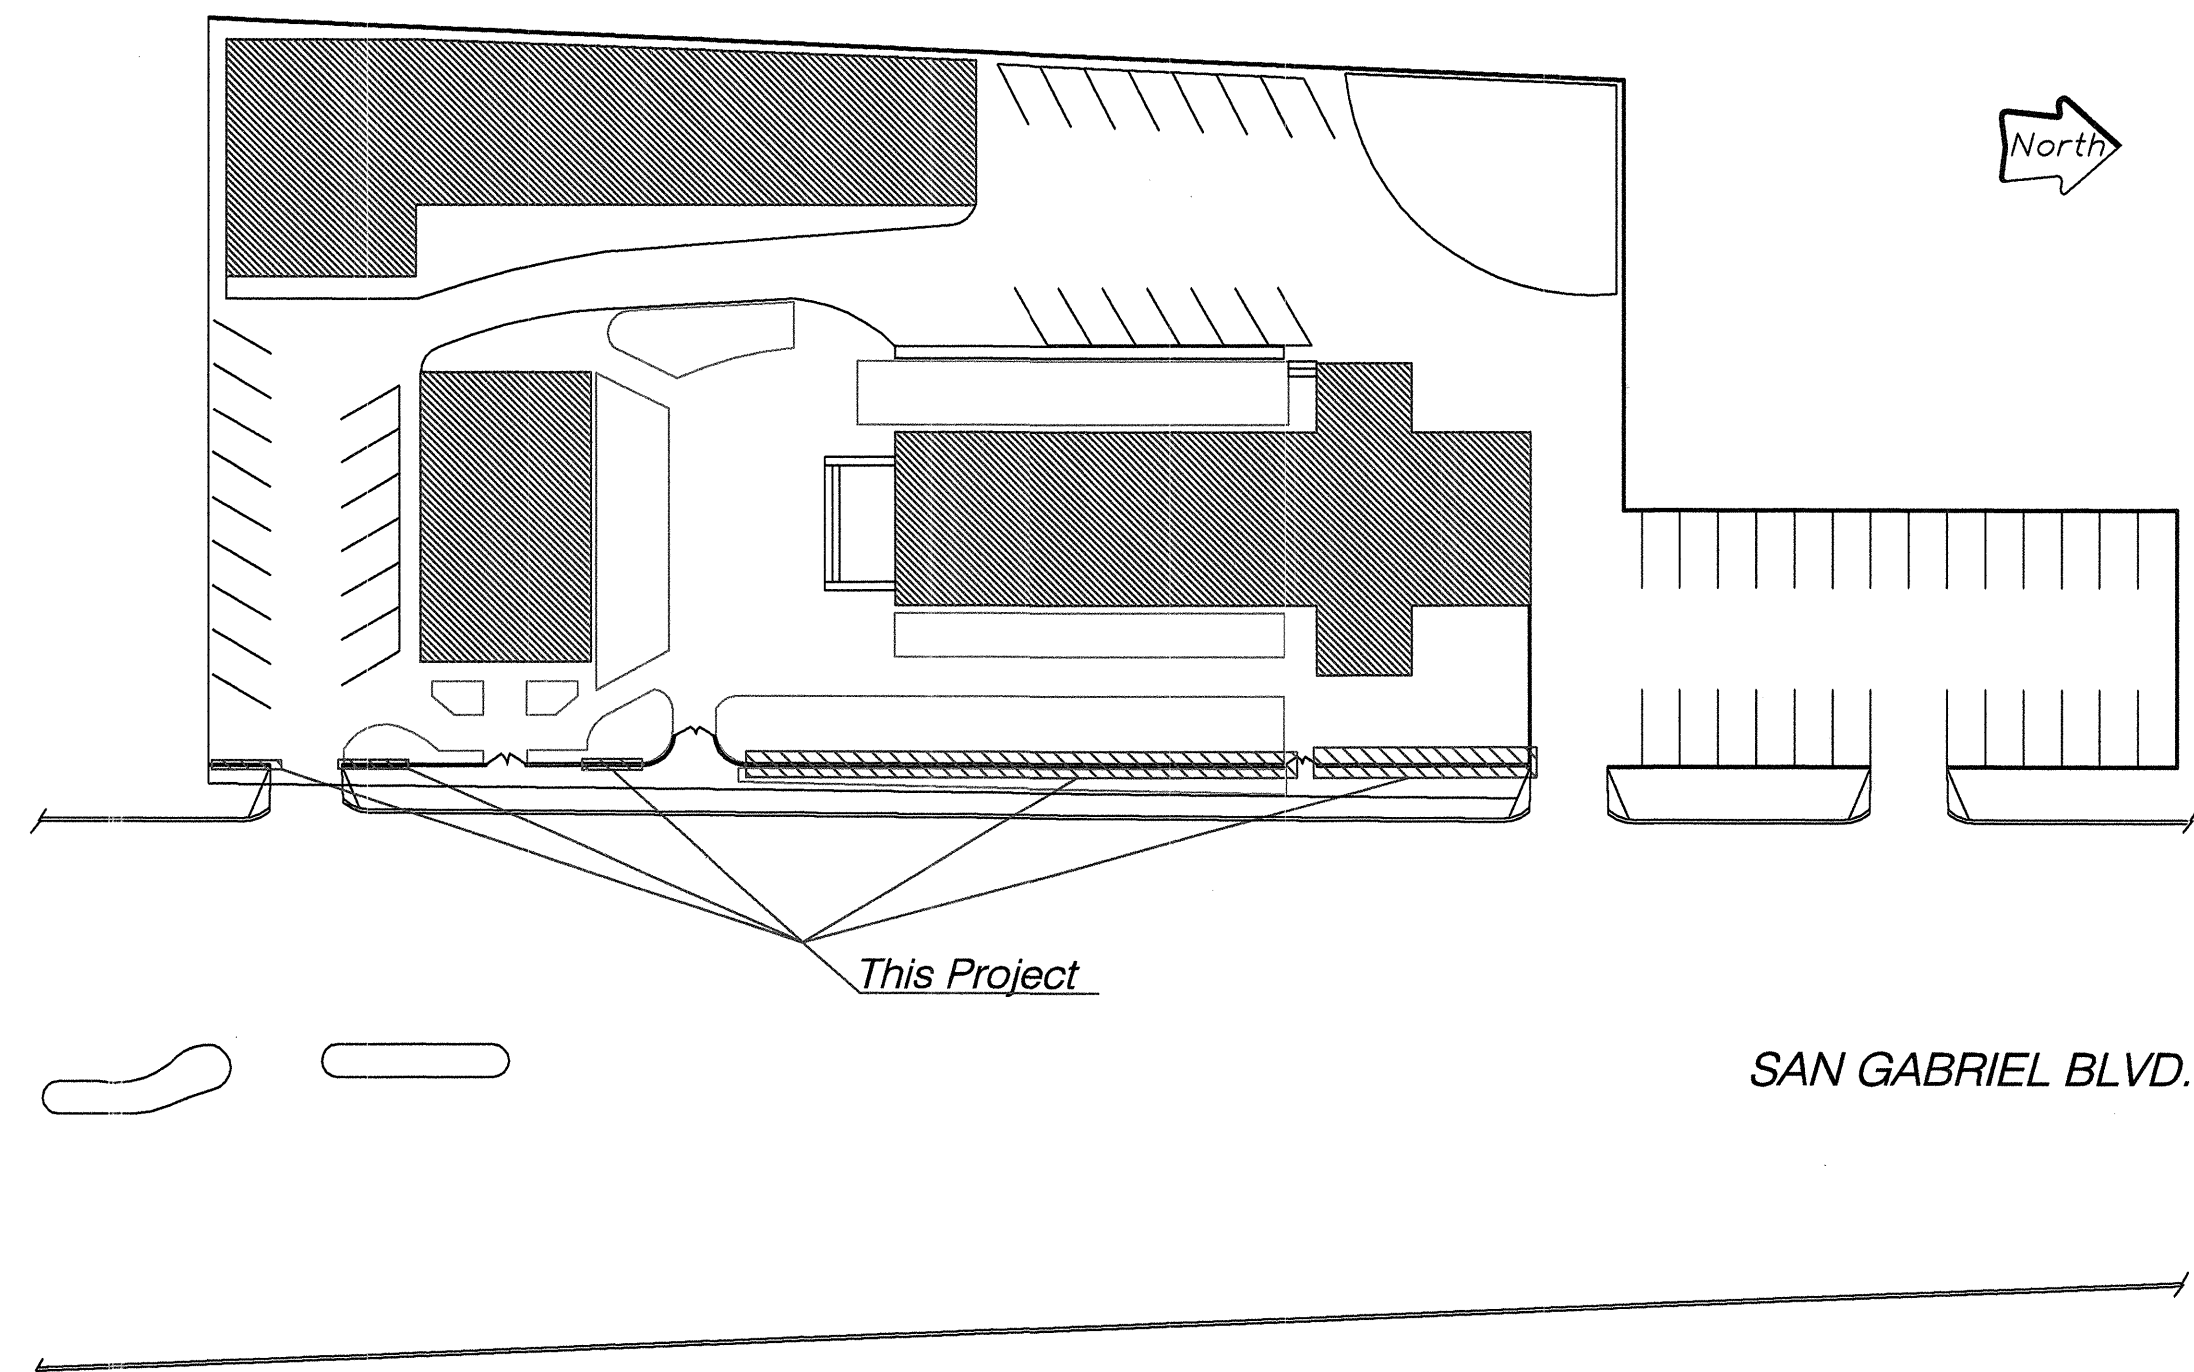

Vicinity Map

City of San Marino

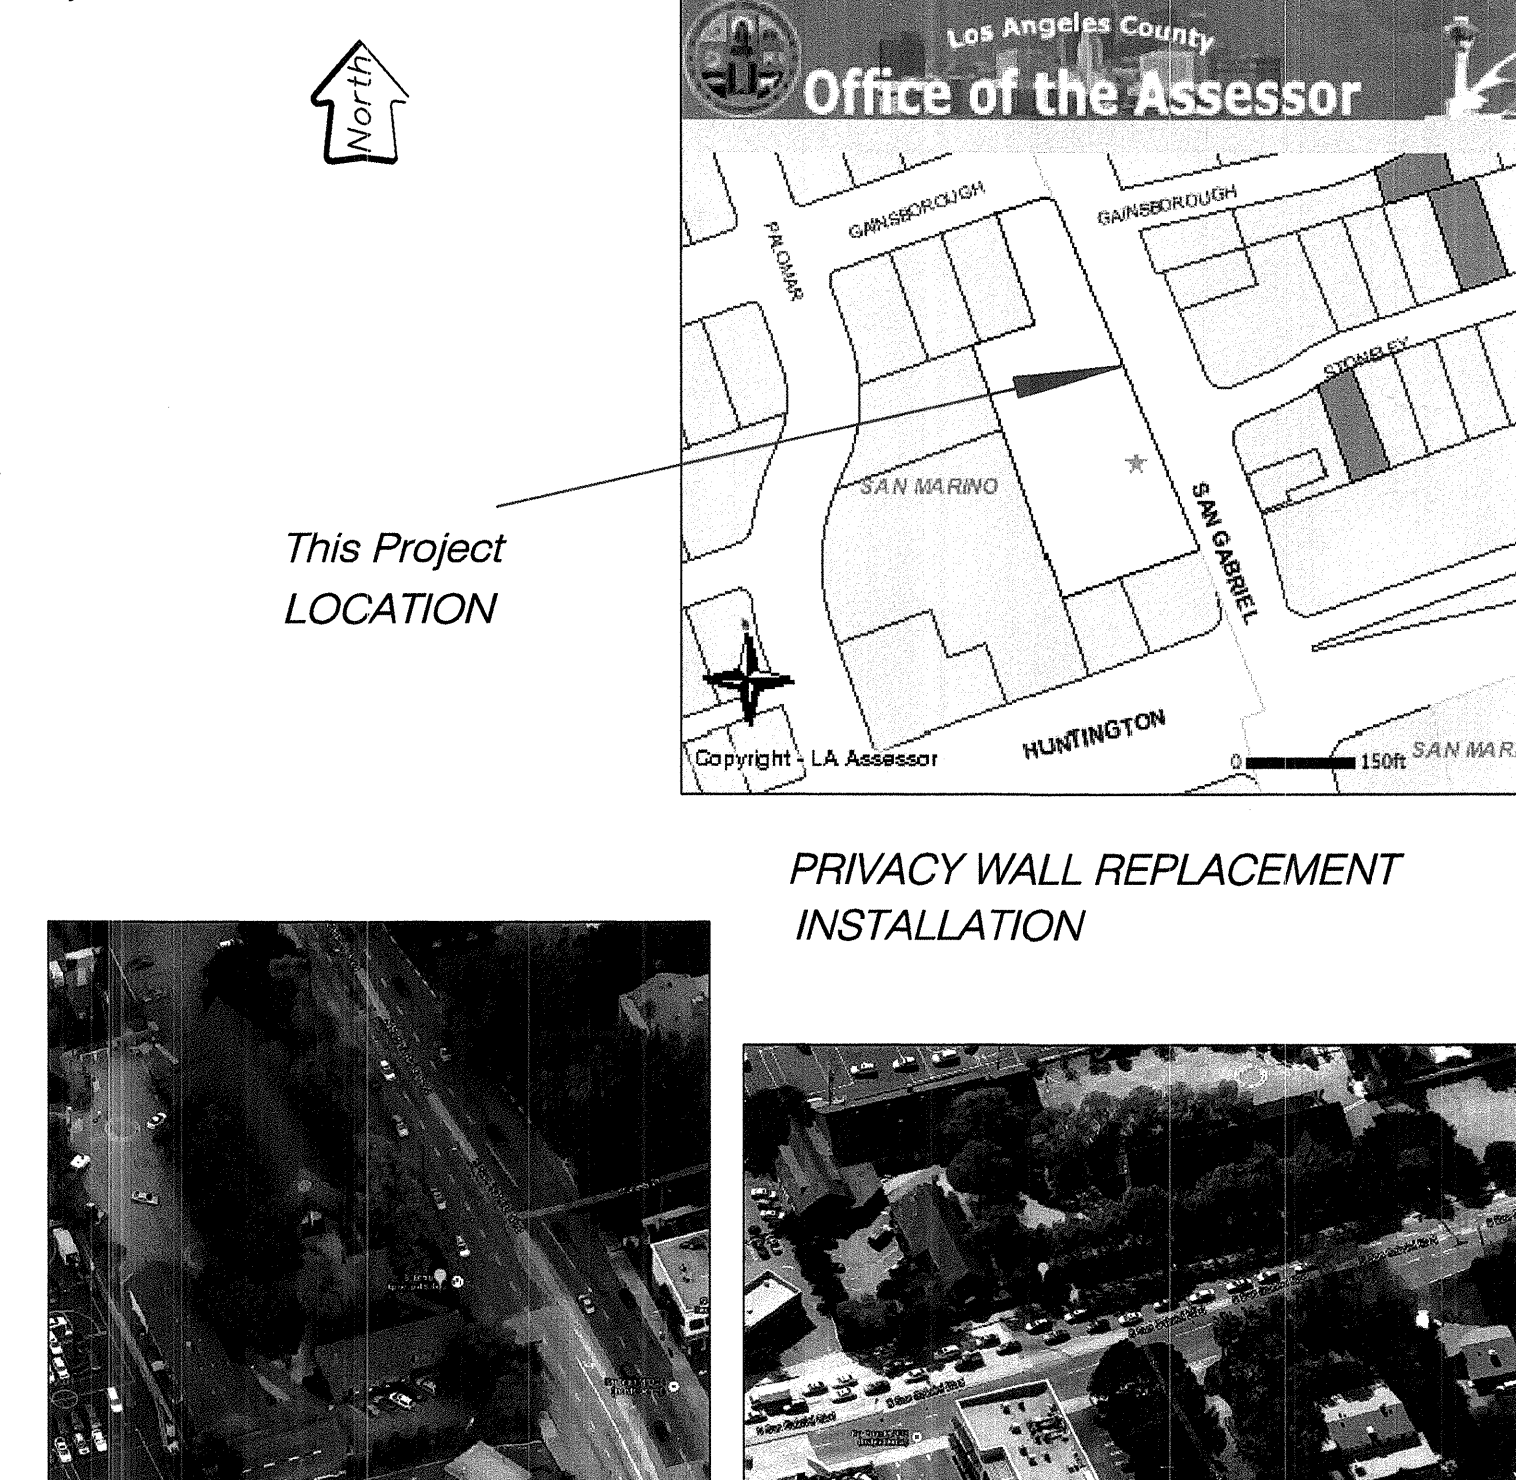


This Project
LOCATION

PRIVACY WALL REPLACEMENT INSTALLATION



Alpine Group
2275 Huntington Drive Suite 414
SAN MARINO, CALIFORNIA 91108
PHONE: (626) 251-1711; FAX: (626) 251-1701

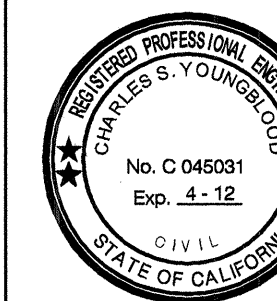

STEDMUNDS CHURCH & PRESCHOOL
RETAINING WALL & MISC WALL REPAIRS
REPAIR BY REPLACEMENT PROJECT

1175 San Gabriel Blvd.

[illegible]

SHEET TITLE
Demolition Plan, Dimension Plan
Construction Plan,
Information, Vicinity Map

REVIEWED AND APPROVED
SIGNATURE

D/

SCALE As Noted	DATE 01/11/01
JOB NO. 1308	
REV. 	SHEET
SHEET NO.	