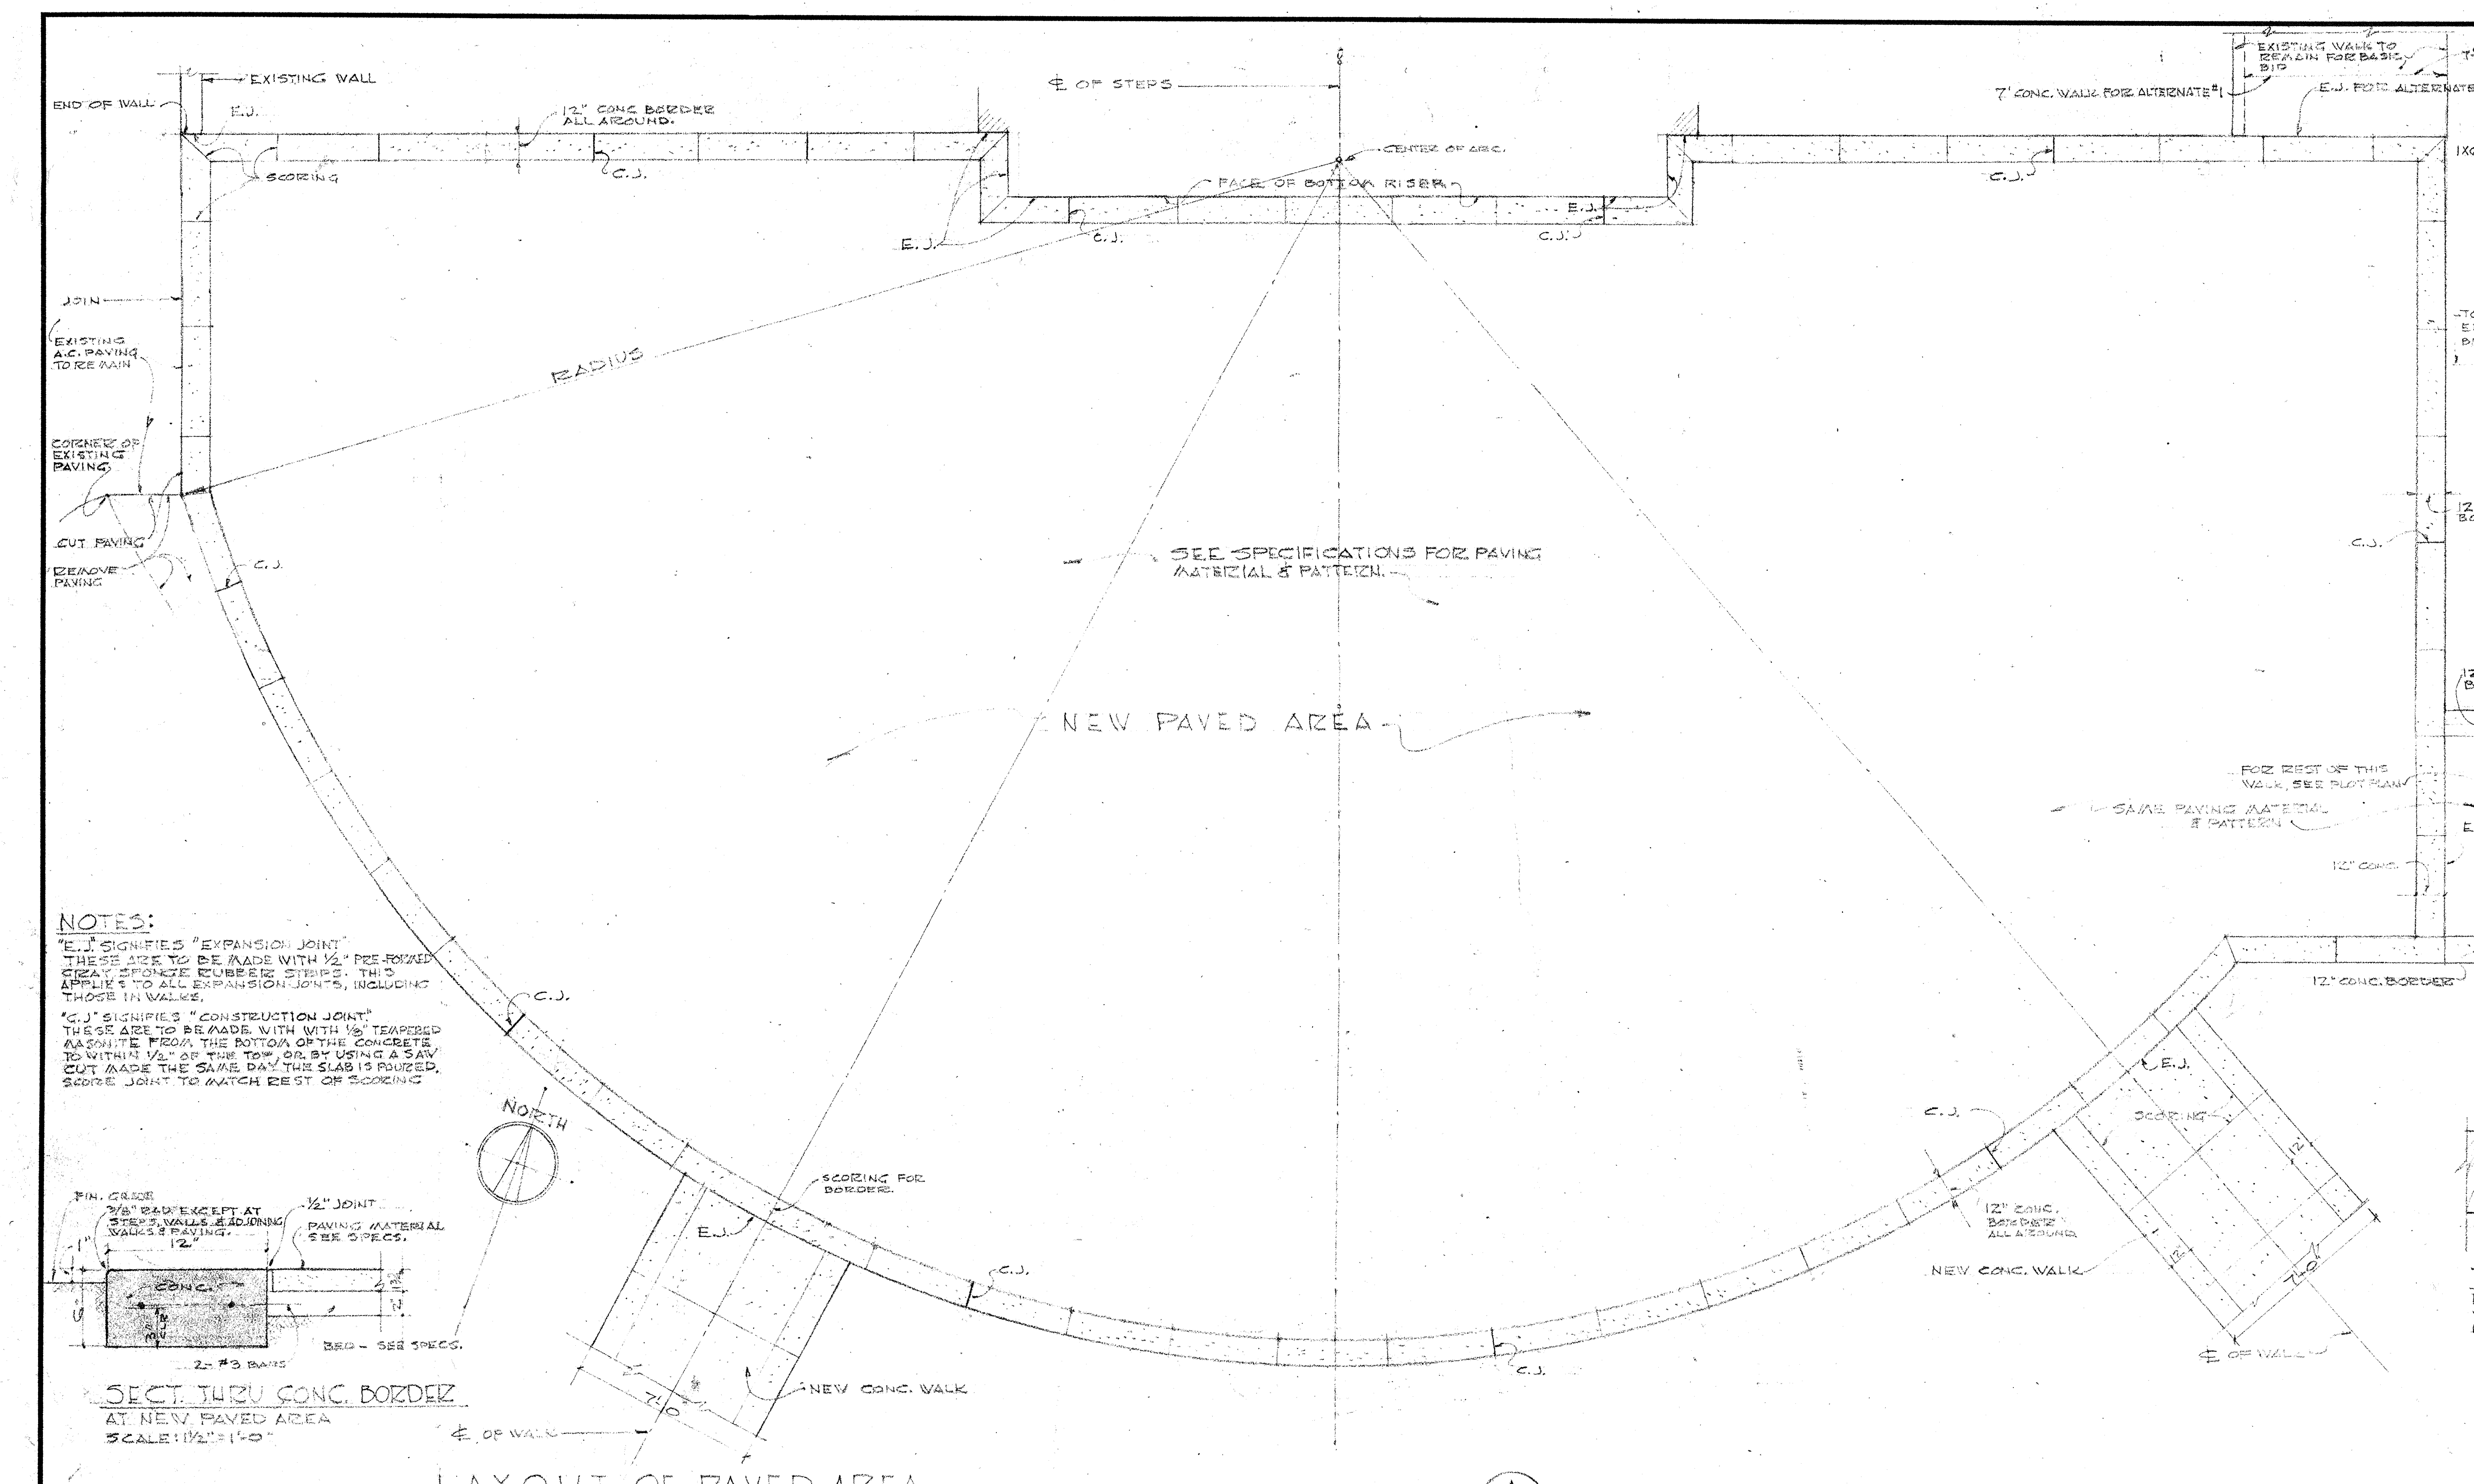
EXISTING WALL
END OF WALL
E.J.
12" CONC. BORDER ALL AROUND.
℄ OF STEPS
CENTER OF ARC.
FACE OF BOTTOM RISER
7" CONC. WALL FOR ALTERNATE #1
EXISTING WALL TO REMAIN FOR BASIC BID
E.J. FOR ALTERNATE #1
C.J.
SCORING
JOIN
EXISTING A.C. PAVING TO REMAIN
CORNER OF EXISTING PAVING
CUT PAVING
REMOVE PAVING
RADIUS
SEE SPECIFICATIONS FOR PAVING MATERIAL & PATTERN.
NEW PAVED AREA
FOR REST OF THIS WALK, SEE PLOT PLAN
SAME PAVING MATERIAL & PATTERN
12" CONC. BORDER
NORTH
SCORING FOR BORDER.
12" CONC. BORDER ALL AROUND
NEW CONC. WALK
℄ OF WALK
FIN. GRADE
3/8" RAD. EXCEPT AT STEPS, WALLS & ADJOINING WALKS & PAVING.
12"
1/2" JOINT
PAVING MATERIAL SEE SPECS.
CONC.
BED - SEE SPECS.
2-#3 BARS

NOTES:

"E.J." SIGNIFIES "EXPANSION JOINT"
THESE ARE TO BE MADE WITH 1/2" PRE-FORMED GRAY SPONGE RUBBER STRIPS. THIS APPLIES TO ALL EXPANSION JOINTS, INCLUDING THOSE IN WALKS.

"C.J." SIGNIFIES "CONSTRUCTION JOINT"
THESE ARE TO BE MADE WITH WITH 1/8" TEMPERED MASONITE FROM THE BOTTOM OF THE CONCRETE TO WITHIN 1/2" OF THE TOP, OR BY USING A SAW CUT MADE THE SAME DAY THE SLAB IS POURED. SCORE JOINT TO MATCH REST OF SCORING

SECT. THRU CONC. BORDER
AT NEW PAVED AREA
SCALE: 1½"=1'-0"

LAYOUT OF PAVED AREA
SCALE: 1/4"=1'-0"

A

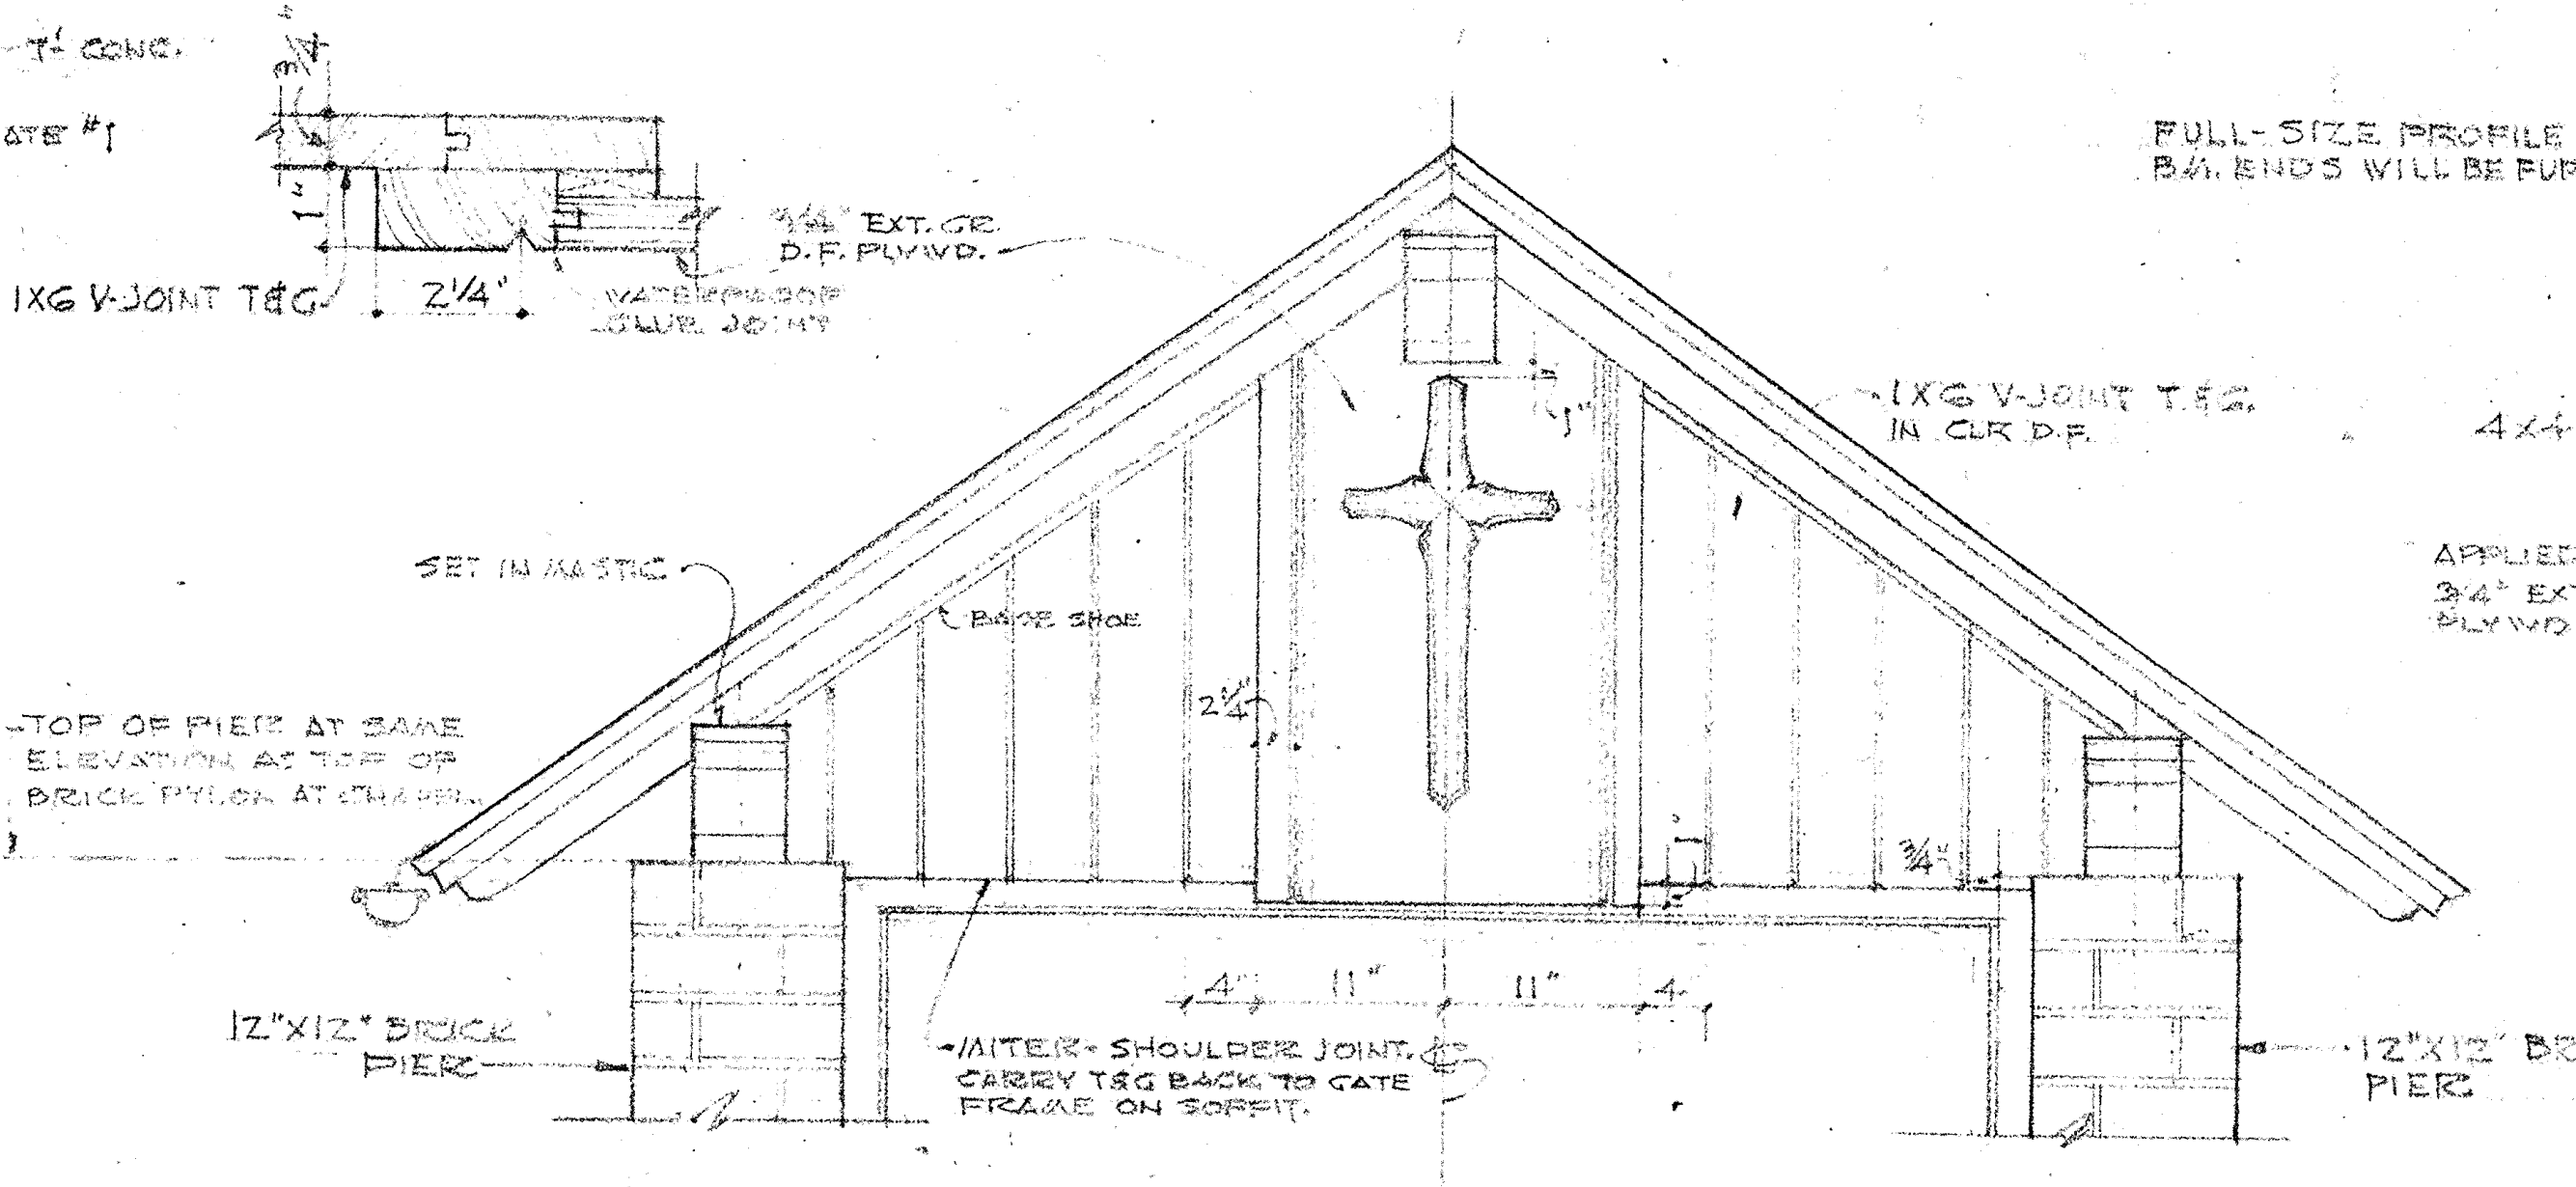
1X6 V-JOINT T&G IN CLR D.F.
SET IN MASTIC
TOP OF PIER AT SAME ELEVATION AS TOP OF BRICK PYLON AT CHAPEL
12"X12" BRICK PIER
MITER-SHOULDER JOINT. CARRY T&G BACK TO GATE FRAME ON SOFFIT.
12"X12" BRICK PIER

ELEVATION OF GABLE
SCALE: 3/4"=1'-0"

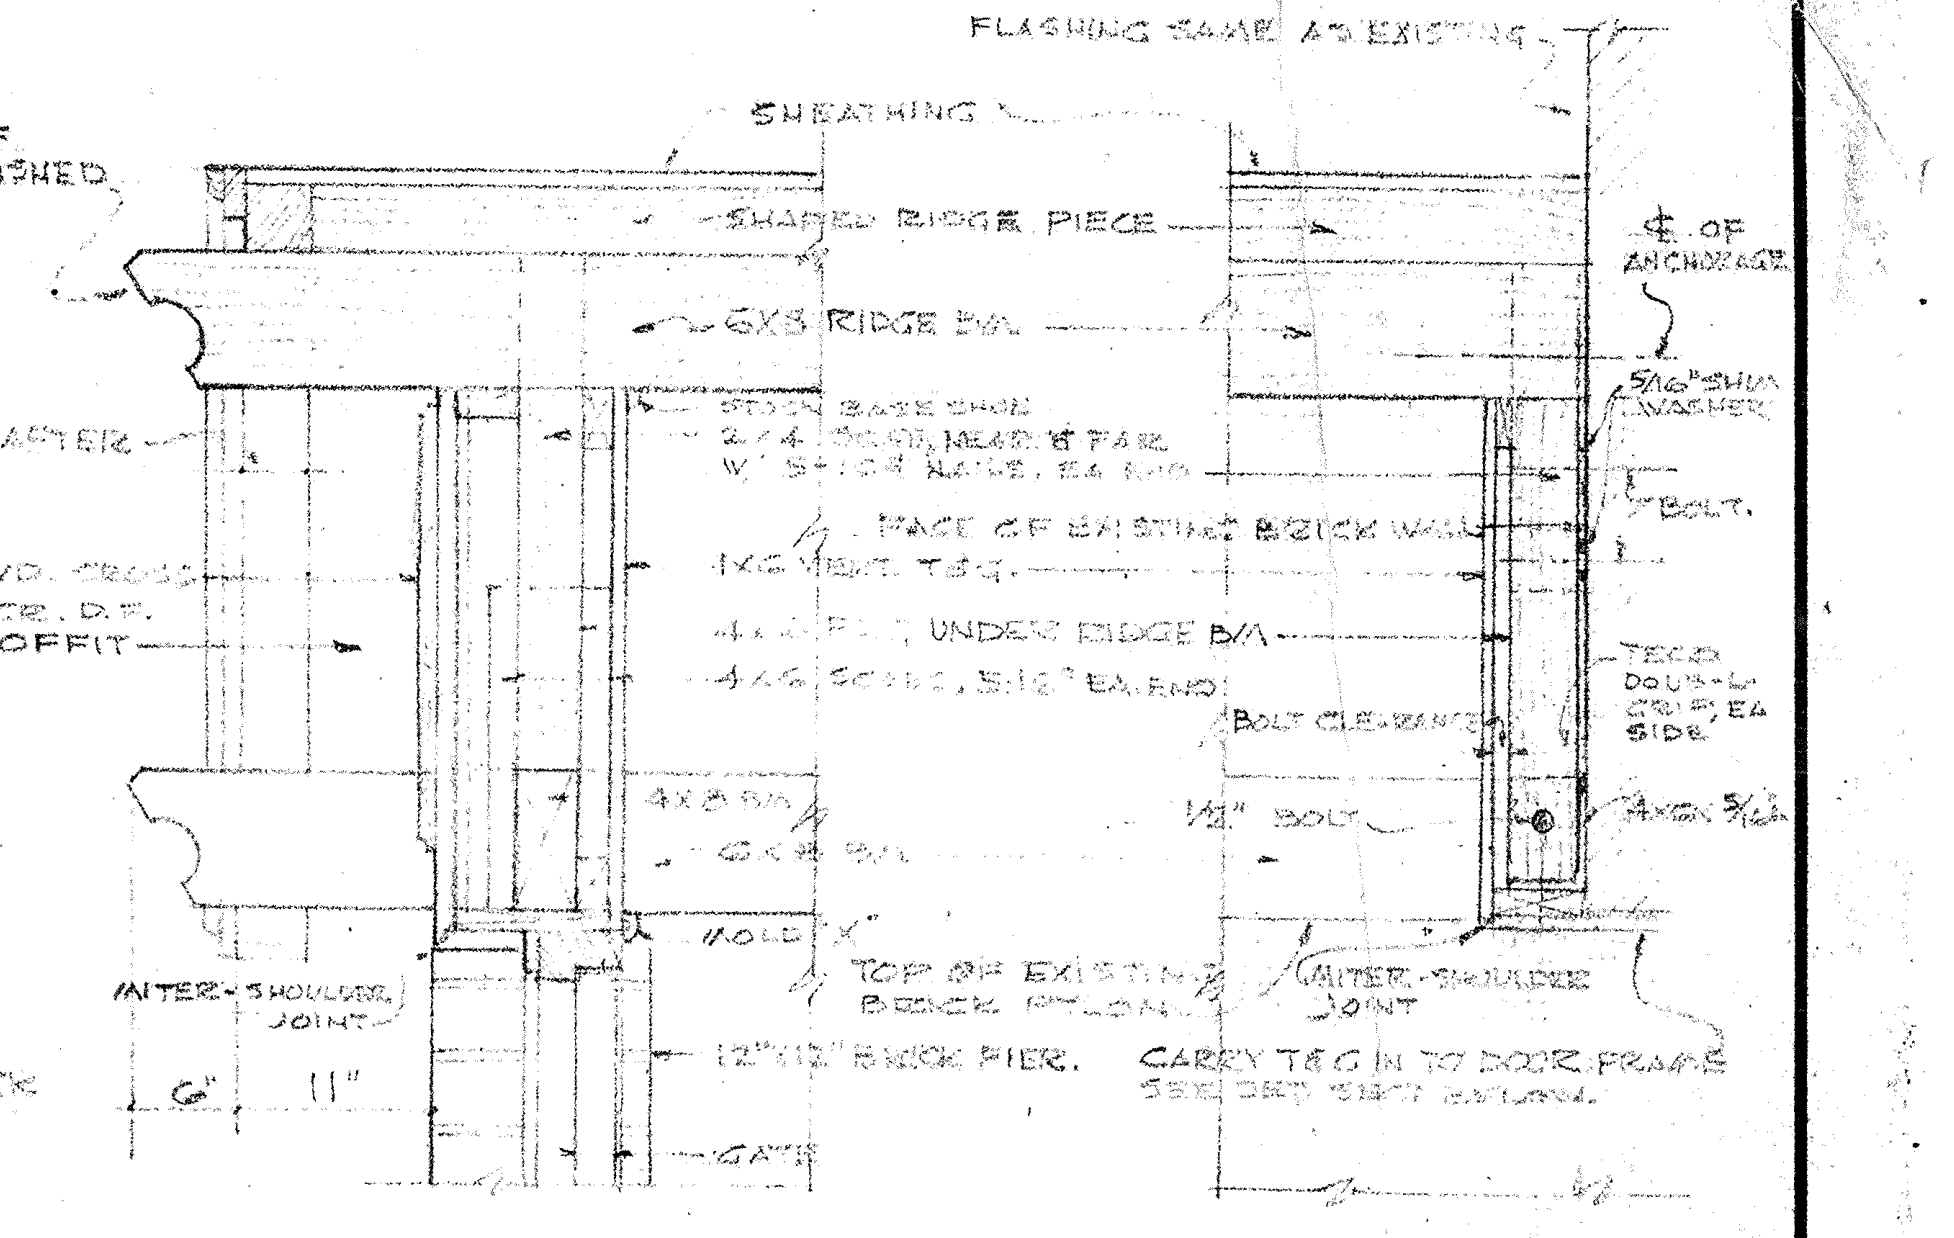
FULL-SIZE PROFILE OF B.M. ENDS WILL BE FURNISHED
SHEATHING
FLASHING SAME AS EXISTING
SHAPED RIDGE PIECE
4x4 RAFTER
MITER-SHOULDER JOINT
TOP OF EXISTING BRICK PYLON
12"X12" BRICK PIER.
MITER-SHOULDER JOINT
CARRY T&G IN TO DOOR FRAME

AT FRONT GABLE AT CHAPEL WALL
LONGITUDINAL SECTIONS ON ℄
SCALE: 3/4"=1'-0"

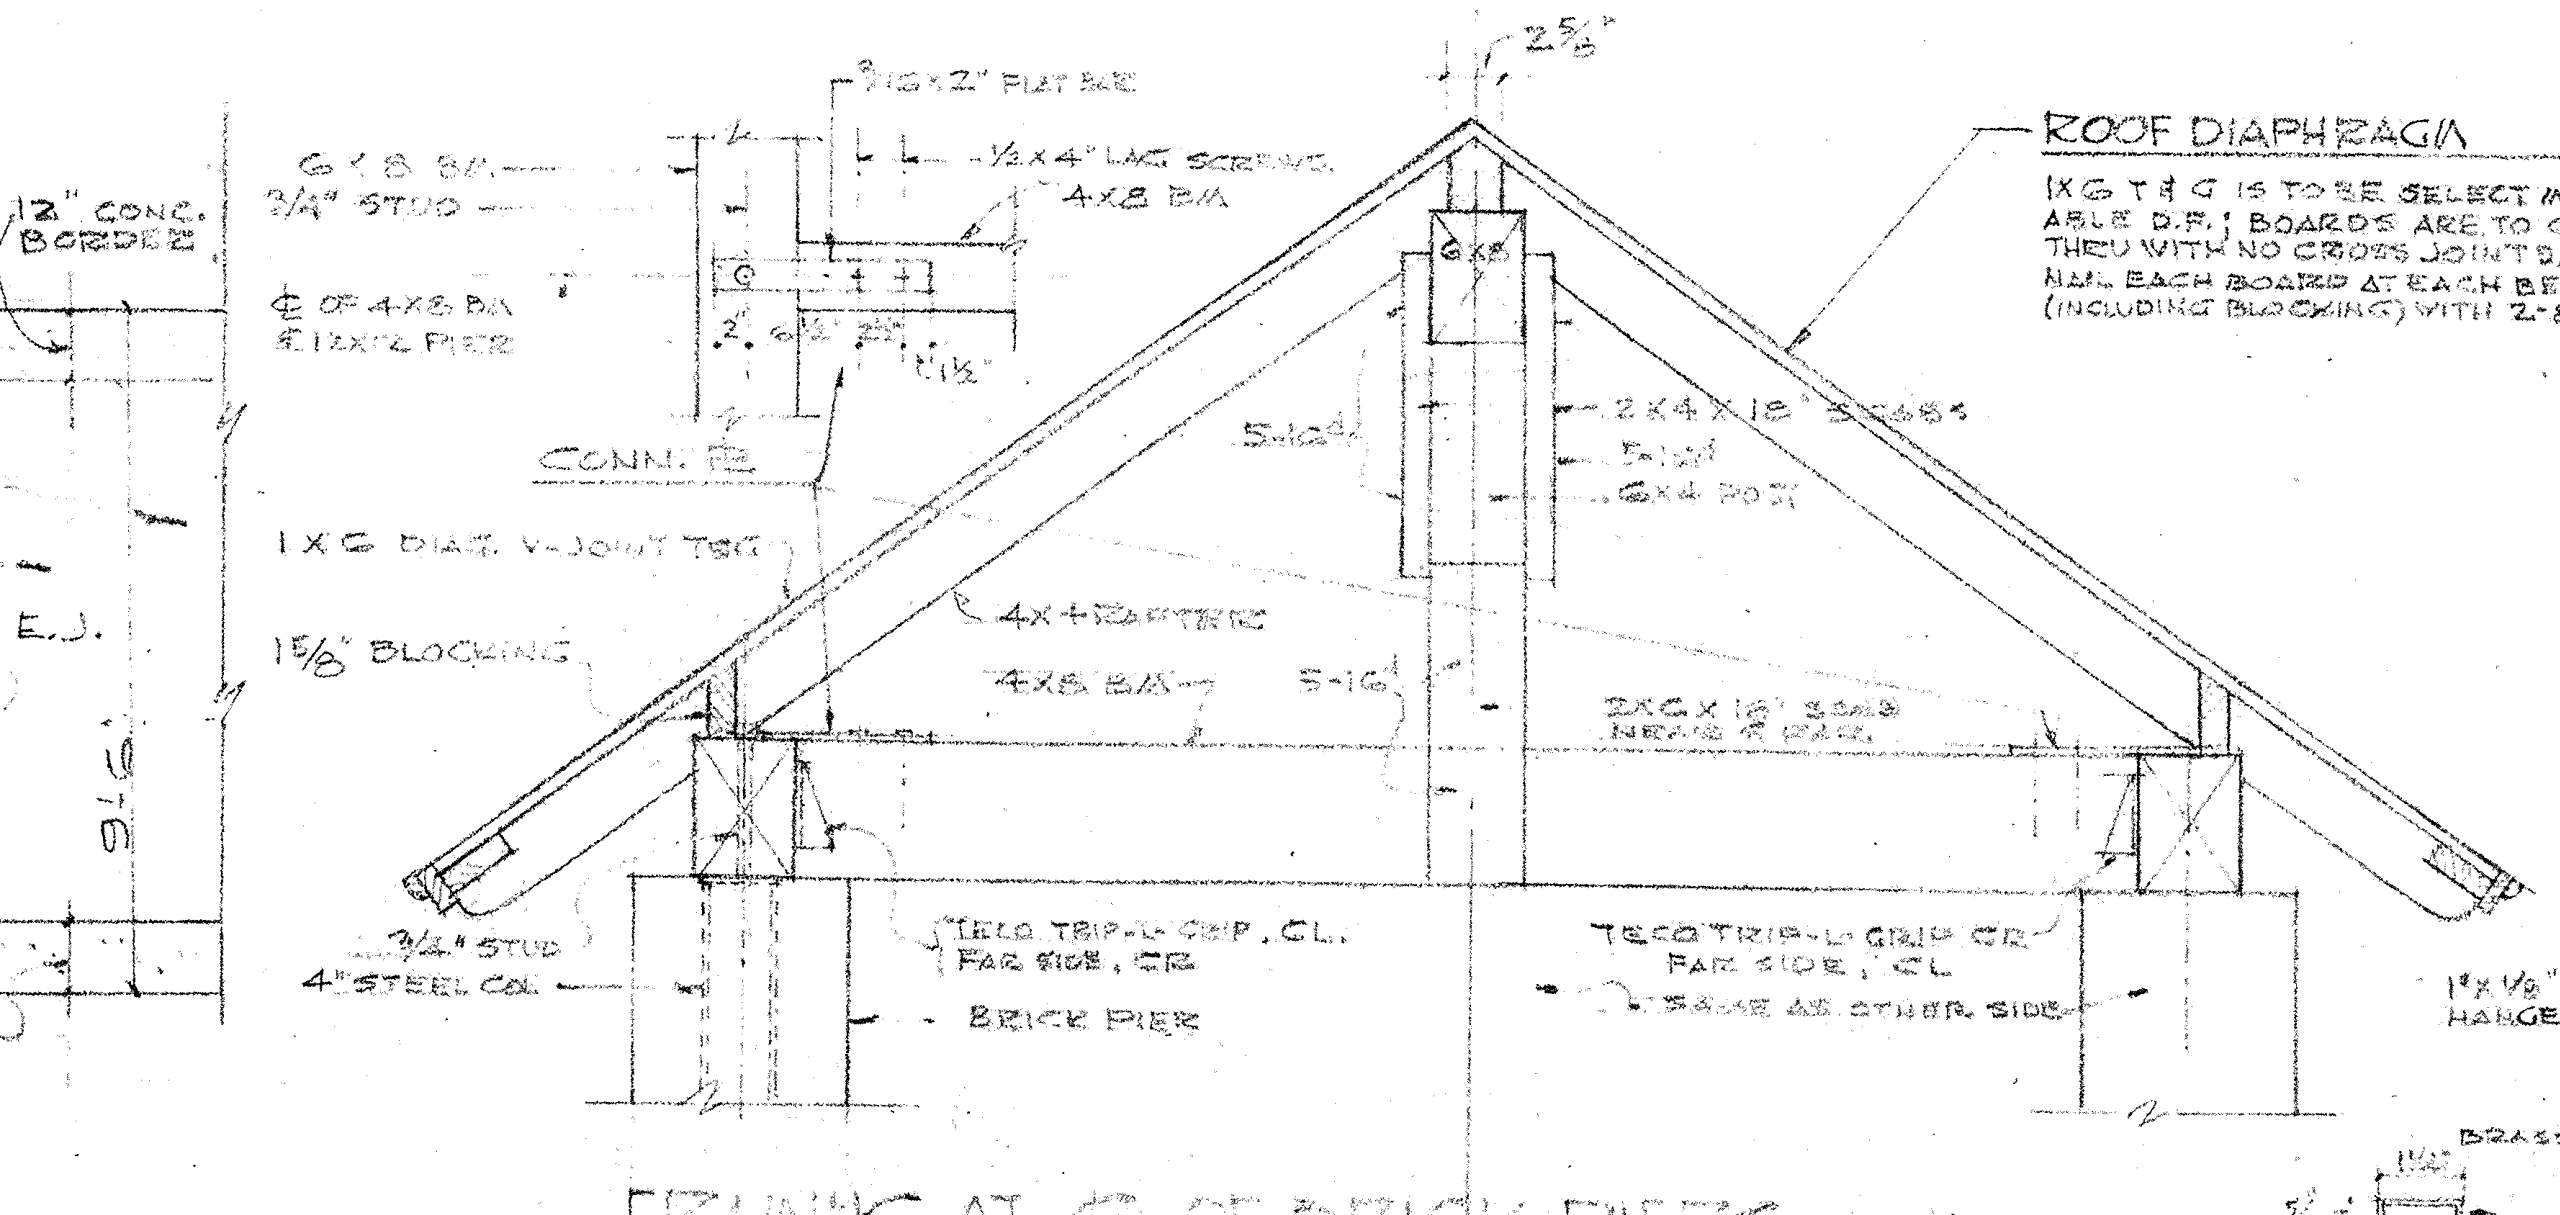
12" CONC. BORDER
6X8 B.M.
3/4" STUD
℄ OF 4X8 B.M. & 12X12 PIER
3/16X2" FLAT BAR
1/2X4" LAG SCREWS
4X8 B.M.
ROOF DIAPHRAGM
1X6 T&G IS TO BE SELECT MERCHANTABLE D.F.; BOARDS ARE TO CARRY THRU WITH NO CROSS JOINTS. NAIL EACH BOARD AT EACH BEARING (INCLUDING BLOCKING) WITH 2-8d.
1X6 DIAG. V-JOINT T&G
1 5/8" BLOCKING
3/4" STUD
4" STEEL COL.
TECO TRIP-L-GRIP, CL. FAR SIDE, CR
BRICK PIER
TECO TRIP-L-GRIP CR. FAR SIDE, CL
SAME AS OTHER SIDE

FRAMING AT ℄ OF BRICK PIERS
SCALE: 3/4"=1'-0"

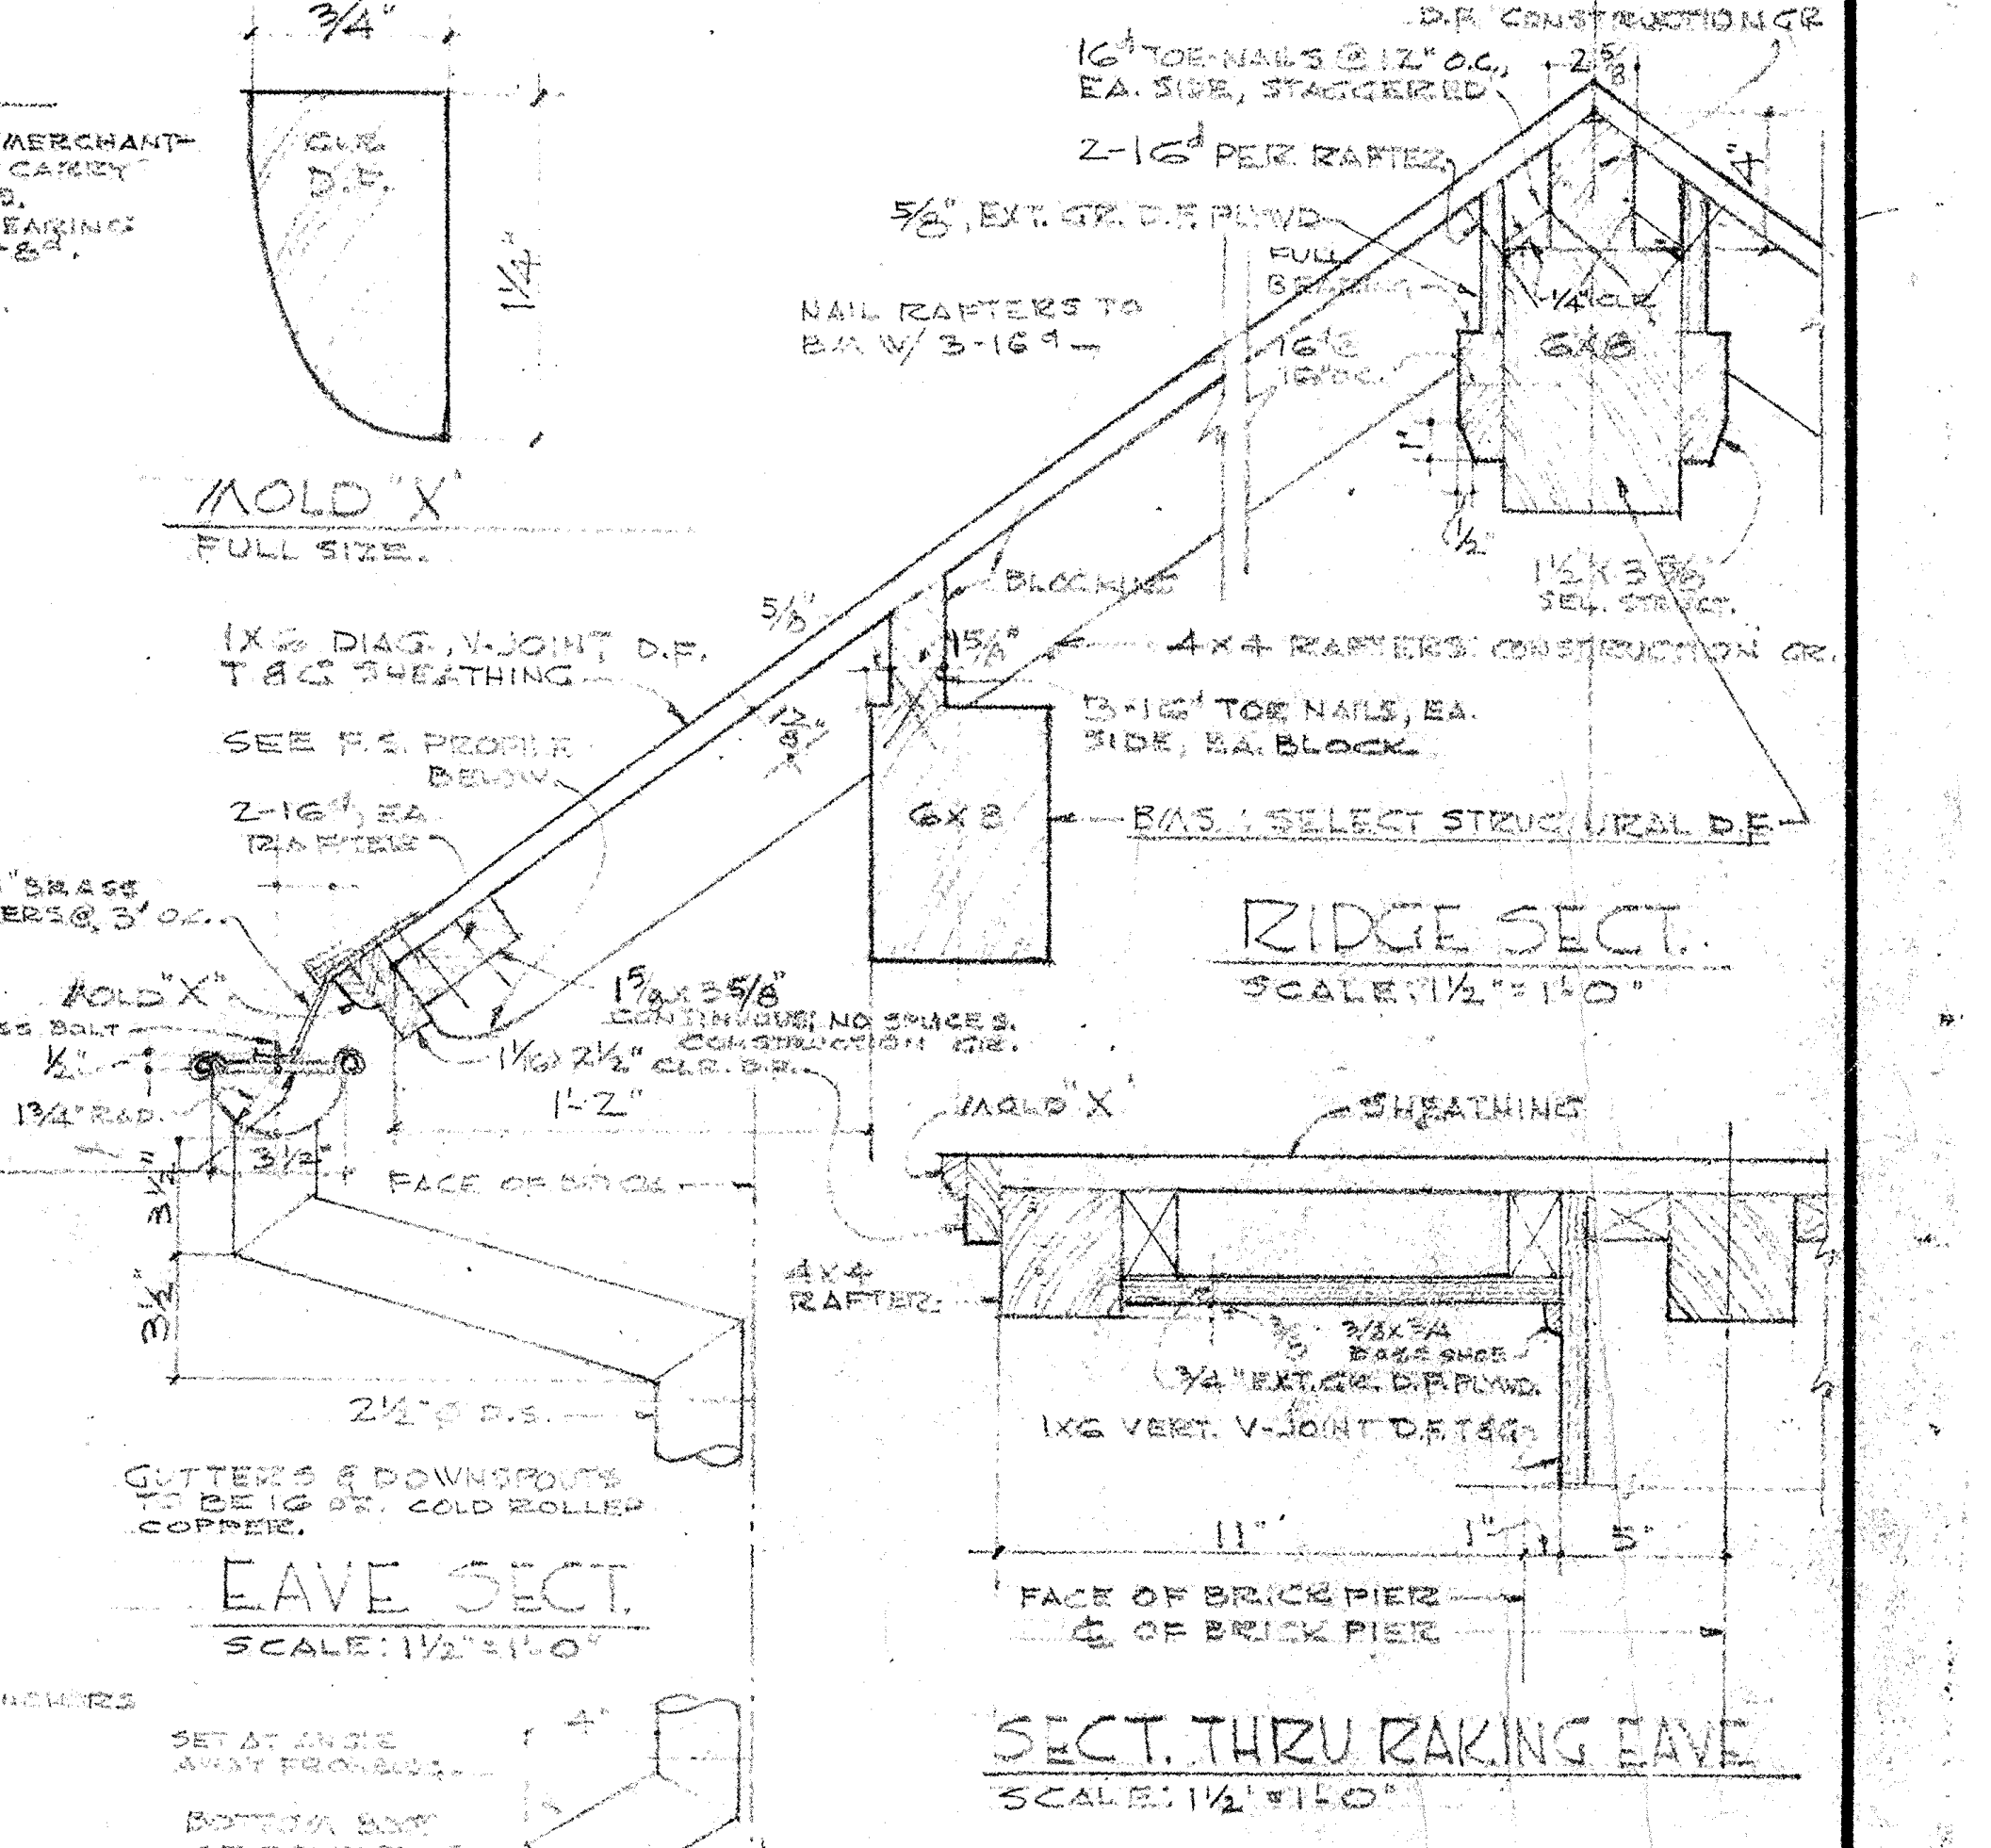
3/4"
CLR D.F.
1¼"
D.F. CONSTRUCTION GR
16d TOE-NAILS @ 12" O.C. EA. SIDE, STAGGERED
2-16d PER RAFTER
5/8" EXT. GR. D.F. PLYWD.
NAIL RAFTERS TO B.M. W/ 3-16d
1X6 DIAG. V-JOINT D.F. T&G SHEATHING
SEE F.S. PROFILE BELOW
2-16d EA. RAFTER
3-16d TOE NAILS, EA. SIDE, EA. BLOCK
B.M.S.: SELECT STRUCTURAL D.F.
1"x1/8" BRASS HANGERS @ 3' O.C.
MOLD "X"
BRASS BOLT
1 5/8x3 5/8 CONTINUOUS, NO SPLICES. CONSTRUCTION GR.
1 3/4" RAD.
32 OZ. C.R. COPPER
FACE OF PITCH
2½" D.S.
GUTTERS & DOWNSPOUTS TO BE 16 OZ. COLD ROLLED COPPER.
MOLD "X"
SHEATHING
4x4 RAFTER
3/4" EXT. GR. D.F. PLYWD.
1X6 VERT. V-JOINT D.F. T&G
FACE OF BRICK PIER
℄ OF BRICK PIER
SET AT ANGLE AWAY FROM BLDG.
BOTTOM BOOT OF DOWNSPOUT
FIN. GRADE

MOLD "X"
FULL SIZE

RIDGE SECT.
SCALE: 1½"=1'-0"

EAVE SECT.
SCALE: 1½"=1'-0"

SECT. THRU RAKING EAVE
SCALE: 1½"=1'-0"

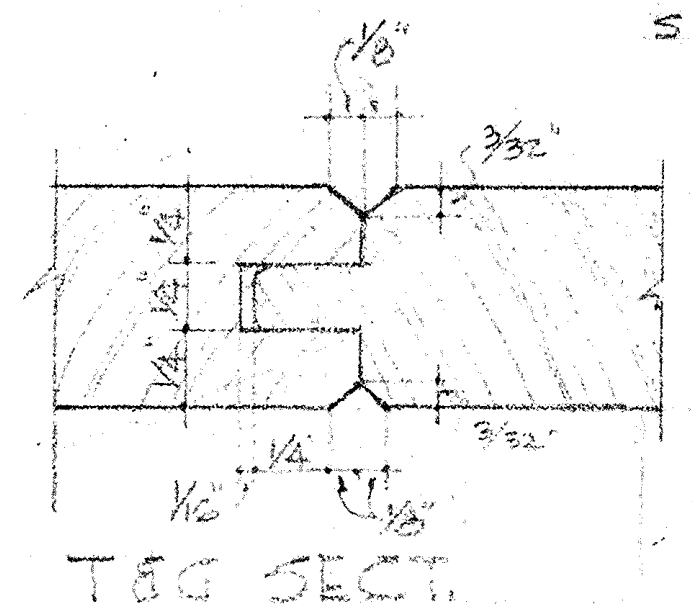

T&G SECT.
FULL SIZE
V-JOINT EA. SIDE FOR GATES; REST, ONE SIDE ONLY.

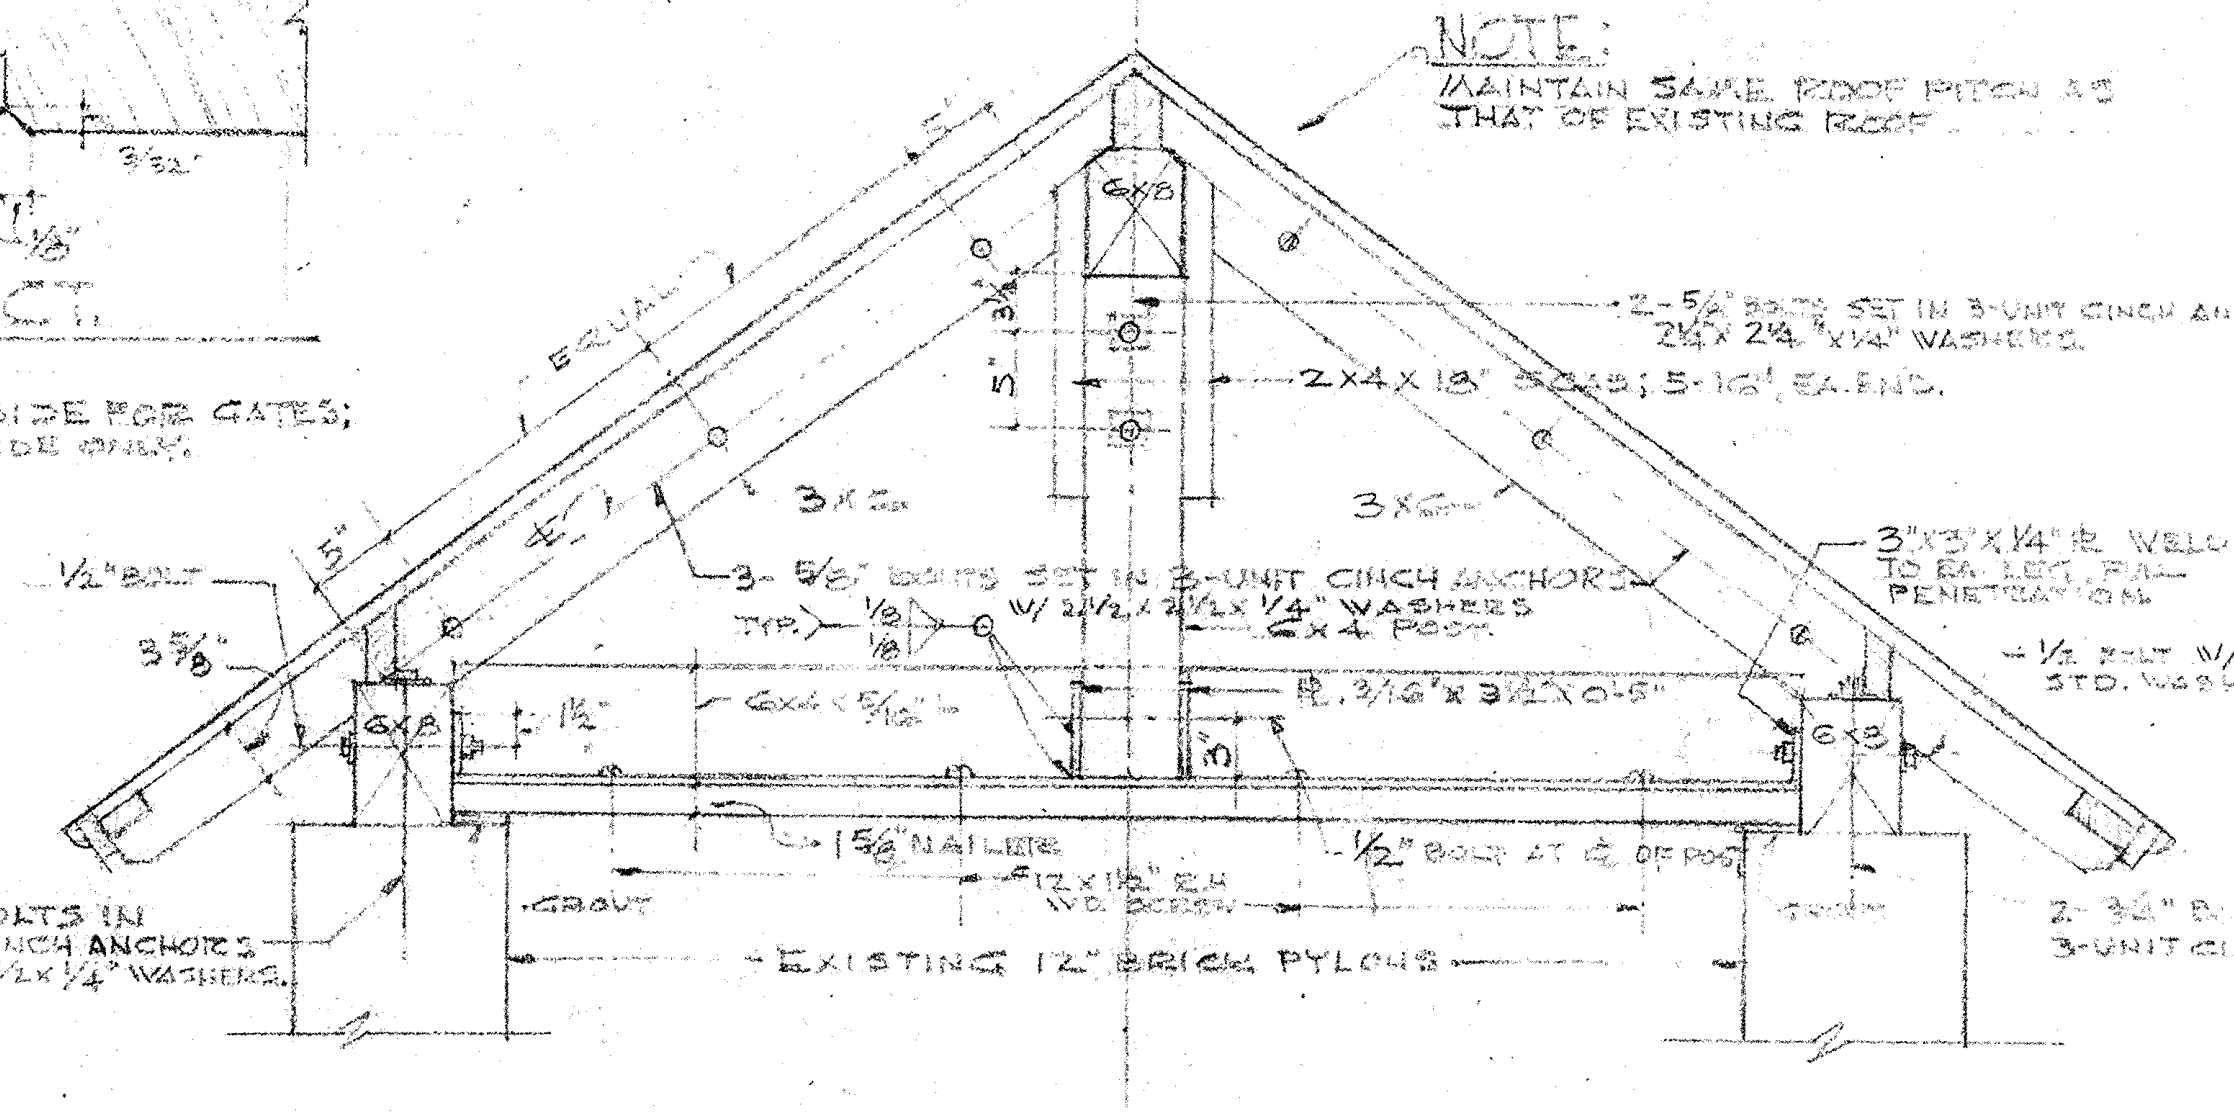
NOTE:
MAINTAIN SAME ROOF PITCH AS THAT OF EXISTING ROOF
EQUAL
6X8
2-5/8" BOLTS SET IN 3-UNIT CINCH ANCHORS 2¼X2¼"X¼" WASHERS
2X4 X 18" SCABS; 5-16d EA. END.
3X6
3-5/8" BOLTS SET IN 3-UNIT CINCH ANCHORS W/ 2½X2½X¼" WASHERS
6X4 POST
3"X3"X¼" PL. WELD TO EA. LEG, FULL PENETRATION
½" BOLT W/ AISC'S STD. WASHER, EA. END.
½" BOLT
PL. 3/16"X3½"X0'-5"
1 5/8" NAILER
12X1/2" F.H. WD. SCREW
½" BOLT AT ℄ OF POST
GROUT
EXISTING 12" BRICK PYLONS
2-3/4" BOLTS IN 3-UNIT CINCH ANCHORS W/ 2¼X2½X¼" WASHERS.

FRAMING AT FACE OF CHAPEL WALL
SCALE: 3/4"=1'-0"

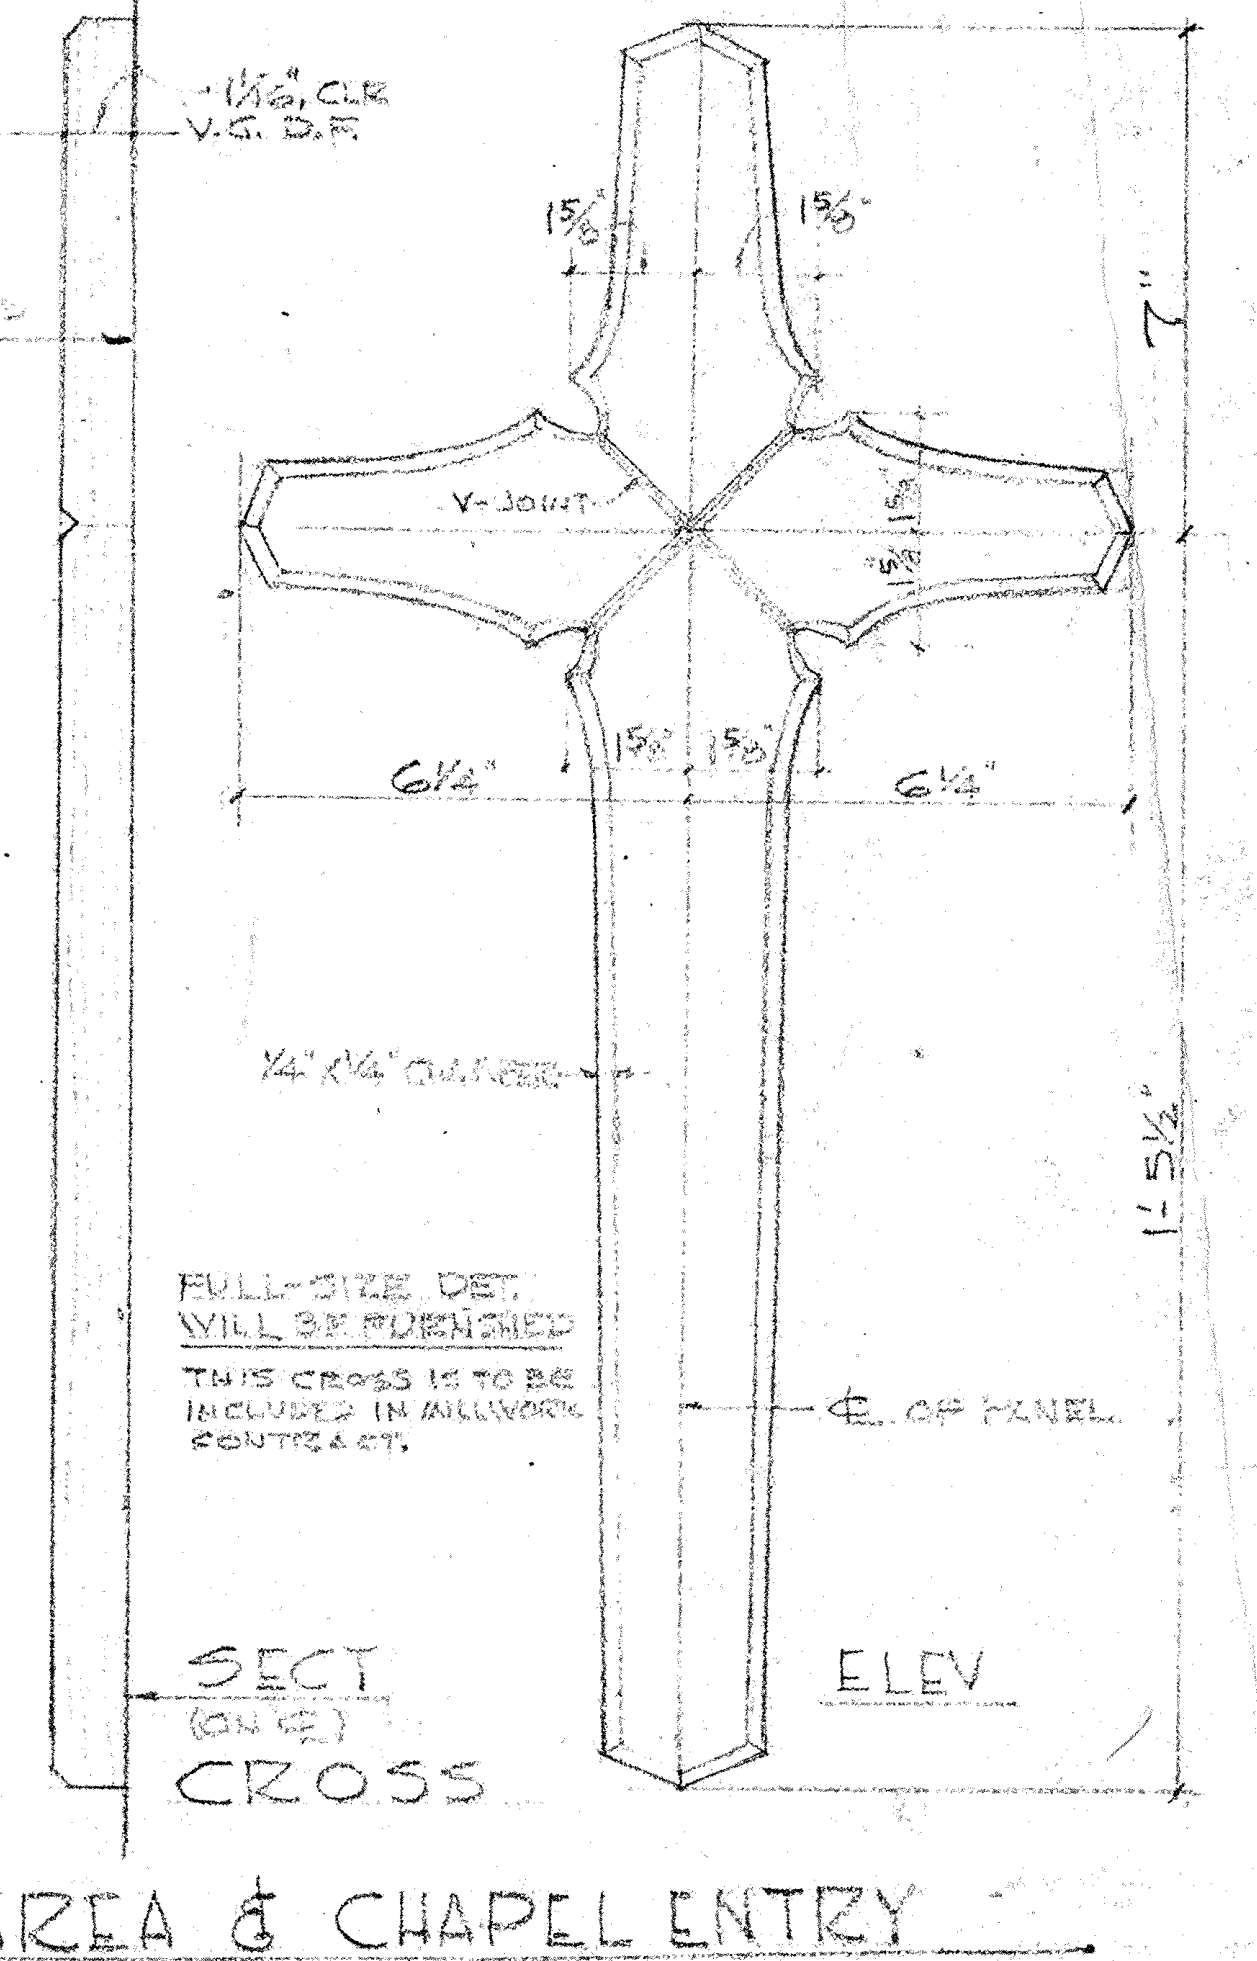
1 1/16" CLR V.G. D.F.
FACE OF PLYWD PANEL
V-JOINT
1 5/8"
6¼"
FULL-SIZE DET. WILL BE FURNISHED
THIS CROSS IS TO BE INCLUDED IN MILLWORK CONTRACT.
℄ OF PANEL

SECT. (ON ℄) CROSS ELEV.

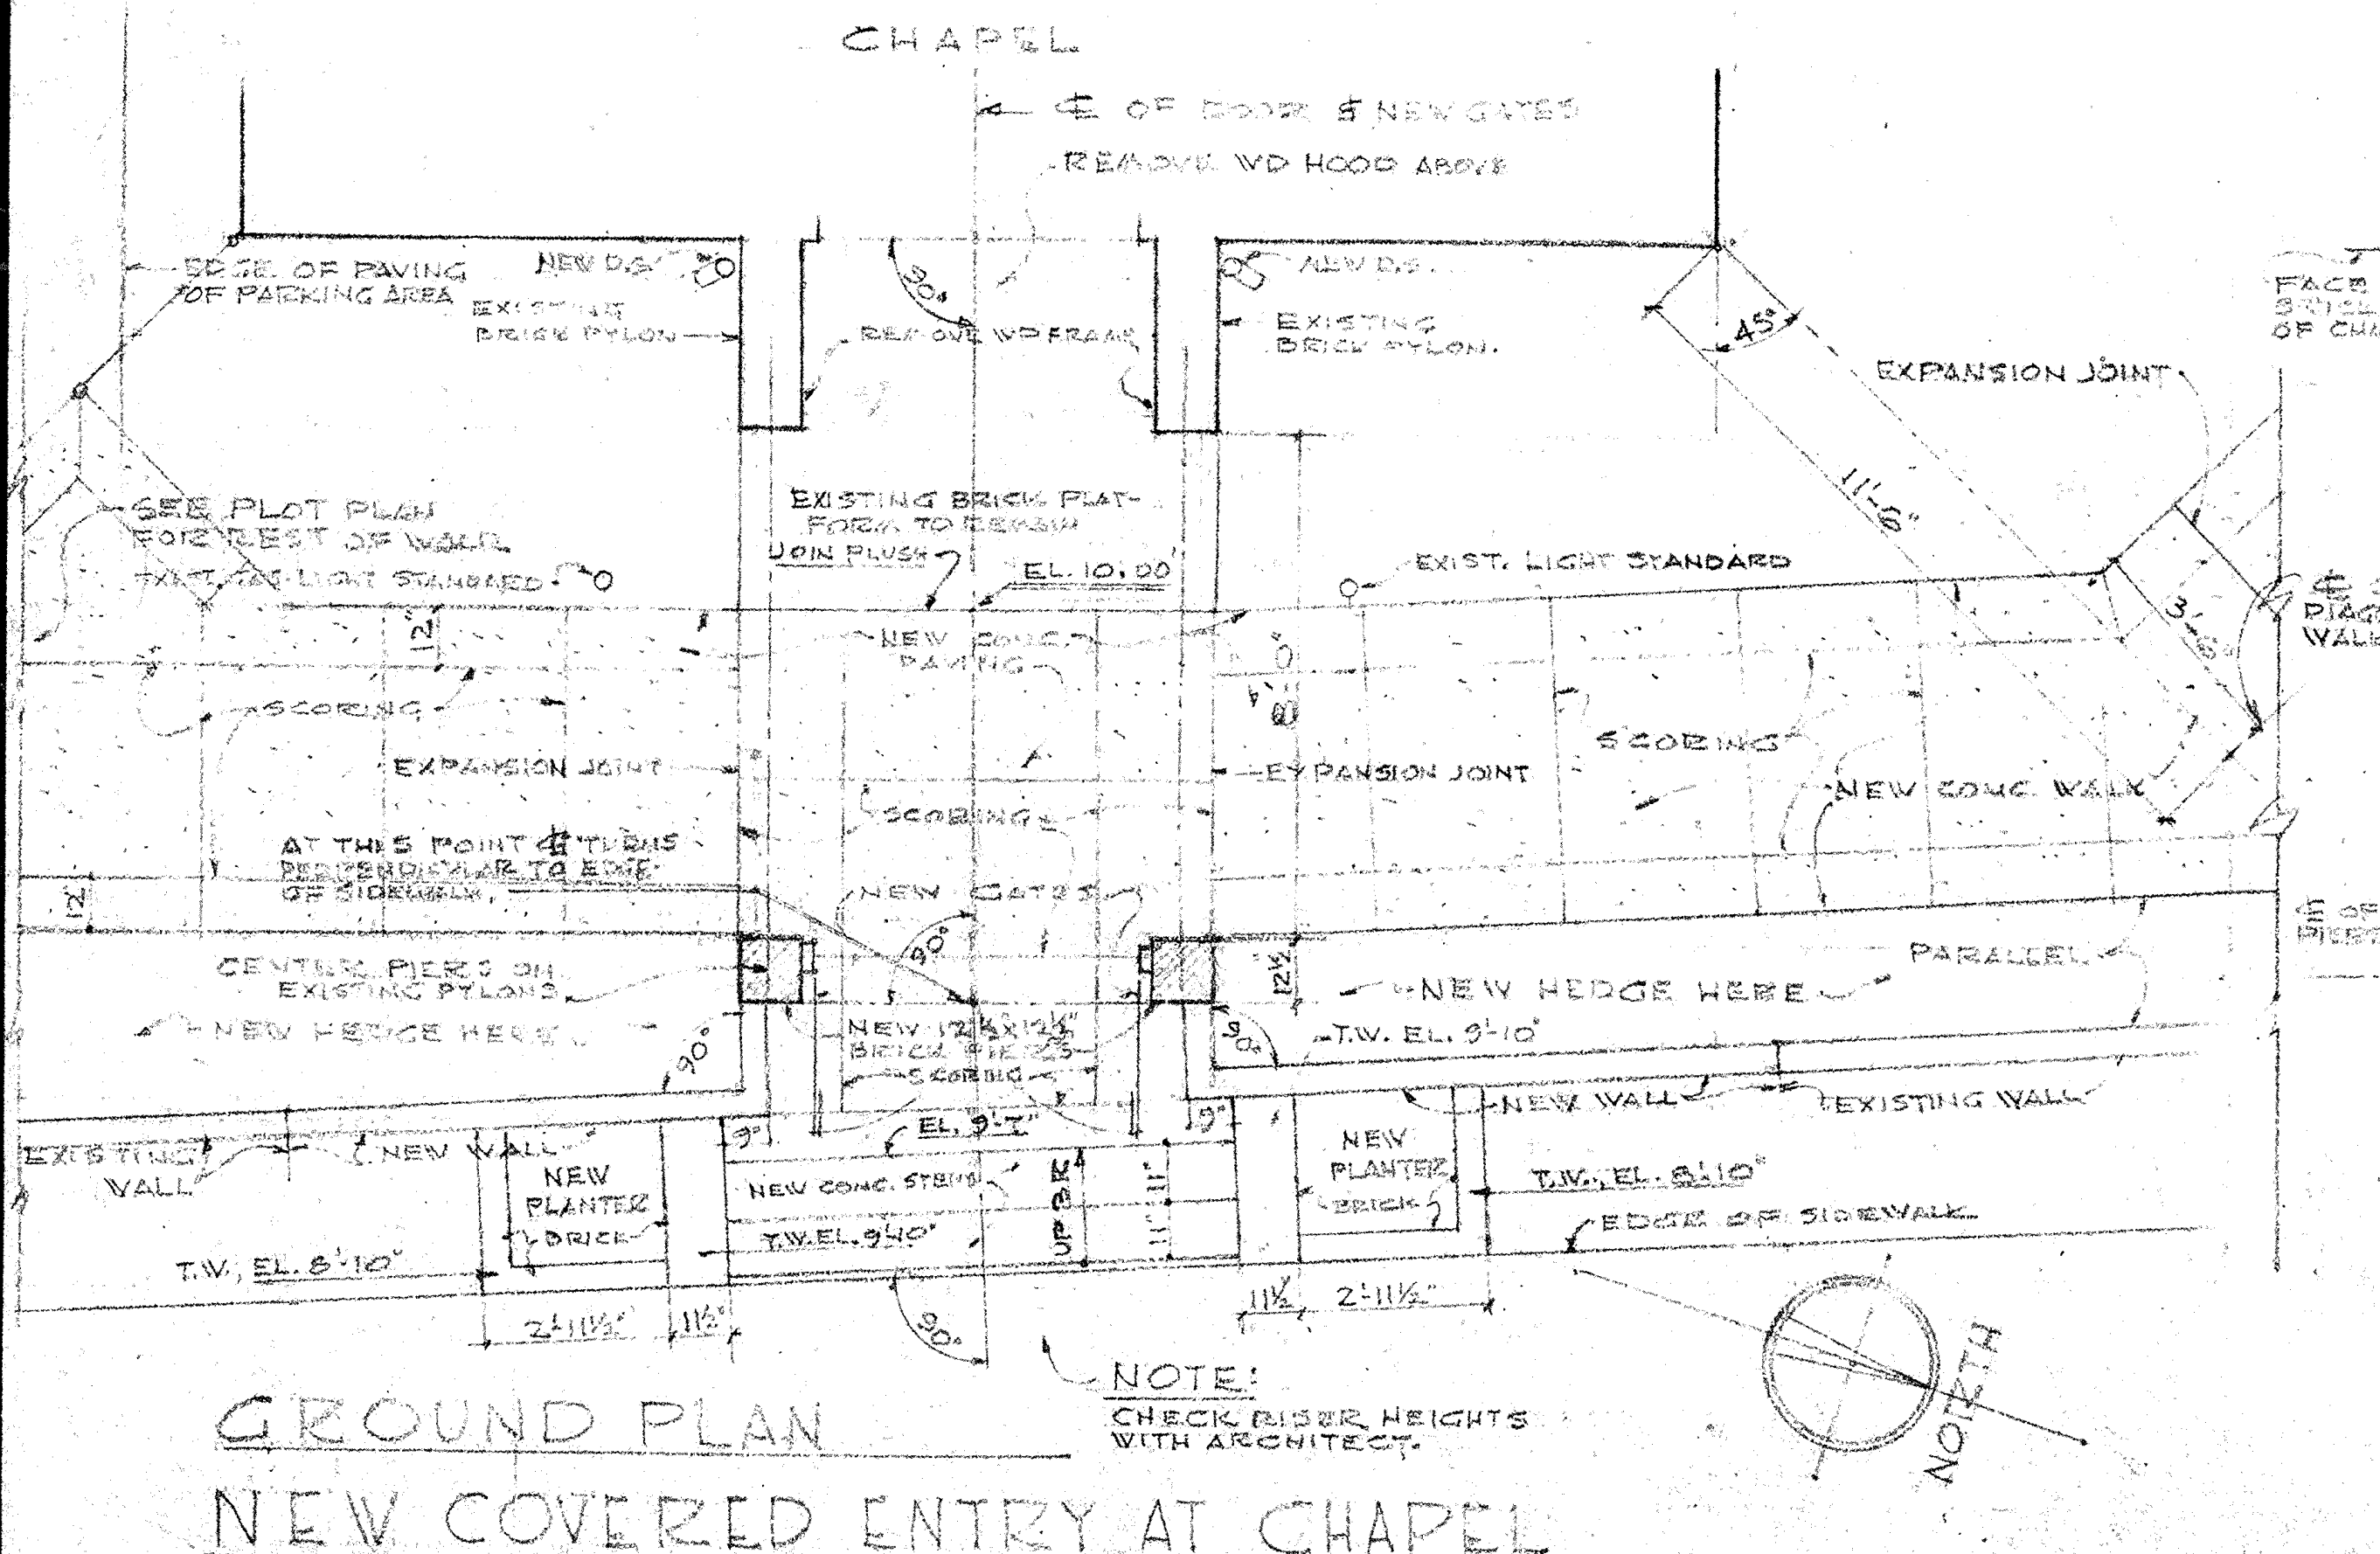

NOTE:
CHECK RISER HEIGHTS WITH ARCHITECT.

GROUND PLAN
NEW COVERED ENTRY AT CHAPEL
SCALE: 1/4"=1'-0"

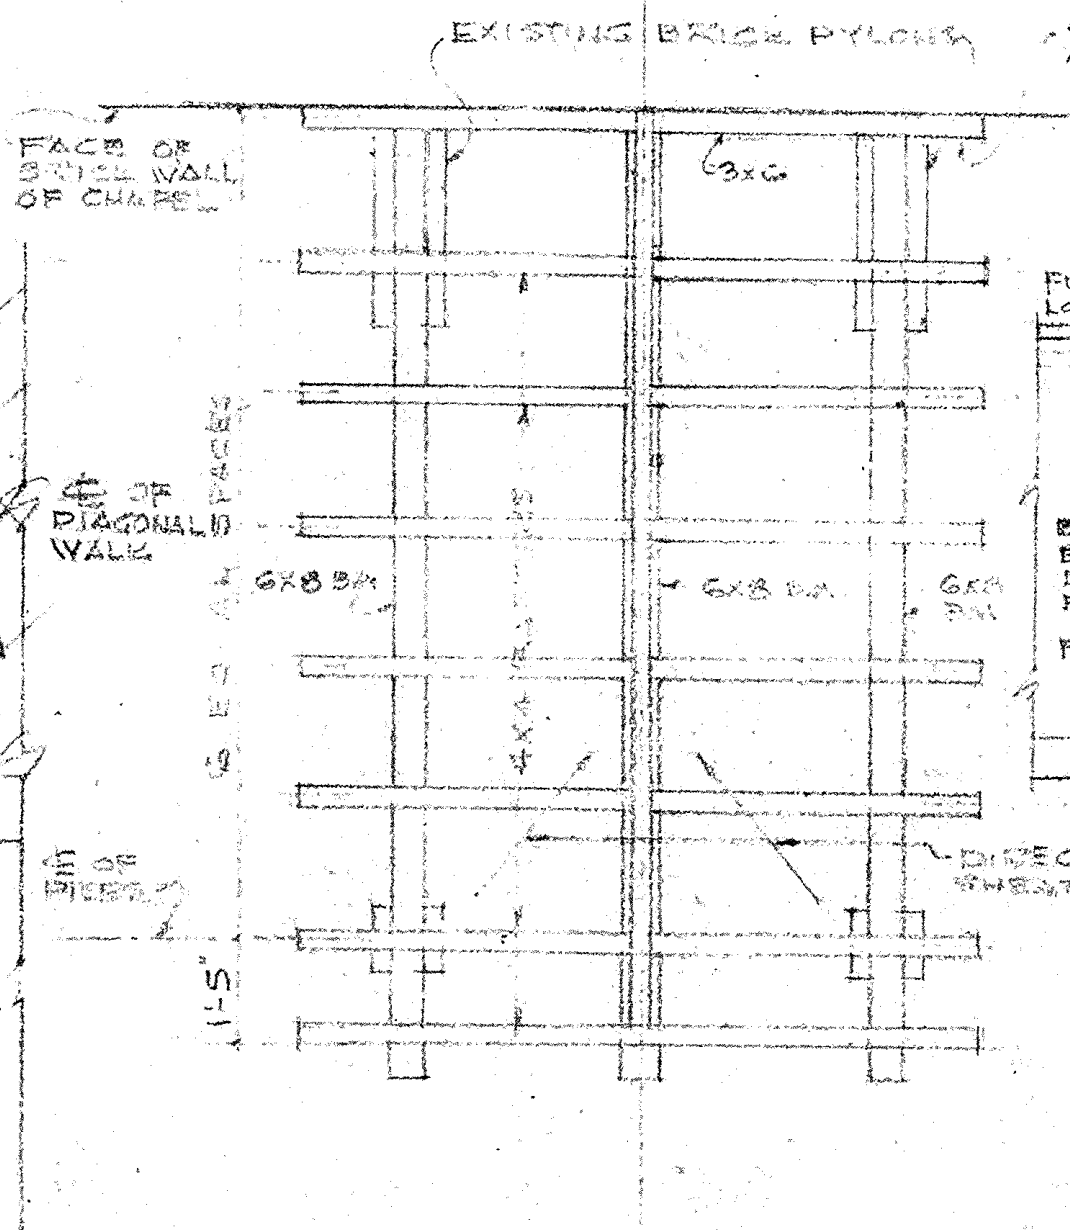

ROOF FRAMING PLAN

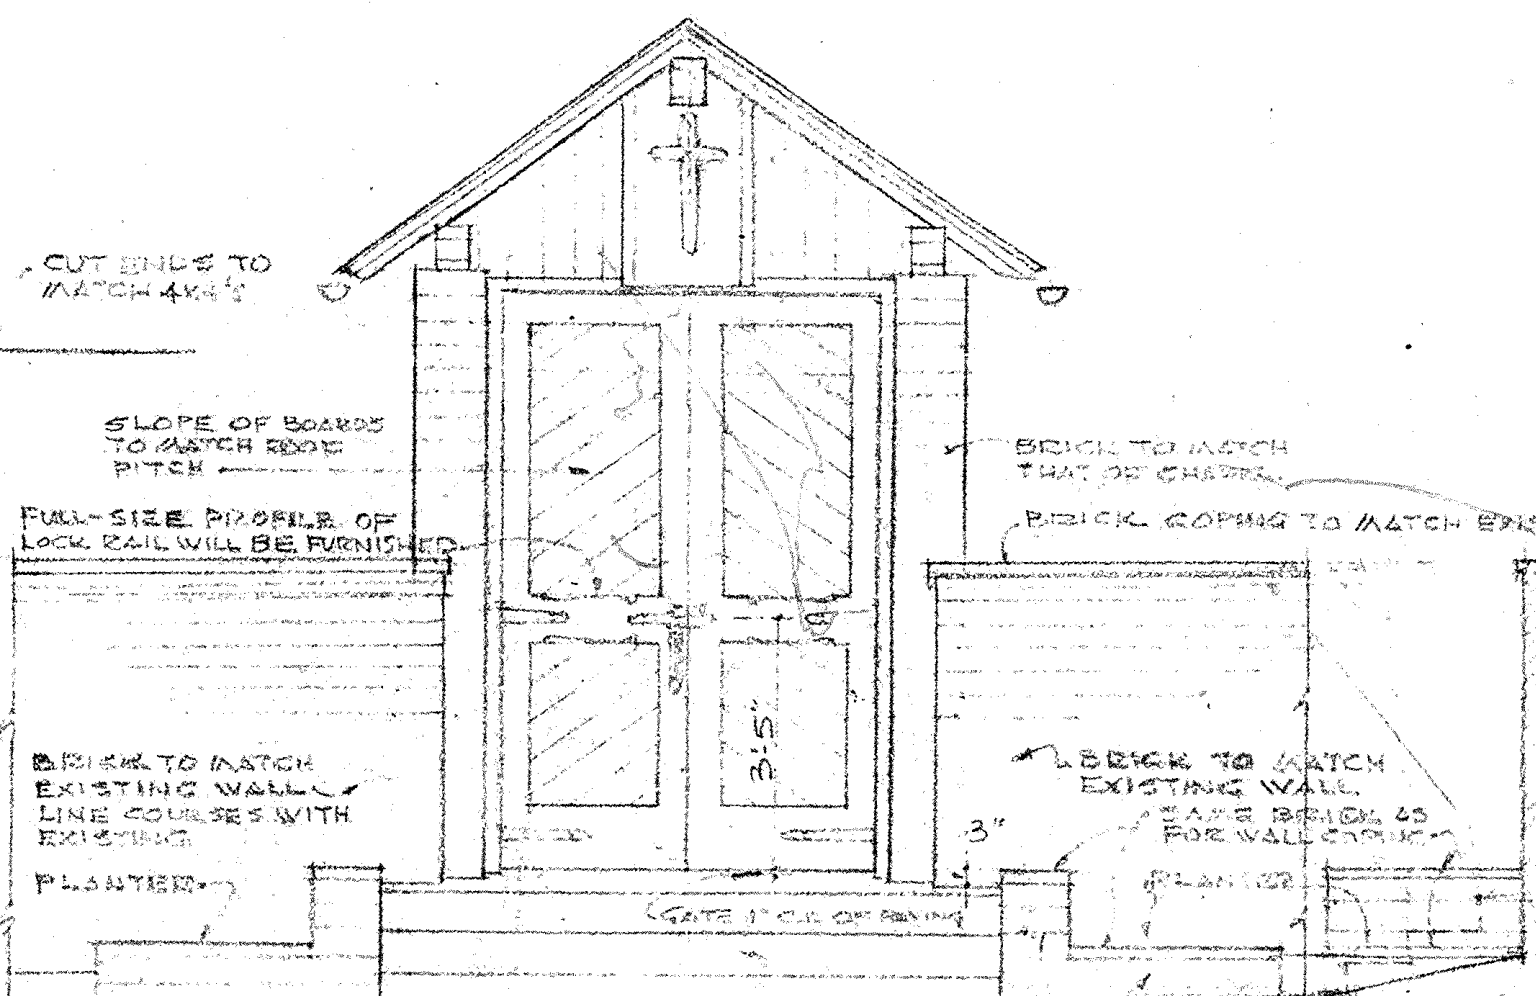
CUT SIDES TO MATCH ANGLE
SLOPE OF BOARDS TO MATCH ROOF PITCH
FULL-SIZE PROFILE OF LOCK RAIL WILL BE FURNISHED
BRICK TO MATCH EXISTING WALL
BRICK COPING TO MATCH EXISTING
BRICK TO MATCH EXISTING WALL
CONC. STEPS
SAME BRICK AS FOR WALL

EAST ELEVATION

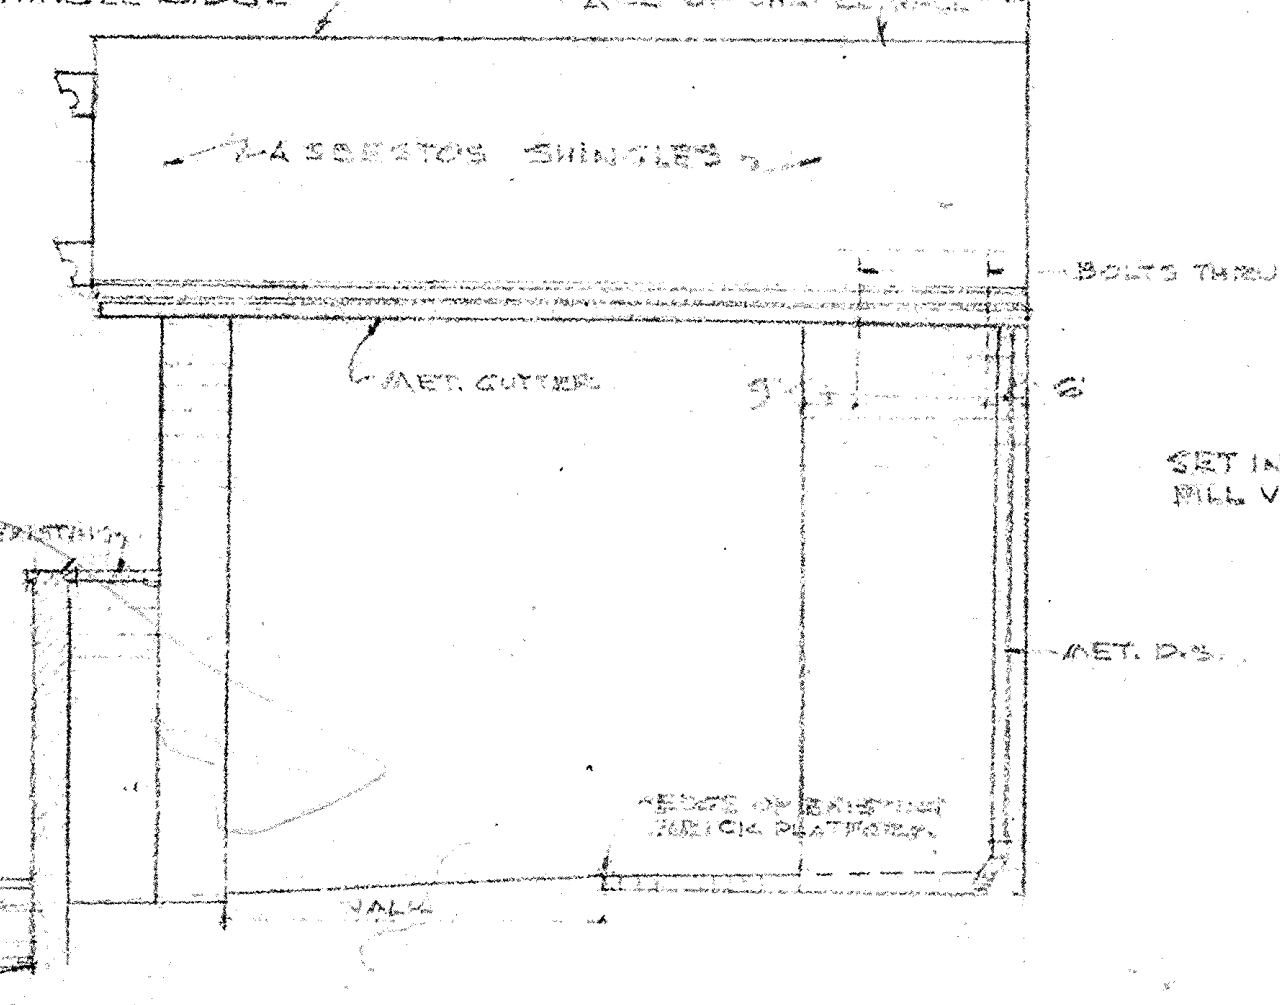

NORTH ELEVATION

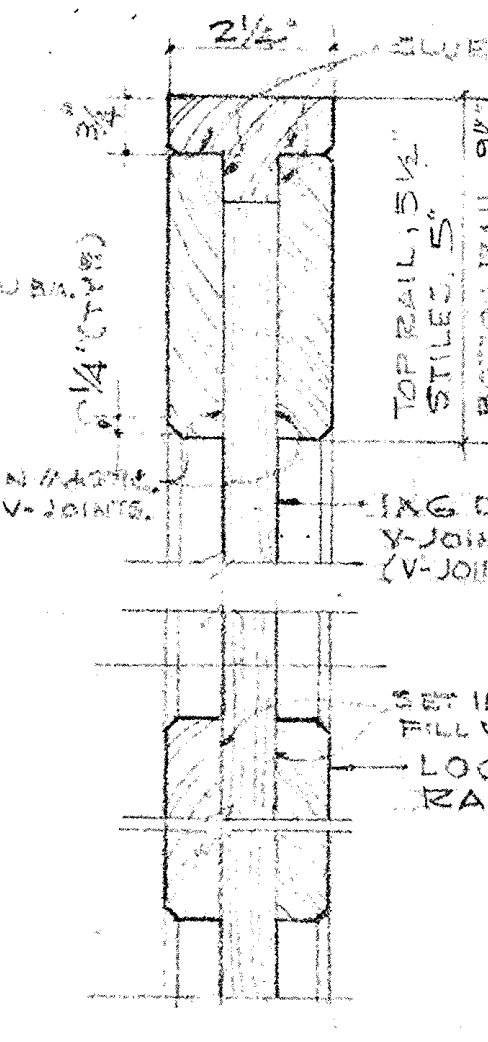
2¼"
GLUE
TOP RAIL 5¼"
STILES 5"
BOTTOM RAIL 9½"
SET IN MASTIC, FILL V-JOINTS
1X6 DIAG. V-JOINT T&G (V-JOINT EA. SIDE)
SET IN MASTIC, FILL V-JOINTS
LOCK RAIL

GATE SECT.
SCALE: 3"=1'-0"
ALL IN CLR. D.F.

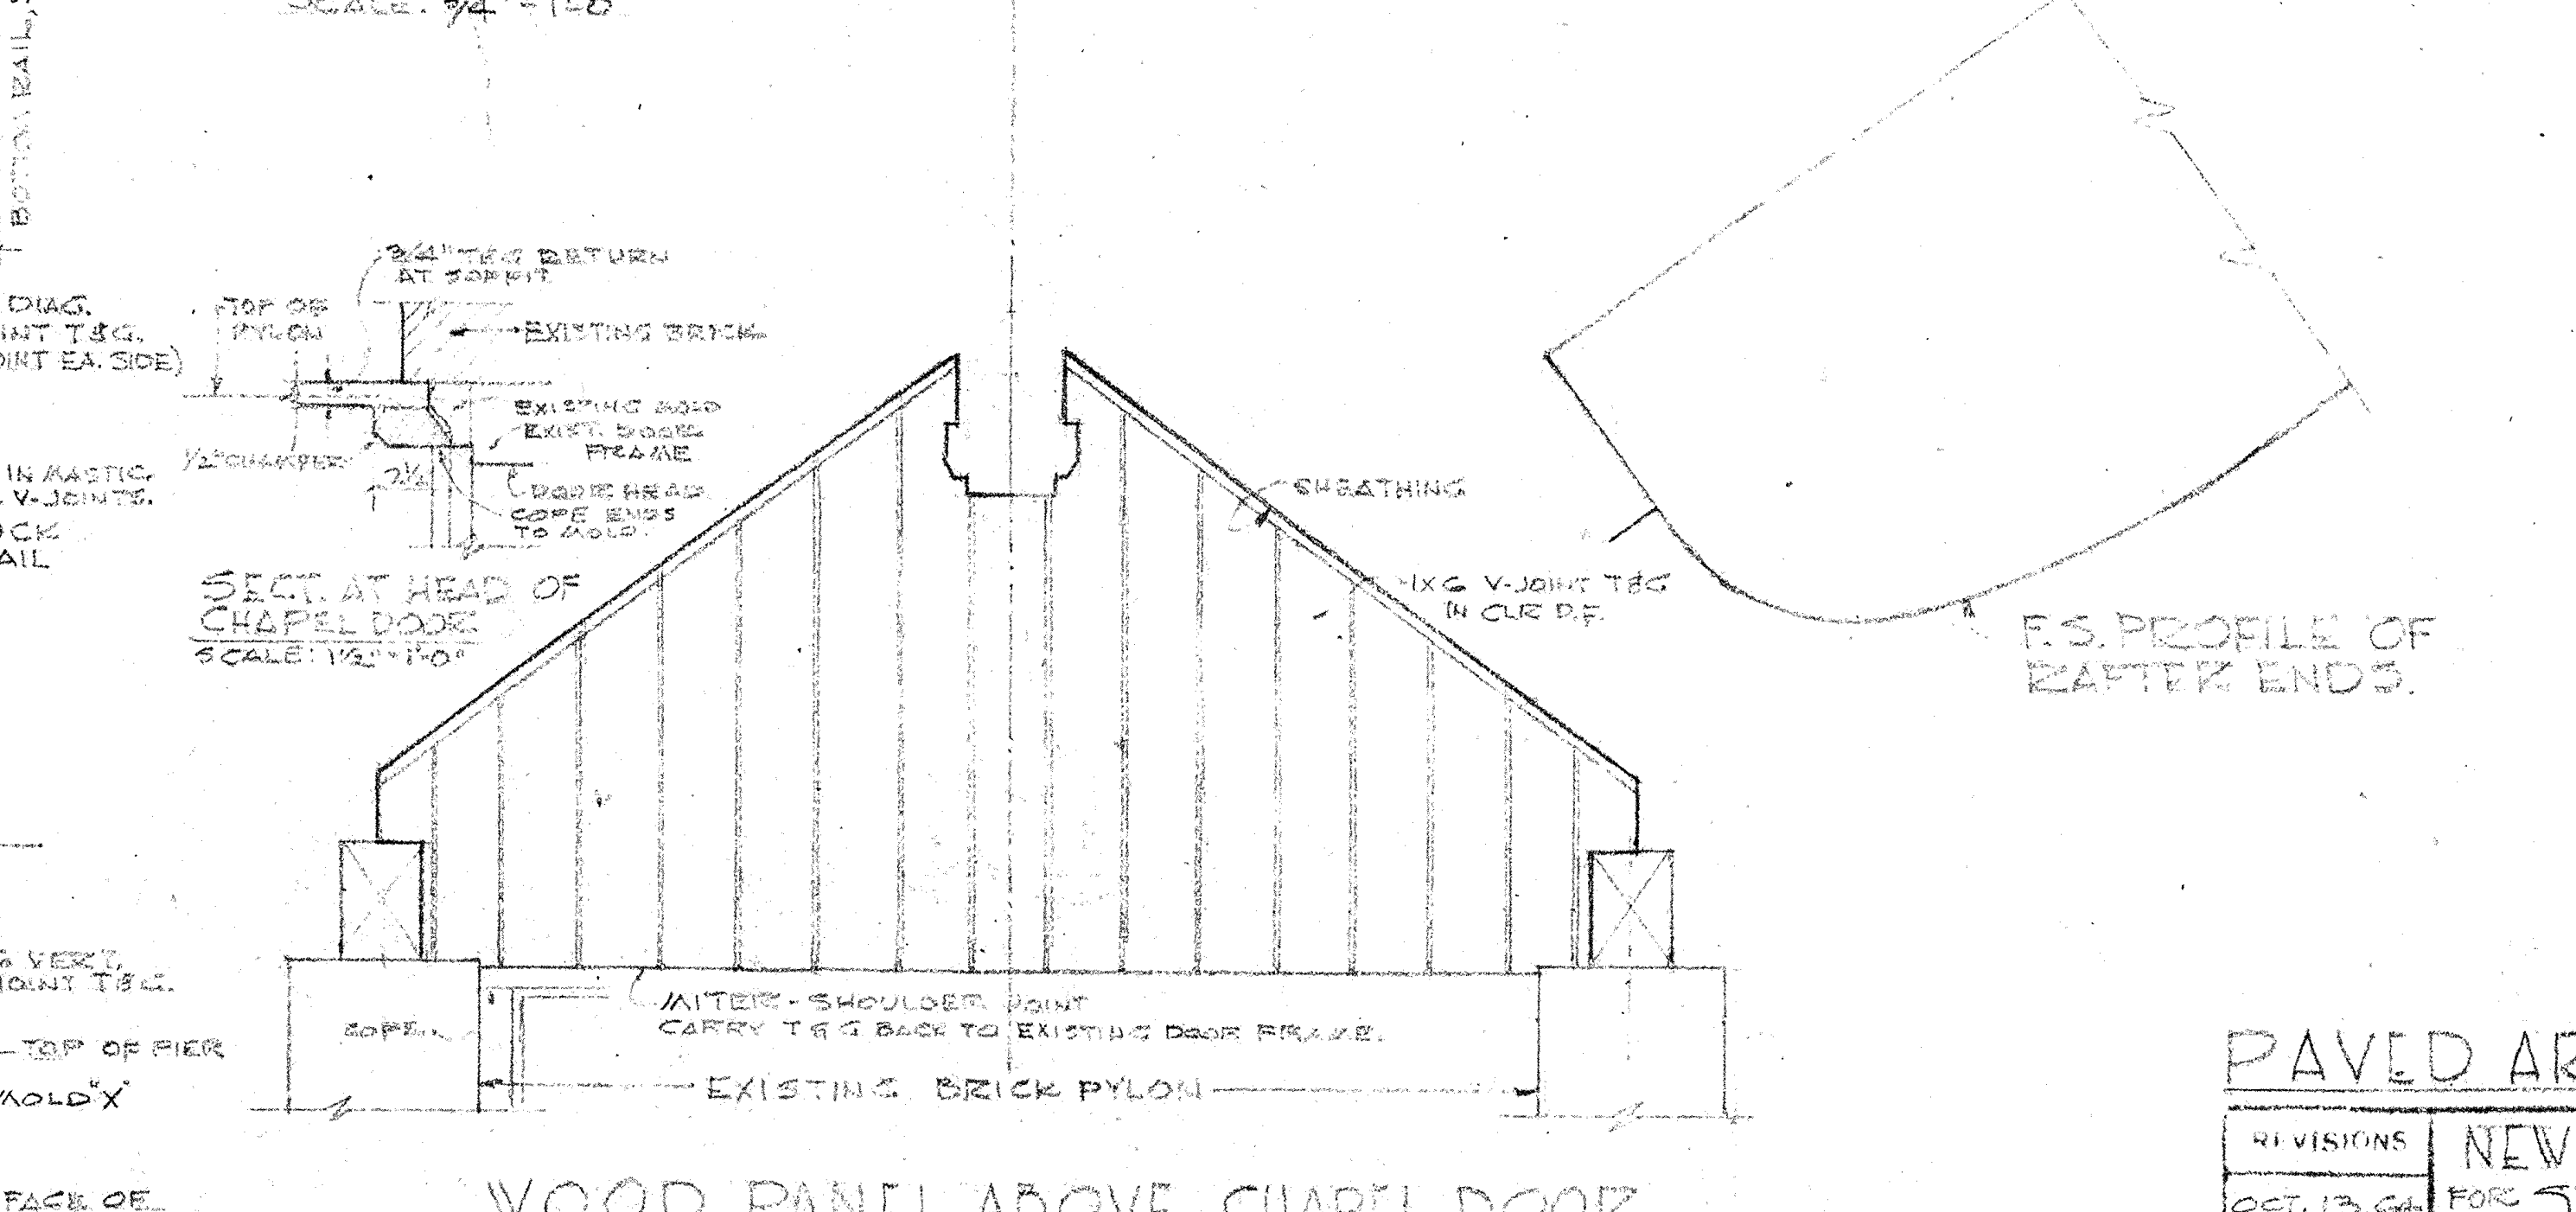
3/4" T&G RETURN AT SOFFIT
TOP OF PYLON
EXISTING BRICK
EXISTING AND NEW DOOR FRAME
SHEATHING
1X6 V-JOINT T&G IN CLR D.F.
MITER-SHOULDER JOINT CARRY T&G BACK TO EXISTING DOOR FRAME.
EXISTING BRICK PYLON

SECT. AT HEAD OF CHAPEL DOOR
SCALE: 1½"=1'-0"

WOOD PANEL ABOVE CHAPEL DOOR
SCALE: 3/4"=1'-0"

F.S. PROFILE OF RAFTER ENDS

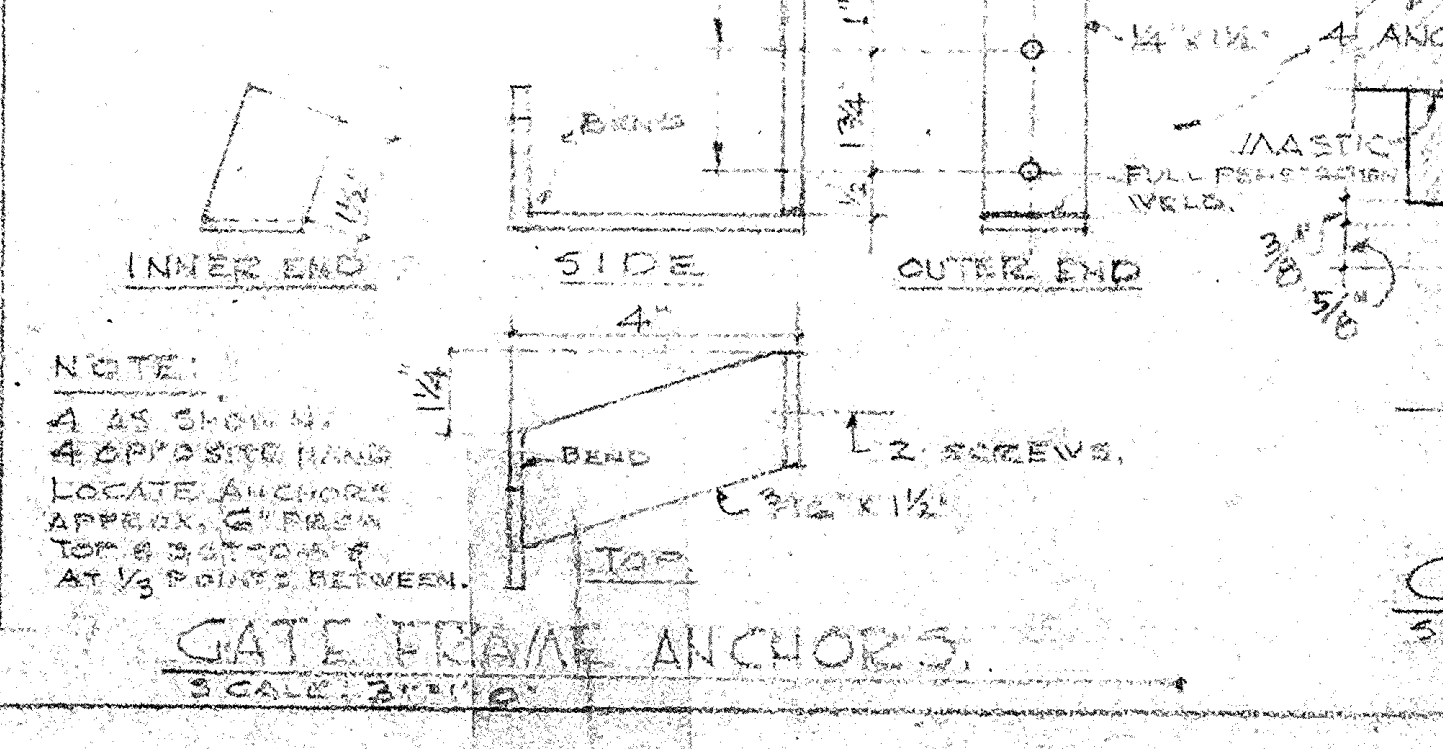

NOTE:
4 AS SHOWN
4 OPPOSITE HAND
LOCATE ANCHORS APPROX. 6" FROM TOP & BOTTOM & AT ⅓ POINTS BETWEEN.

GATE FRAME ANCHORS
SCALE: 3"=1'-0"

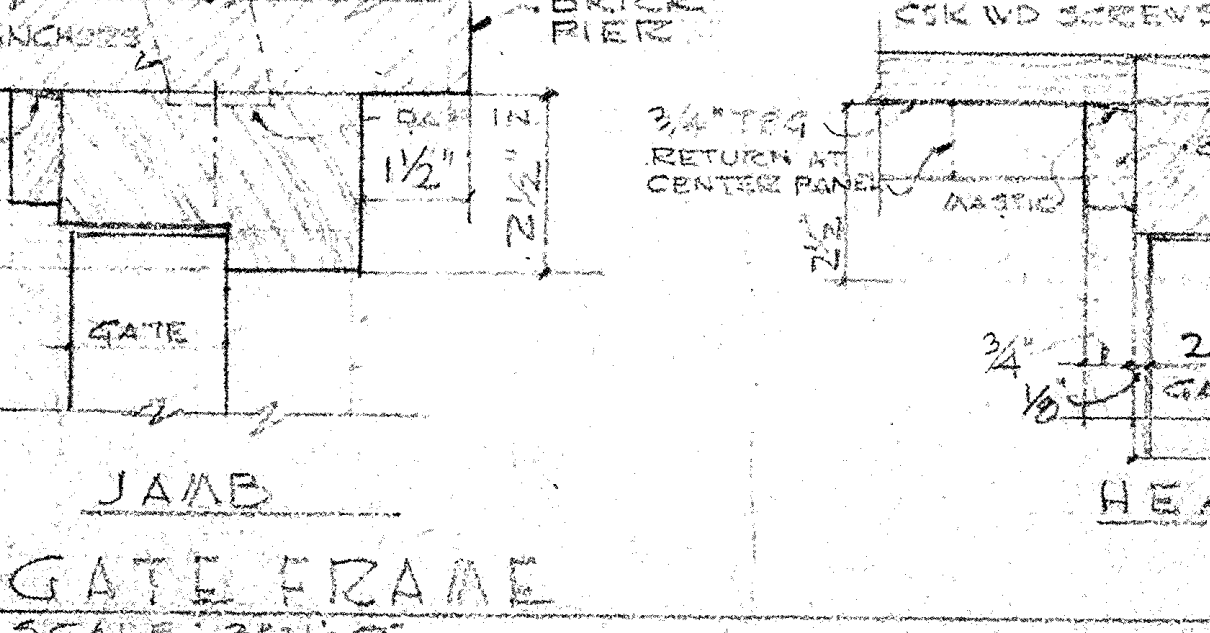

JAMB HEAD
GATE FRAME
SCALE: 3"=1'-0"

PAVED AREA & CHAPEL ENTRY

REVISIONS	NEW SITE DEVELOPMENT & CHAPEL ENTRY FOR ST. EDMUND'S EPISCOPAL CHURCH 1175 SAN GABRIEL BLVD., SAN MARINO, CALIFORNIA	
OCT. 13, 64		
DRAWN BY O.F.S. TRACED BY DATE SEPT. 25, 64	BREO FREEMAN ARCHITECT 45 SOUTH MARENGO PASADENA 1, CALIFORNIA	JOB NO. 923 SHEET NO. 2 OF TWO